

Rittal – The System.

Faster – better – everywhere.

► Punched section with mounting flange, 23 x 64 mm for VX – VX 8617.130

Date : Jun 17, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Punched section with mounting flange, 23 x 64 mm for VX – VX 8617.130

created: 17.06.2019 on www.rittal.com/com-en

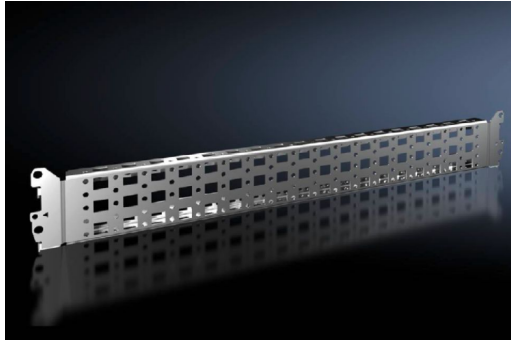

Product description

Description:	For variable, individual interior installation of the enclosure frame on the inner mounting level.
Benefits:	Simply locate into the system punchings and screw-fasten System punchings on all four sides With slots at the top and bottom for cage nuts, for attaching your own components via metric screws
Material:	Sheet steel
Surface finish:	Zinc-plated
Supply includes:	Assembly parts

Product features

To fit:	Width/height/depth: 600 mm
Installation options:	Base/plinth VX in the width and depth, combined with an base/plinth installation bracket On identical punched sections with mounting flanges
Packs of:	4 pc(s).
Weight/pack:	2.42 kg
Copper weight (kg per piece):	0

EAN: 4028177829138

Customs tariff number: 94039010

ETIM 6.0: EC002625

ETIM 5.0: EC002625

eCl@ss 8.0/8.1: 27189234

eCl@ss 7.0/7.1: 23159101

eCl@ss 6.0/6.1: 23159101

eCl@ss 5.1/5.1.4: 27189250

Product description: VX Punched section, with mounting flange 23 x 64 mm, for inner mounting level, for W/H/D: 600 mm
