


Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0603 X7R 0.47uF 25V(0603B474K250CT)

#### 1. Dimension

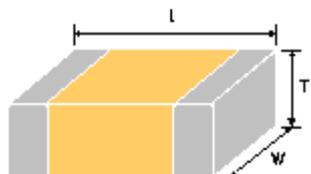

| Size Inch (mm) | L (mm)          | W (mm)          | T (mm)          |
|----------------|-----------------|-----------------|-----------------|
| 0603 (1608)    | 1.60±0.15/-0.10 | 0.80±0.15/-0.10 | 0.80±0.15/-0.10 |


#### 2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @25V, 120sec)

| Item       | Spec        |
|------------|-------------|
| Cap [uF]   | 0.47 (±10%) |
| DF         | ≤ 10%       |
| IR [G-ohm] | ≥ 1.06      |


#### 3. Impedance/ESR-Frequency

(Equipment: 4294A)

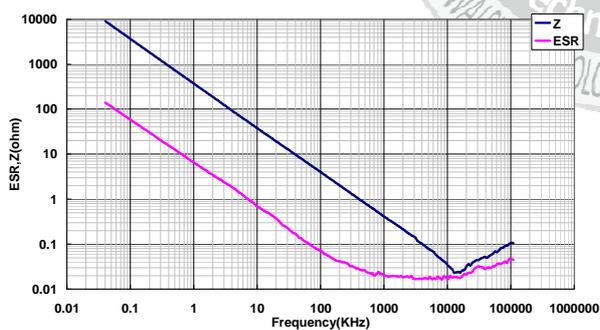


#### 4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

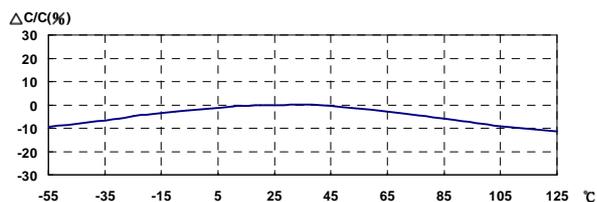

#### 5. Temperature Rise – Ripple Current


(Equipment: 11810)

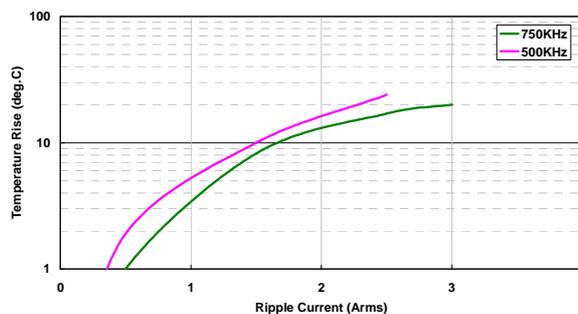

#### 6. Capacitance – DC Voltage Characteristics


(Equipment: 4284A; DC charge 60±5sec)

12V: -30.58% ; 25V: -68.49%

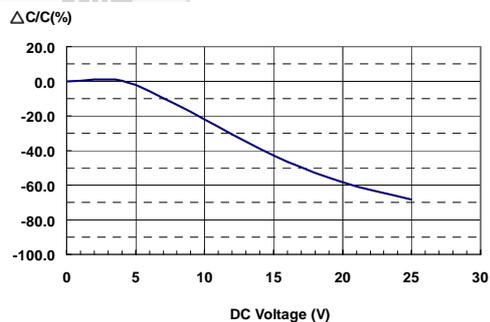

#### 7. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

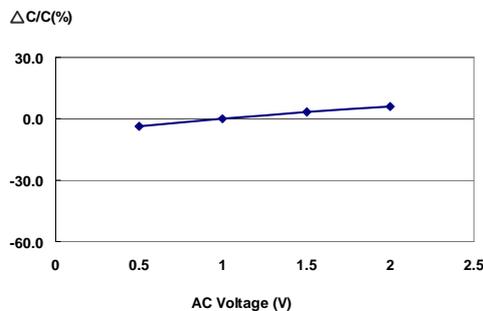

Last updated : 2017/10/26