

CATALOG LISTING
V7-1S17D8


ISSUE
M

7

PAGE 1 OF 1
RELEASE NO. PR-17794

REVISIONS


A	CO-68464	BAB	26 SEP 90
B	CO-74431	JWB	26 FEB 93
C	CO-77116	DCS	31 MAR 94
D	CO-082776	JAF	5 APR 96
E	CO-092478	TSM	21 APR 98
F	CO-93311	TSM	21 OCT 98

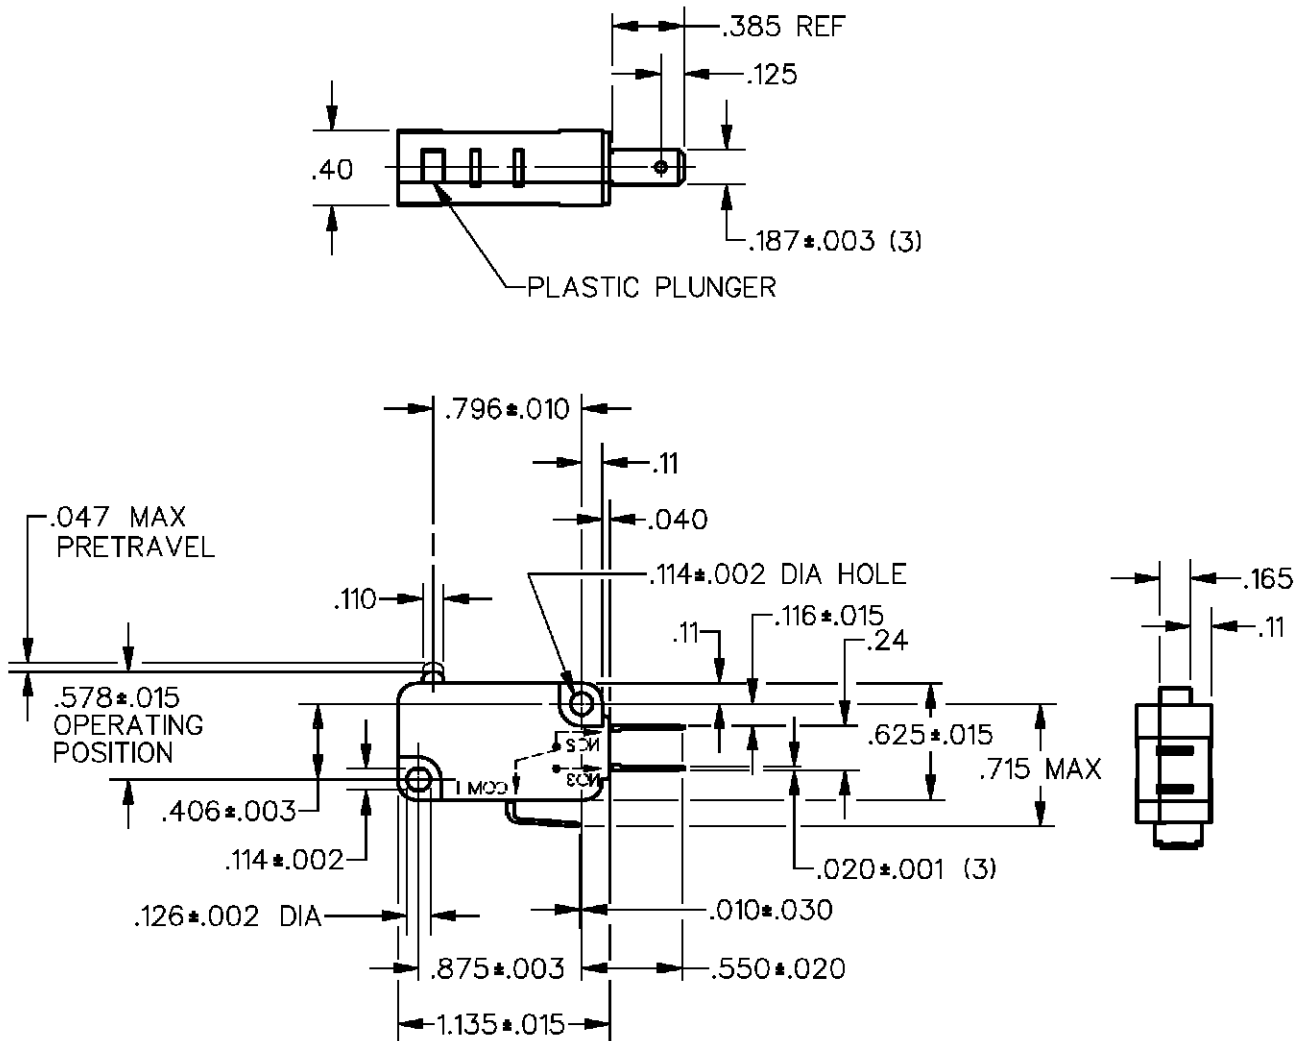


NOTES
1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	ONE PLACE (.0) ±.030
RELEASE FORCE - - - - - 25 GRAMS MIN	0.1A 125 VAC		TWO PLACE (.00) ±.015
DIFFERENTIAL TRAVEL - - - .002-.010			THREE PLACE (.000) ±.005
OVERTRAVEL - - - - - .050 MIN			ANGLES ±
RELEASE TRAVEL - - - - - .010 MIN	L142 		WEIGHT
FREE POSITION - - - - - .625 MAX			

FORMTEK

DRAWN

WJM 20 FEB 90 CHECK DAW 23 FEB 90