## **SS3003CH**

# Schottky Barrier Diode 30V, 3.0A, Low VF, Single CPH6



http://onsemi.com

### **Applications**

· High frequency rectification (switching regulators, converters, choppers)

#### **Features**

· Small switching noise

- · Halogen free compliance
- · Low forward voltage (IF=3A, VF max=0.42V)
- · Ultrasmall package permitting applied sets to be small and slim

### **Specifications**


#### **Absolute Maximum Ratings** at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Repetitive Peak Reverse Voltage	VRRM		30	V
Nonrepetitive Peak Reverse Surge Voltage	VRSM		30	V
Average Output Current	IO		3.0	Α
Surge Forward Current	IFSM	50Hz sine wave, 1 cycle	20	Α
Junction Temperature	Tj		-55 to +125	°C
Storage Temperature	Tstg		-55 to +125	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### **Package Dimensions**

unit : mm (typ) 7018A-012

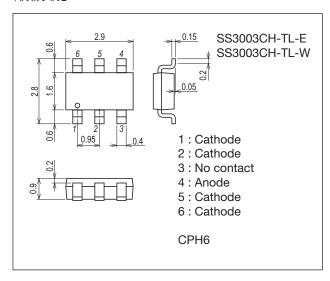


#### **Product & Package Information**

• Package : CPH6

• JEITA, JEDEC : SC-74, SOT-26, SOT-457

• Minimum Packing Quantity : 3,000 pcs./reel


## Packing Type: TL



## Marking



#### **Electrical Connection**



#### ORDERING INFORMATION


See detailed ordering and shipping information on page 2 of this data sheet.

#### Electrical Characteristics at Ta=25°C

Parameter	Symbol	Conditions	Ratings			Unit
		Conditions	min	typ	max	Offit
Reverse Voltage	VR	I <sub>R</sub> =2.0mA	30			V
Forward Voltage	VF	IF=2.0A		0.335	0.385	V
		I <sub>F</sub> =3.0A		0.37	0.42	V
Reverse Current	IR	V <sub>R</sub> =15V			1.4	mA
Interterminal Capacitance	С	V <sub>R</sub> =10V, f=1MHz		90		pF
Reverse Recovery Time	t <sub>rr</sub>	IF=IR=100mA			20	ns
Thermal Resistance	Rth(j-a)	When mounted on ceramic substrate (900mm²×0.8mm)		50		°C/W


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


#### trr Test Cicuit

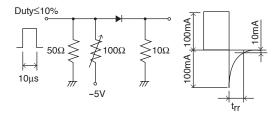


#### **Ordering Information**


Device	Package	Shipping	memo	
SS3003CH-TL-E	CPH6	3,000pcs./reel	Pb-Free	
SS3003CH-TL-W	CPH6	3,000pcs./reel	Pb-Free and Halogen Free	

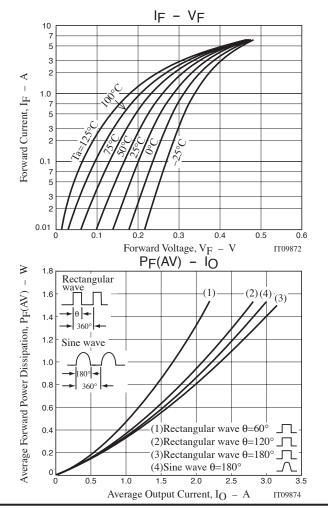

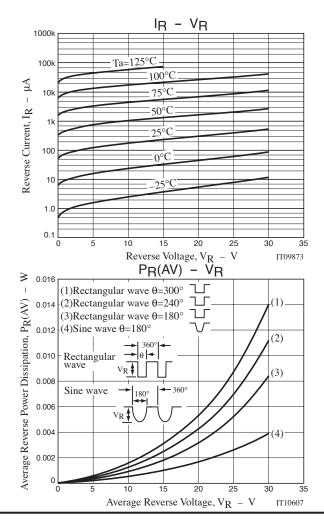

### SS3003CH

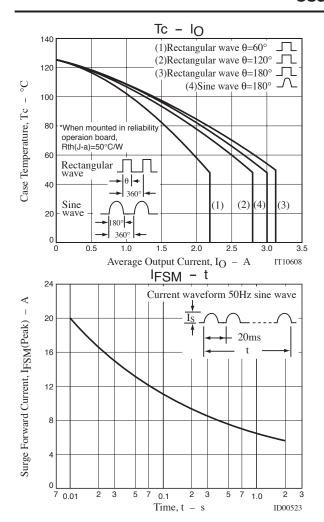

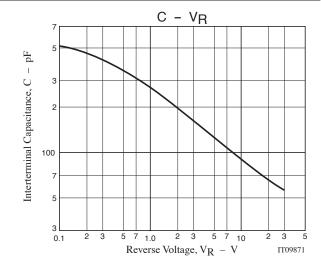


#### **Outline Drawing**

SS3003CH-TL-E, SS3003CH-TL-W

## Mass (g) Unit 0.015 mm 0. 15+0. 1 2. 9±0. 0.6±0. \*1 | \*1 0. 05±0.05 8±0.15 6±0. \*1 0. 95 PIN#1 0.05 \$ \*1:Lot indication

#### **Land Pattern Example**

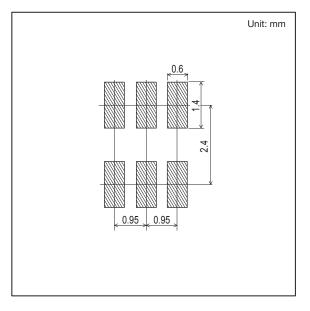

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equa

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## onsemi:

SS3003CH-TL-E SS3003CH-TL-W