
C4532X7T2W474K230KA



TDK item description C4532X7T2W474KT****

Applications	Commercial Grade	~	
	Please refer to Part No. CGA8N4X7T2W474K230KA for Automotive use.		
Feature	Mid Voltage (100 to 630V)		
Series	C4532 [EIA 1812]		
Status	Production	β	



	Size
Length(L)	4.50mm ±0.40mm
Width(W)	3.20mm ±0.40mm
Thickness(T)	2.30mm ±0.20mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	
Recommended Land Pattern (PA)	3.10mm to 3.70mm
Recommended Land Pattern (PB)	1.20mm to 1.40mm
Recommended Land Pattern (PC)	2.40mm to 3.20mm

Electrical Characteristics		
Capacitance	470nF ±10%	
Rated Voltage	450VDC	
Temperature Characteristic	X7T(+22,-33%)	
Dissipation Factor (Max.)	2.5%	
Insulation Resistance (Min.)	1063ΜΩ	

Other		
Soldering Method	Reflow	
AEC-Q200	No	
Packing	Blister (Plastic)Taping [180mm Reel]	
Package Quantity	500pcs	


! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.


C4532X7T2W474K230KA






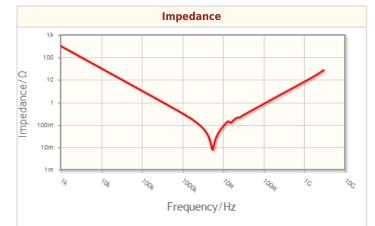



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

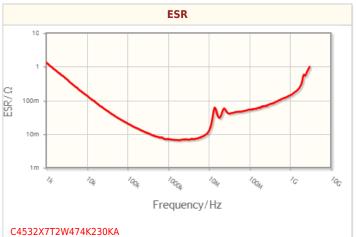


C4532X7T2W474K230KA

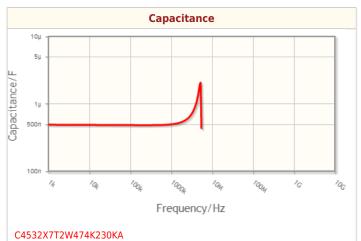

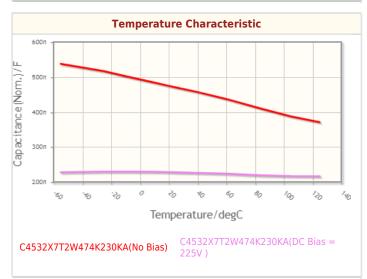

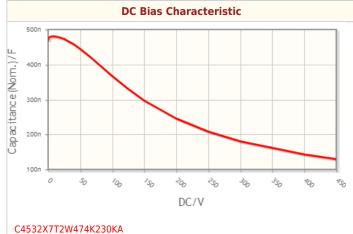

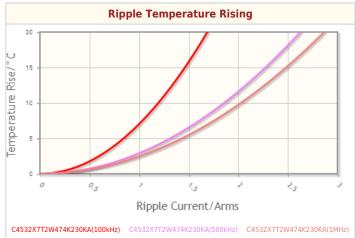


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.



Associated Images

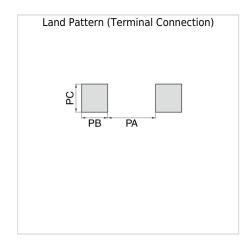

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.