


STANDARD & RUGGED USB 2.0

USB-A/USBR-A/USB-AM SERIES

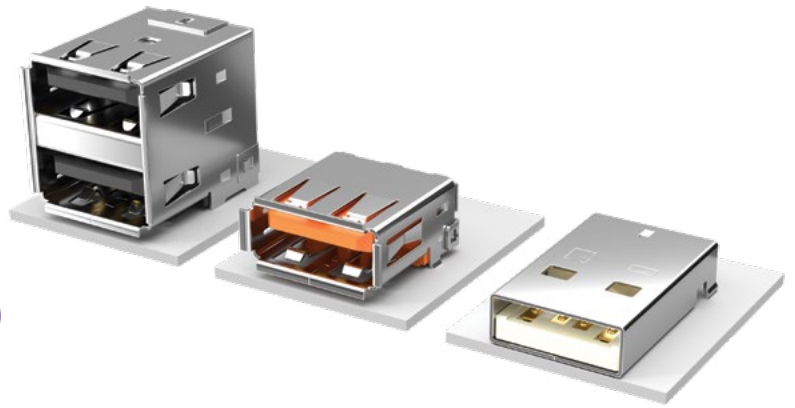

SPECIFICATIONS

Insulator Material:
High Temperature Thermoplastic

Contact Material:
Phosphor Bronze

Plating:
Gold on Contacts, Nickel on Shell, Tin on Tails

Operating Temp Range:
-50 °C to +85 °C

Voltage Rating:
30 VAC

Cycles:
1500 (max tested)

Packaging:
Packaged and shipped in Bulk Packaging Trays; Trays suitable for automation available

Lead-Free Solderable:
-TH & -VU=Yes (Wave Solder only)

TID Numbers (USB-A):
USB-A-D-X-X-TH (61001199)
USB-A-S-X-X-TH (61001180)
USB-A-S-X-X-SM2 (61001152)

TID Number (USB-AM):
USB-AM-S-X-X-SM (61001154)

SERIES	A	SHELL TYPE	PLATING	COLOR	TERMINATION
USB = Standard Connector		-S = Single	-F = Gold Flash on Mating Area, Tin on Tails	-B = Black (USB only)	-TH = Through-hole
USBR = Increased Retention Connector (Complies with Class 1, DIV II minimum withdrawal requirement of 15N.)		-D = Double (-TH option only)	-S = 30 μ" (0.76 μm) Gold on Mating Area, Tin on Tails	-W = White (USB only)	-SM2 = Surface Mount (USB only)
				-O = Orange (USBR only)	-VU = Upright, Through-hole

<p>-SM2</p>	<p>-TH</p>
<p>-VU</p>	<p>-D (Requires -TH)</p>

USB	TYPE	SHELL TYPE	PLATING	COLOR	TERMINATION
	-AM = A Type (Plug)	-S = Single	-F = Gold Flash on Mating Area, Tin on Tails	-B = Black	-TH = Through-hole
			-S = 30 μ" (0.76 μm) Gold on Mating Area, Tin on Tails	-W = White	-SM1 = Surface Mount

<p>-SM1</p>	<p>-TH</p>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[USB-AM-S-S-B-SM1](#) [USB-AM-S-S-B-TH](#) [USB-AM-S-F-W-TH](#) [USB-AM-S-F-B-SM1](#) [USB-AM-S-F-B-TH](#) [USB-AM-S-F-W-SM1](#) [USB-AM-S-S-B-TH-R](#) [USB-AM-S-F-B-SM1-R-TR](#) [USB-AM-S-F-B-SM1-R](#) [USB-AM-S-F-B-SM1-TR](#) [USB-AM-S-F-B-TH-R](#) [USB-AM-S-S-W-SM1](#) [USB-AM-S-S-W-SM1-R-TR](#) [USB-AM-S-S-B-SM1-R-TR](#) [USB-AM-S-F-W-TH-R](#) [USB-AM-S-F-W-SM1-R-TR](#) [USB-AM-S-S-B-SM1-R](#) [USB-AM-S-S-W-SM1-R](#) [USB-AM-S-F-W-SM1-R](#) [USB-AM-S-F-W-SM1-TR](#) [USB-AM-S-S-W-TH](#) [USB-AM-S-S-W-SM1-TR](#) [USB-AM-S-S-B-SM1-TR](#) [USB-AM-S-S-W-TH-R](#)