


## R75MN31505030J

Aliases (75MN31505030J)

R75, Film, Metallized Polypropylene, Automotive Grade, 0.15 uF, 5%, 400 VDC, 85°C, Lead Spacing = 22.5mm

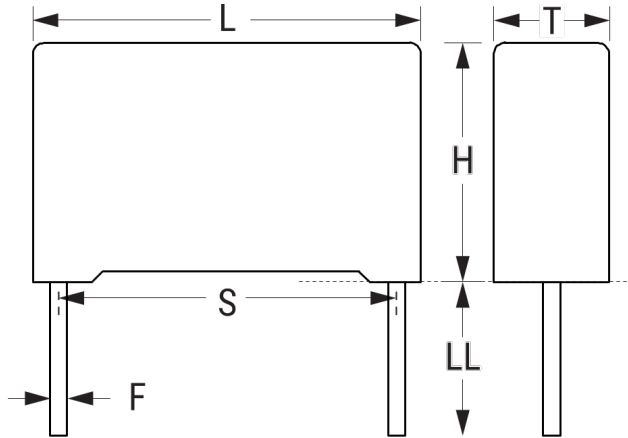

Click [here](#) for the 3D model.

### Dimensions

L	26.5mm +0.3/-0.5mm
H	15mm +0.1/-0.5mm
T	6mm +0.2/-0.5mm
S	22.5mm +/-0.4mm
LL	25mm +2/-1mm
F	0.8mm +/-0.4mm

### Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	500

### General Information

Series	R75
Dielectric	Metallized Polypropylene
Style	Radial
Features	Automotive Grade, Pulse
RoHS	Yes
Lead	Wire Leads
Qualifications	AEC-Q200
AEC-Q200	Yes
Component Weight	2.6 g
Miscellaneous	Above 85C DC voltage derating is 2%/C and AC voltage derating is 1.25%/C .

### Specifications

Capacitance	0.15 uF
Capacitance Tolerance	5%
Voltage AC	220 VAC
Voltage DC	400 VDC
Temperature Range	-55/+105°C
Rated Temperature	85°C
Dissipation Factor	0.05% 1kHz, 0.08% 10kHz
Insulation Resistance	100 GOhms
Max dV/dt	300 V/us
Resistance	18.04 mOhms (100kHz)
Ripple Current	5.053 Amps (100kHz 85C), 45 Amps (Peak)
Inductance	16 nH