AVK& 3.662.813

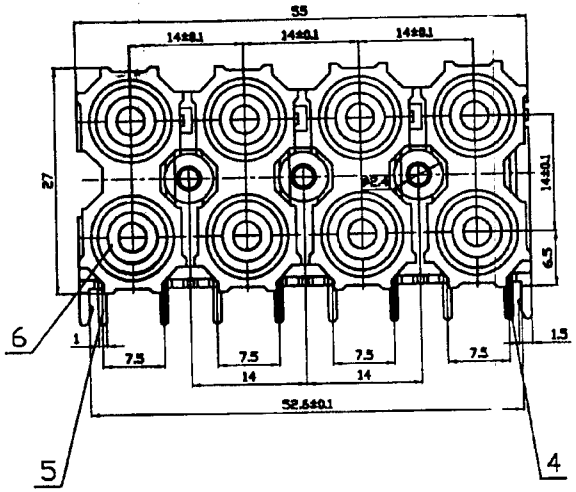

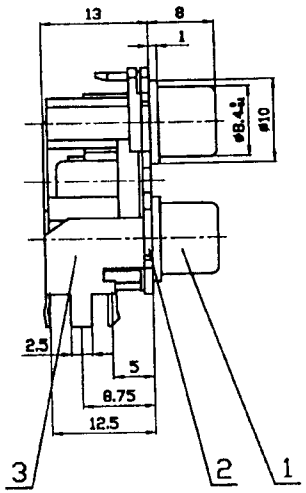

Color layout



Circuit Diagram



Dimensions of PC board hole (Commend)

Top View ⊗

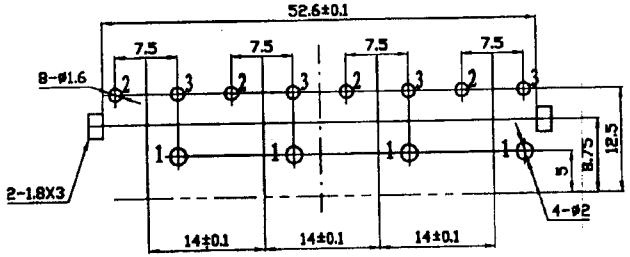

No:	Name	QTY	Material	Plating
6	Washer	8	ABS Resin 94HB	——
5	Short Pincer Needle	4	QSn6.5-0.1 t=0.4	D. CuSn
4	Long Pincer Needle	4	QSn6.5-0.1 t=0.4	D. CuSn
3	Base	1	ABS Resin 94HB	——
2	Cover	4	ABS Resin (Black) 94HB	——
1	Outer Conductor (2)	4	H65 Brass t=0.4	D. CuSn

Technical requirement:

1. This product should meet EU RoHS related requirement.
2. The surface of plastic part should be without any crackle such as burr, lack, and so on phenomenon.
3. The surface of metal part should be without any defect such as scaur, nick, oxidation and plating problem.
4. The electronic performance should be the same as spec.
5. The un-specified tolerance is : 0~6±0.1
   6~20±0.2
   >20±0.3

Number of Old Base Map	
Number of Base Map	
Date	Signer

Sign	Place Number	Changed document number	Signer	Date

Designer	Defu Yang	Standardization	
Verifier	Yazhou Gao	Approved	Xiufeng Hao
Verifier	Lixin Zhou		
Technology		Date	2006.8.11

RS-813

8P RCA JACK

Design Mark	Weight	Proportion
A	18.9g	1:1
1 piece together	the first piece	

DRAGON CITY INDUSTRIES LIMITED 龍豐實業有限公司