



Oscar 40

3G/4G/WiFi Compact Omni Antenna



Key Features

- 3G/4G/WiFi frequency bands
- Compact size
- Wall or pole mountings
- 3 to 5.5dBi Gain

General Description

The Oscar 40 is a great antenna solution covering many popular frequencies in use today. Its radome is UV and water resistant making it a great outdoor antenna.

Suitable for discreet omni antenna applications where a longer one is undesirable. With a peak gain ranging from 3-5.5dBi, depending on frequency, the antenna out-performs many of the larger variants.

It is fitted with an aluminium bracket for wall mounting and supplied with a clamp for fitting to a standard mast.

Supplied as standard with an SMA male connector and 5m of cable.

Alternative connectors or cable lengths can be specified for volume orders.

Additional Considerations

- RFID, ISM, WiFi bridging
- Public Wireless systems
- Covers cellular/PCS (US and worldwide)







Oscar 40

3G/4G/WiFi Compact Omni Antenna


Electrical Specifications

Impedance:	50 Ohm
VSWR:	<1.5
Peak Gain:	3 - 5.5dB
Frequency range:	800-960MHz / 1710 - 2700MHz
Max power:	20W
Polarization:	Vertical, Linear

Mechanical Specifications

Dimensions:	L180 x Ø 60mm
Connector:	SMA Male
Radiator:	Aluminium
Radome:	PVC, UV protection
Lightning protection:	Direct ground
Wind loading:	180km/h
Mounting method:	Wall/Pole Mount

Radiation Patterns H Plane

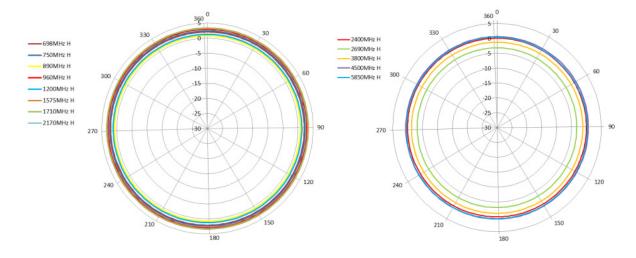






Oscar 40

3G/4G/WiFi Compact Omni Antenna

E Plane

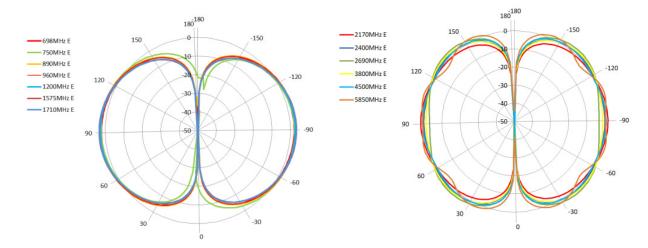

Pole Mounting Detail



Ordering Details

Part Number Description

OSCAR40/5M/LL/SMAM/S/S/33 3G/4G/WiFi Compact Omni Antenna