



# DATA SHEET

## BAS19W~BAS21W

### SURFACE MOUNT SWITCHING DIODES

**VOLTAGE** 120-250 Volts      **POWER** 200mWatts


**SOT-323**      Unit : inch(mm)

#### FEATURES

- Fast switching speed.
- Surface mount package Ideally Suited for Automatic insertion
- Electrically Identical to Standard JEDEC
- High Conductance

#### MECHANICAL DATA

Case: SOT-323, Plastic  
 Terminals: Solderable per MIL-STD-750, Method 2026  
 Approx. Weight: 0.001 gram

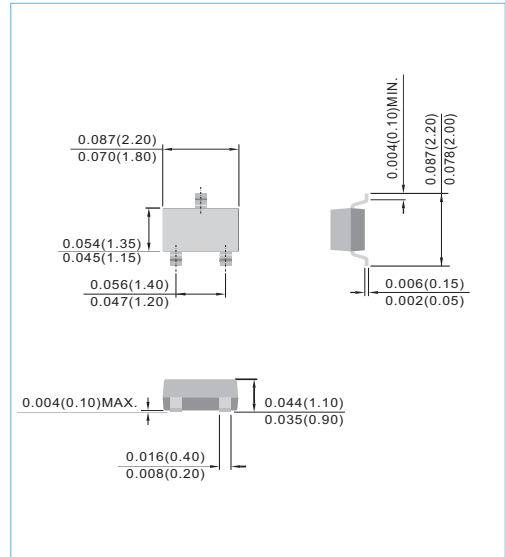


### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS





Ratings at 25°C ambient temperature unless otherwise specified. For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	BAS19W	BAS20W	BAS21W	UNITS
Marking Code		A 8	A 80	A 82	
Reverse Voltage	$V_R$	100	150	200	V
Peak Reverse Voltage	$V_{RM}$	120	200	250	V
Rectified Current (Average), Half Wave Rectification with Resistive Load and $f \geq 50$ Hz	$I_D$	200			mA
Peak Forward Surge Current, 1.0us	$I_{FSM}$	4.0			A
Power Dissipation Derate Above 25°C	$P_{TOT}$	200			mW
Maximum Forward Voltage at 0.1A	$V_F$	1.0			V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_J = 25^\circ C$	$I_R$	0.1			uA
Typical Junction Capacitance (Notes1)	$C_J$	5.0			pF
Maximum Reverse Recovery (Notes2)	$T_{RR}$	50			ns
Typical Thermal Resistance	$R_{\theta JA}$	625			°C / W
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150			°C

**NOTE:**

1.  $C_J$  at  $V_R=0, f=1MHz$
2. From  $I_F=10mA$  to  $I_R=1mA, V_R=6Volts, R_L=100\Omega$



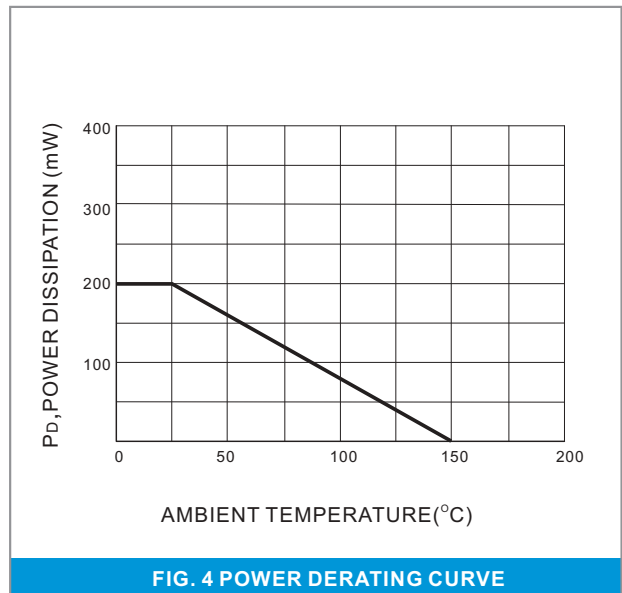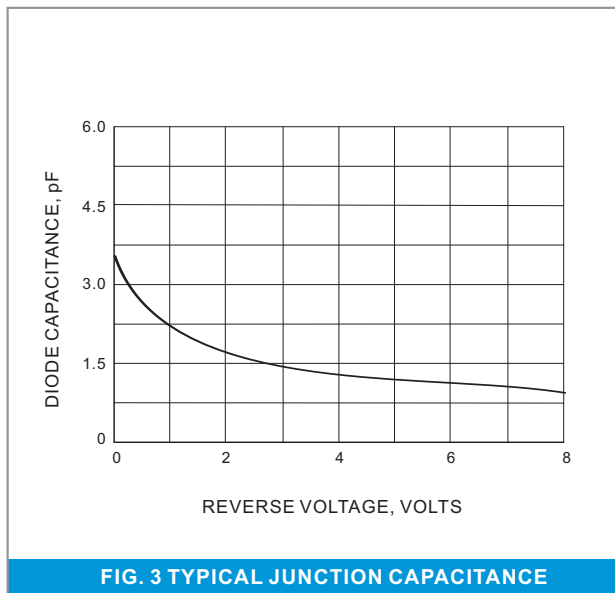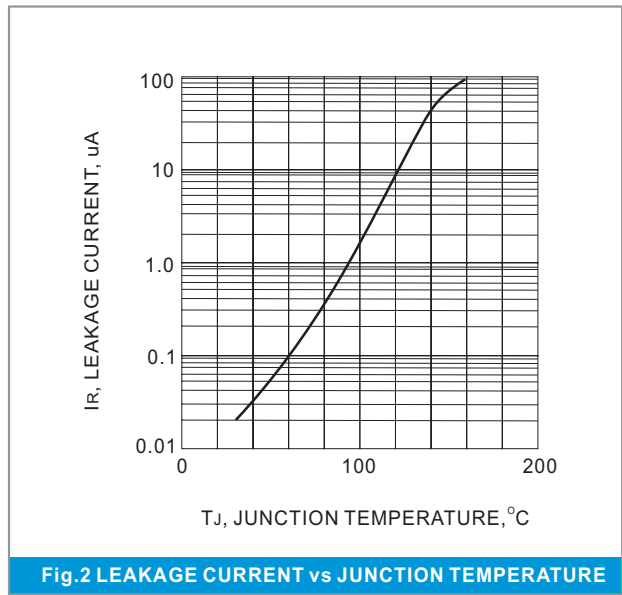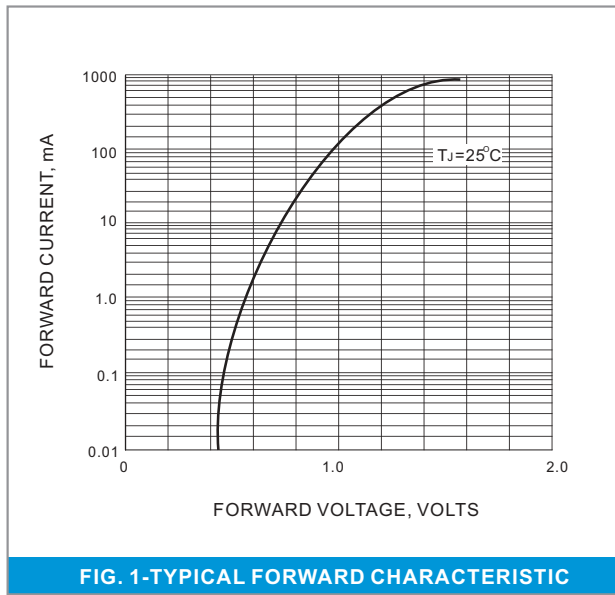





---

## MOUNTING PAD LAYOUT

---

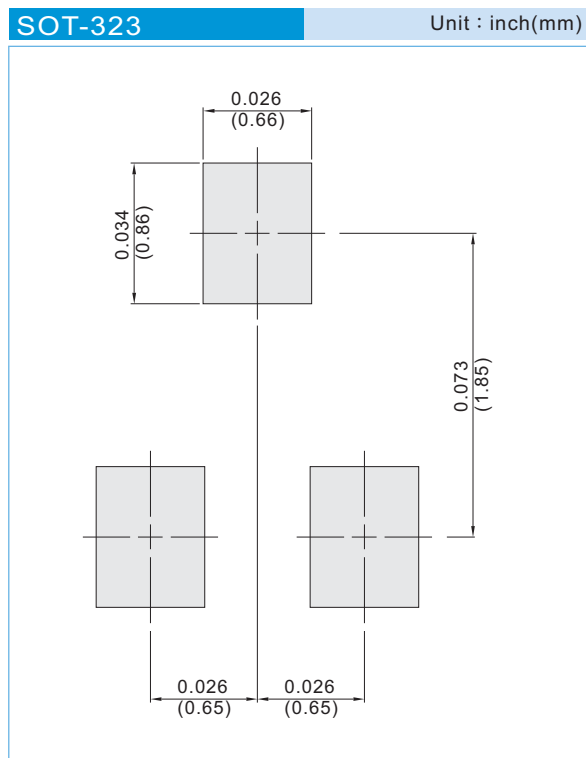


---

## ORDER INFORMATION

---

- Packing information
  - T/R - 12K per 13" plastic Reel
  - T/R - 3K per 7" plastic Reel

---

## LEGAL STATEMENT

---

### Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.