8Ω Miniature Speaker with Leads



RoHS Compliant



Specifications

Rated Impedance : $8\Omega \pm 15\%$ (2k Hz/2.37Vrms/in 1cc box)

Rated Input Power in 1cc box : 0.7W

Max. Input Power in 1cc box : 1W

Resonant Frequency in1cc box : 800 ±20%Hz
Frequency Range : 500Hz-10,000Hz

Sound Pressure Level : 93dB ±3dB (2.37V/0.1M at 2kH in 1cc box)

Total harmonic distortion at 0.7W, 1kHz, 10cm : 10% Max.

Operating Temperature : -20°C to +70°C


Storage Temperature : -40°C to +85°C

Weight : 1.8g

Material

Frame : PPA Yoke : SPCC Diaphragm : PEEK Voice Coil : Copper Wire : SPCC Main and Deputy Plates Main and Deputy Magnets : NdFeB : PPA Front Cover Solder Joints : SUS Lead Wire : 1571 30#


Diagram

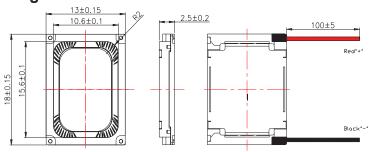

Dimensions : Millimetres

Tolerance: ±0.2mm

Frequency Curve

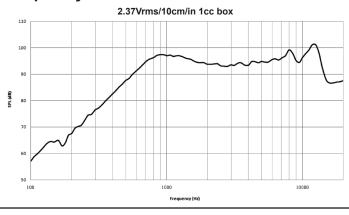


Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro




8Ω Miniature Speaker with Leads



Speaker Distortion Curve

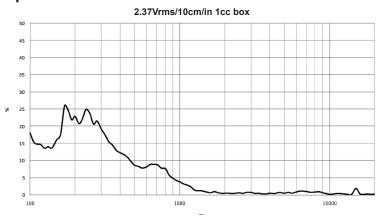

Impedance Response Curve

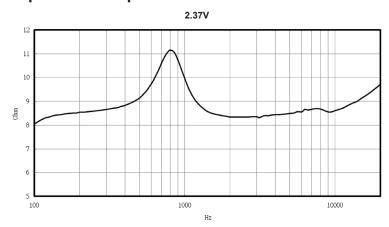

Part Number Table

Description	Part Number
Miniature Speaker with Leads, 8Ω, 1W, 100mm Leads	MP006240

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

