


DC/DC Converter

TDN 1WISM Series, 1 Watt

- Compact SMD package
13,2 × 9,1 × 10,2 mm
- Fully regulated outputs
- I/O-isolation 1'600 VDC
- Operating temperature range
-40°C to +90°C without derating
- Short circuit protection
- Remote On/Off
- 3-year product warranty
- Designed to meet UL 62368-1
(UL 60950-1)



The TDN 1WISM Series comprises 1 Watt fully regulated, high performance DC/DC converters. They come in a compact cubical package of only 1.23 cm³. Full load operation is reliable up to 90°C environment temperature. With 1'600 VDC I/O-isolation voltage, external On/Off, and short current protection they cover a wide range of application when space is limited. The input of the converters is designed for a wide voltage range (4:1) and minimum load is not required. The functional I/O-isolation system is designed to meet IEC/EN 62368-1 with a test voltage (60 s) of 1500 VDC.

Also see:

TDN 1WI, DIP version

www.tracopower.com/products/tdn1wi.pdf

Models				
Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
TDN 1-1210WISM	4.5 – 18 VDC (12 VDC nominal)	3.3 VDC	300 mA	77 %
TDN 1-1211WISM		5.0 VDC	200 mA	79 %
TDN 1-1219WISM		9.0 VDC	112 mA	79 %
TDN 1-1212WISM		12 VDC	90 mA	81 %
TDN 1-1213WISM		15 VDC	70 mA	81 %
TDN 1-1215WISM		24 VDC	45 mA	80 %
TDN 1-1221WISM		± 5.0 VDC	±100 mA	77 %
TDN 1-1222WISM		±12 VDC	±45 mA	80 %
TDN 1-1223WISM		±15 VDC	±35 mA	81 %
TDN 1-2410WISM	9 – 36 VDC (24 VDC nominal)	3.3 VDC	300 mA	76 %
TDN 1-2411WISM		5.0 VDC	200 mA	78 %
TDN 1-2419WISM		9.0 VDC	112 mA	79 %
TDN 1-2412WISM		12 VDC	90 mA	81 %
TDN 1-2413WISM		15 VDC	70 mA	81 %
TDN 1-2415WISM		24 VDC	45 mA	80 %
TDN 1-2421WISM		± 5.0 VDC	±100 mA	77 %
TDN 1-2422WISM		±12 VDC	±45 mA	80 %
TDN 1-2423WISM		±15 VDC	±35 mA	81 %
TDN 1-4810WISM	18 – 75 VDC (48 VDC nominal)	3.3 VDC	300 mA	75 %
TDN 1-4811WISM		5.0 VDC	200 mA	78 %
TDN 1-4819WISM		9.0 VDC	112 mA	79 %
TDN 1-4812WISM		12 VDC	90 mA	81 %
TDN 1-4813WISM		15 VDC	70 mA	81 %
TDN 1-4815WISM		24 VDC	45 mA	80 %
TDN 1-4821WISM		± 5.0 VDC	±100 mA	77 %
TDN 1-4822WISM		±12 VDC	±45 mA	80 %
TDN 1-4823WISM		±15 VDC	±35 mA	81 %

Input Specifications

Input current no load	12 Vin models: 20 mA typ 24 Vin models: 10 mA typ. 48 Vin models: 5 mA typ.
Surge voltage (1 s max.)	12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max.
Reflected ripple current	12 Vin models: 15 mAp-p typ., 24 Vin models: 10 mAp-p typ. 48 Vin models: 5 mAp-p typ.
Conducted noise – Filter proposal for complying to class A/B	EN 55032 class A or B (with external components) www.tracopower.com/overview/tdn1wism
ESD (electrostatic discharge)	EN 61000-4-2, air ± 8 kV, contact ± 6 kV, perf. criteria A
Radiated immunity	EN 61000-4-3, 10 V/m, perf. criteria A
Fast transient / surge (with external input capacitor) – External input capacitor	EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 1 kV perf. criteria A all models: Nippon chemi-con KY 220 μ F/100V
Conducted immunity	EN 61000-4-6, 10 Vrms, perf. criteria A
Magnetic field immunity	EN 61000-4-8, 100 A/m continuous, perf. criteria A 1000 A/m 1 second, perf criteria A

Output Specifications

Voltage set accuracy	± 1 % max.
Regulation – Input variation – Load variation 0 – 100 % – Cross regulation - dual output:	0.2 % max. 1 % max. 5 % max. (asymmetrical load 25 % / 100 %)
Temperature coefficient	± 0.02 %/K typ.
Ripple and noise (20 MHz Bandwidth)	30 mVp-p typ.
Start up time (constant resistive load) – Power ON – Remote ON	10 ms max. 10 ms max.
Transient response (25% load step change)	500 μ s typ.
Short circuit protection	continuous, automatic recovery
Capacitive load – Single output – Dual output	3.3 VDC models: 1680 μ F max. 5.0 VDC models: 820 μ F max. 9.0 VDC models: 630 μ F max. 12 VDC models: 470 μ F max. 15 VDC models: 330 μ F max. 24 VDC models: 160 μ F max. ± 5.0 VDC models: 470 μ F max. (each output) ± 12 VDC models: 330 μ F max. (each output) $+15$ VDC models: 220 μ F max. (each output)

General Specifications

Temperature ranges – Operating (natural convection: 20 LFM, 0.1m/s) – Case temperature – Storage temperature	–40°C to +90°C (without derating) +105°C max. –55°C to +125°C
Derating	6.7%/K above 90°C
Humidity (non condensing)	5 – 95 % rel H max.
Isolation voltage – I/O isolation voltage (60 s)	1'600 VDC
Isolation capacitance	50 pF max.
Isolation resistance (@ 500 VDC)	>1 GOhm

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)	8'400'000 h
Switching frequency	100 kHz min. (pulse frequency modulation)
Thermal shock & vibration	MIL-STD-810F
Remote On/Off	<ul style="list-style-type: none"> - On: open circuit or high impedance - Off: 2 – 4 mA current applied via 1kOhm resistor - Off idle current: 2.5 mA max.
Safety standards	<ul style="list-style-type: none"> - Designed to meet (no certification) IEC/EN/UL 62368-1, UL 60950-1
Environmental compliance	<ul style="list-style-type: none"> - Reach www.tracopower.com/products/reach-declaration.pdf - RoHS RoHS directive 2011/65/EU
Moisture sensitivity level (MSL)	IPC J-STD-033C Level 2

Physical Specifications

Casing material	non-conducting plastic
Potting material	silicone (UL 94V-0 rated)
Package weight	2.7 g (0.10 oz)
Lead-free reflow solder process	IPC J-STD-020E

Supporting Documents: www.tracopower.com/overview/tdn1wism

Outline Dimensions

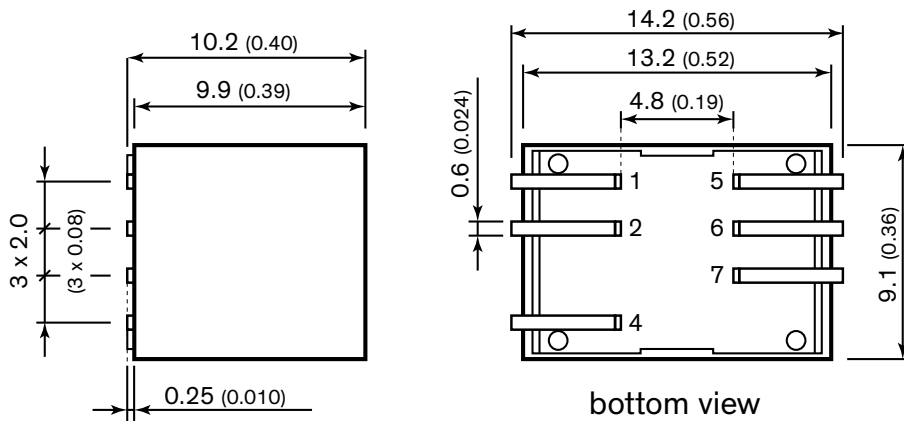

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
4	On/Off	On/Off
5	no con.	-Vout
6	-Vout	Common
7	+Vout	+Vout

Dimensions in [mm], () = Inch

Tolerances: x.x ±0.5 (±0.02)

Pin pitch tolerances ±0.25 (±0.01)

Pin dimension tolerance ±0.1 (±0.004)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[TDN 1-4810WISM](#) [TDN 1-4813WISM](#) [TDN 1-1210WISM](#) [TDN 1-4821WISM](#) [TDN 1-2412WISM](#) [TDN 1-1221WISM](#)
[TDN 1-1223WISM](#) [TDN 1-2422WISM](#) [TDN 1-4822WISM](#) [TDN 1-2423WISM](#) [TDN 1-2421WISM](#) [TDN 1-4812WISM](#)
[TDN 1-4823WISM](#) [TDN 1-1211WISM](#) [TDN 1-2411WISM](#) [TDN 1-2413WISM](#) [TDN 1-2415WISM](#) [TDN 1-4811WISM](#)
[TDN 1-1213WISM](#) [TDN 1-1212WISM](#) [TDN 1-1215WISM](#) [TDN 1-2410WISM](#) [TDN 1-4815WISM](#) [TDN 1-1222WISM](#)
[TDN 1-1219WISM](#) [TDN 1-4819WISM](#) [TDN 1-2419WISM](#)