


■ Features

- High Luminous LEDs
- 2x5x5mm Rectangular Standard Directivity
- UV Resistant Epoxy
- Color Diffused Type
- White Diffused Type for White LED

■ Applications

- Electronic Signs And Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■ Outline Dimension

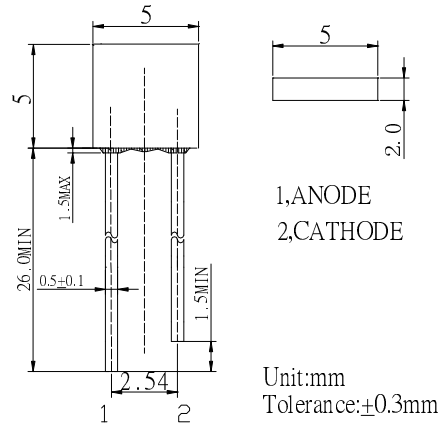


■ Absolute Maximum Rating

(Ta=25°C)

Item	Symbo l	Value		Unit
		W/M/B/PG	Y/O/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current#	I _{FP}	80	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	108	78	mW
Operating Temperature	Topr	-30 ~ +85		°C
Storage Temperature	Tstg	-40 ~ +100		°C
Lead Soldering Temperature	Tsol	260°C/5sec		-

■ Directivity

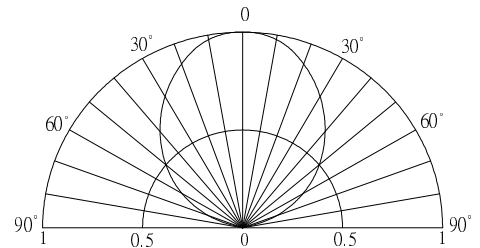

#Pulse width Max 0.1ms, Duty ratio max 1/10

■ Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color		V _F (V)			I _R (μA)	I _v (mcd)*			λD (nm)*			2θ1/2(deg)
			Min.	Typ.	Max.		Min.	Typ.	Max.	Min.	Typ.	Max.	
			I _F =20mA			V _R =5V			I _F =20mA				
OSW5DK7DA2B	White	W	2.8	3.1	3.6	10	750	1120	-	CCT:8000-18000K			100
OSM5DK7DA2B	Warm White	M	2.8	3.1	3.6	10	500	750	-	CCT:2700-3300K			100
OSB5SA7DA4B	Blue	B	2.8	3.1	3.6	10	220	330	-	465	470	475	100
OSG5DA7DA4B	Pure Green	PG	2.8	3.1	3.6	10	750	1120	-	520	525	530	100
OSY5JA7DA4B	Yellow	Y	1.8	2.1	2.6	10	100	150	-	585	590	595	100
OSO5JA7DA4B	Orange	O	1.8	2.1	2.6	10	100	150	-	600	605	610	100
OSR5JA7DA4B	Red	R	1.8	2.1	2.6	10	100	150	-	620	625	630	100

*1 Tolerance of measurements of dominant wavelength is ±1nm

*2 Tolerance of measurements of chromaticity coordinate is ±10%

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V