ENG. NO.	HEADER MATERIAL	FINISH OF PIN
5569-NA1	NYLON 66, UL94V-2, COLOR: NATURAL	MATTE TIN 2.54µm MIN. OVER NICKEL 1.27µm MIN.
-NA1-210	NYLON 66, UL94V-0, COLOR: NATURAL	
-NA1-400	NYLON 66, UL94V-0, COLOR: BLACK	
-NAG1	NYLON 66, UL94V-2, COLOR: NATURAL	GOLD 0.76µm MIN. AND TIN OVER 2.54µm MIN. OVER NICKEL 1.27µm MIN.
-NAG1-210	NYLON 66, UL94V-0, COLOR: NATURAL	
-NA1G-400	NYLON 66, UL94V-0, COLOR: BLACK	
-NAIGS2	NYLON 66, UL94V-2, COLOR: NATURAL	GOLD 0.38µm MIN. AND TIN OVER 2.54µm MIN. OVER NICKEL 1.27µm MIN.
-NAIGS2-210	NYLON 66, UL94V-0, COLOR: NATURAL	
-NAIGS3	NYLON 66, UL94V-2, COLOR: NATURAL	GOLD 1.27µm MIN. AND TIN OVER 2.54µm MIN. OVER NICKEL 1.27µm MIN.
5569-NAIGS3-210	NYLON 66, UL94V-0, COLOR: NATURAL	

NOTES:
1. MATERIAL:
   HOUSING MATERIAL: SEE CHART
   TERMINAL MATERIAL: BRASS ALLOY
2. FINISH: SEE CHART
3. PRODUCT SPECIFICATION: PS-5556-001
4. PACKAGING SPECIFICATION: SEE CHART
   BULK PACKED PER PK-5569-NA8 OR PK-5569-002
   TRAY PACKED PER PK-5569-004, 39295083 IS TRAY PACKED
5. MATES WITH 5557 SERIES MINIFIT JR RECEPTACLE
6. FOR THE 2 CIRCUITS HEADER, THIS DIMENSION IS 4.2 MM
7. DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE HEADER ASSEMBLY.
8. PARTS ARE NOT DESIGNED FOR CURRENT SHARING.
9. CONNECTORS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
10. PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
11. FORMING MARKS ON PINS ARE ACCEPTABLE.
12. CORNER CORE-OUTS ARE OPTIONAL AND MAY OR MAY NOT BE PRESENT.
13. TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.

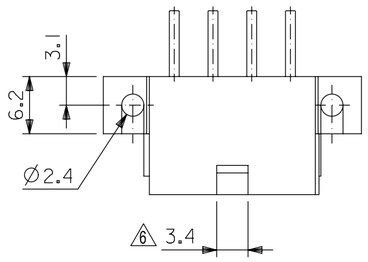

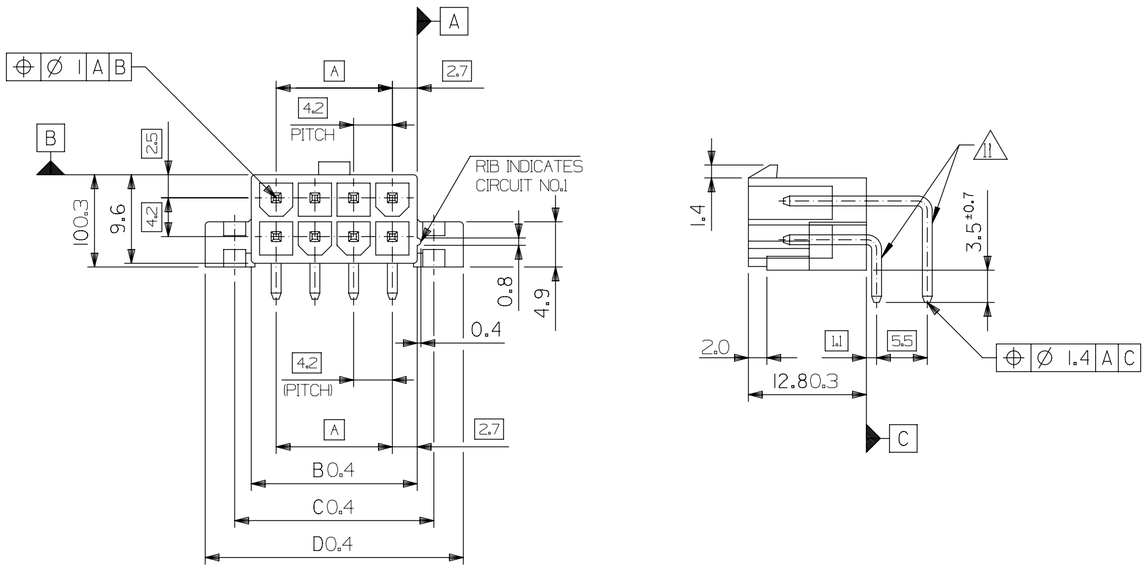

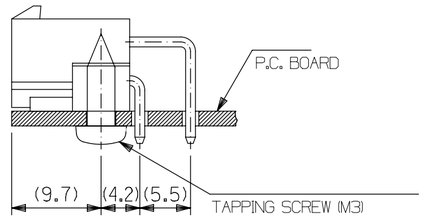

RECOMMENDED INSTALLATION

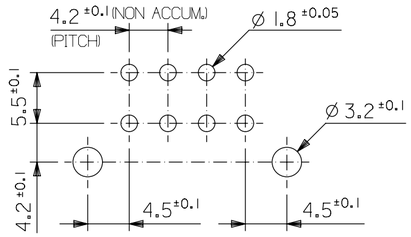

RECOMMENDED PCB HOLE LAYOUT
VIEWED FROM COMPONENT SIDE
1.78 MAX. THICK P.C. BOARD

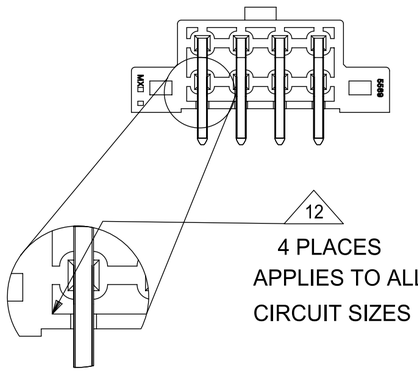

61.6	55.2	51.6	46.2	24
57.4	51	47.4	42	22
53.2	46.8	43.2	37.8	20
49	42.6	39	33.6	18
44.8	38.4	34.8	29.4	16
40.6	34.2	30.6	25.2	14
36.4	30	26.4	21	12
32.2	25.8	22.2	16.8	10
28	21.6	18	12.6	8
23.8	17.4	13.8	8.4	6
19.6	13.2	9.6	4.2	4
15.4	9	5.4	——	2
D	C	B	A	NO. OF CIRCUITS

RELEASE STATUS | | RELEASE DATE |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

QUALITY SYMBOLS
FA = 0
FC = 0
FD = 0
▼ = 0
C = 0
☒ = 0
■ = 0
G = 0

EC NO: 107415 2016/08/23
DRWN: CSLAFTER 2016/09/20
CHK'D: JBELL 2016/09/23
APPR: FSMITH
REV: M2
ADD DETAIL 1 VIEW

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	±
2 PLACES	± 0.2	±
1 PLACES	± 0.2	±
0 PLACES	±	±

ANGULAR TOL ± 3.0

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS: MM ONLY
SCALE: 2:1
DRWN BY: H. HIRAMOTO DATE: '90/04/23
CHK'D BY: M. FUKUSHIMA DATE: '91/07/04
APPR BY: M. ENOMOTO DATE: '91/07/04
DRAWING SIZE: C
THIRD ANGLE PROJECTION

molex®

MINI FIT JR RIGHT ANGLE
HEADER ASSY WITH FLANGES

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
5569	SEE CHART	GENERAL MARKET

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
SD-5569-002	PSD	000	1 OF 2

FORMAT: Eng-ipg-master-tb-proto-C
REVISION: C
DATE: 2016/02/04



14 CKTS.



12 CKTS.



16 CKTS.



10 CKTS.



18 CKTS.



8 CKTS.



20 CKTS.



6 CKTS.



22 CKTS.



4 CKTS.



24 CKTS.



2 CKTS.

CIRCUIT SIZE LAYOUT
(SCALE 2:1)

BULK PACKED ⚠4				
39-29-4249	5569-24AG1-210	39-29-1247	5569-24A1-210	24
-4229	-22AG1-210	-1227	-22A1-210	22
-4209	-20AG1-210	-1207	-20A1-210	20
-4189	-18AG1-210	-1187	-18A1-210	18
-4169	-16AG1-210	-1167	-16A1-210	16
-4149	-14AG1-210	-1147	-14A1-210	14
-4129	-12AG1-210	-1127	-12A1-210	12
-4109	-10AG1-210	-1107	-10A1-210	10
-4089	-08AG1-210	-1087	-08A1-210	8
-4069	-06AG1-210	-1067	-06A1-210	6
-4049	-04AG1-210	-1047	-04A1-210	4
39-29-4029	5569-02AG1-210	39-29-1027	5569-02A1-210	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CIRCUIT SIZE
5569-NAG1-210		5569-NA1-210		
39-29-5243	5569-24AG1	39-29-1248	5569-24A1	24
-5223	-22AG1	-1228	-22A1	22
-5203	-20AG1	-1208	-20A1	20
-5183	-18AG1	-1188	-18A1	18
-5163	-16AG1	-1168	-16A1	16
-5143	-14AG1	-1148	-14A1	14
-5123	-12AG1	-1128	-12A1	12
-5103	-10AG1	-1108	-10A1	10
⚠4 -5083	-08AG1	-1088	-08A1	8
-5063	-06AG1	-1068	-06A1	6
-5043	-04AG1	-1048	-04A1	4
39-29-5023	5569-02AG1	39-29-1028	5569-02A1	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE
5569-NAG1		5569-NA1		
				24
				22
				20
				18
				16
				14
				12
				10
				8
				6
39-34-7045	5569-04AIGS3-210	39-34-7043	5569-04AIGS2-210	4
39-34-7025	5569-02AIGS3-210	39-34-7023	5569-02AIGS2-210	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE
5569-NAIGS3-210		5569-NAIGS2-210		
				24
				22
				20
				18
				16
				14
				12
				10
				8
				6
39-34-7044	5569-04AIGS3	39-34-7042	5569-04AIGS2	4
39-34-7024	5569-02AIGS3	39-34-7022	5569-02AIGS2	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE
5569-NAIGS3		5569-NAIGS2		

TRAY PACKED ⚠4				
46999-0791	5569-24A1G-400	46999-0779	5569-24A1-400	24
-0790	-22A1G-400	-0778	-22A1-400	22
-0789	-20A1G-400	-0777	-20A1-400	20
-0788	-18A1G-400	-0776	-18A1-400	18
-0787	-16A1G-400	-0775	-16A1-400	16
-0786	-14A1G-400	-0774	-14A1-400	14
-0785	-12A1G-400	-0773	-12A1-400	12
-0784	-10A1G-400	-0772	-10A1-400	10
-0783	-08A1G-400	-0771	-08A1-400	8
-0782	-06A1G-400	-0770	-06A1-400	6
-0781	-04A1G-400	-0769	-04A1-400	4
46999-0780	5569-02A1G-400	46999-0768	5569-02A1-400	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CIRCUIT SIZE
5569-NA1G-400		5569-NA1-400		

QUALITY SYMBOLS	
FA	= 0
FC	= 0
FP	= 0
▼	= 0
C	= 0
☒	= 0
■	= 0
C	= 0

ADD DETAIL 1 VIEW 2016/08/23
EC NO: 107415 2016/09/20
DRWN: CSLAFTER 2016/09/23
CHK'D: JBELL
APPR: FSMITH
REV M2

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	±
2 PLACES	± 0.2	±
1 PLACES	± 0.2	±
0 PLACES	±	±

ANGULAR TOL ± 3.0

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: MM ONLY
SCALE: 2:1
DRWN BY: H. HIRAMOTO DATE: '90/04/23
CHK'D BY: M. FUKUSHIMA DATE: '91/07/04
APPR BY: M. ENOMOTO DATE: '91/07/04
DRAWING SIZE: C
THIRD ANGLE PROJECTION

molex®

MINI FIT JR RIGHT ANGLE HEADER ASSY WITH FLANGES

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
5569	SEE CHART	GENERAL MARKET

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
SD-5569-002	PSD	000	2 OF 2

RELEASE STATUS: P1 | RELEASE DATE: 23.09.2016 15:46:35

FORMAT: Engdrg-master-Bynro5-C
REVISION: C
DATE: 2016/02/04