



EC6A SERIES

7.5WATT 2:1 INPUT RANGE

DC-DC CONVERTERS



FEATURES

- * 7.5W Isolated Output
- * 24-Pin DIP Package
- * Efficiency to 87%
- * 2:1 Input Range
- * Regulated Outputs
- * Pi Input Filter
- * Continuous Short Circuit Protection
- * UL60950-1 Approval
- * Without Tantalum Capacitor Inside
- * Safety Meets IEC/EN/UL 62368-1



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD		
EC6A01	9-18 VDC	5 VDC	0 mA	1500 mA	25 mA	781 mA	80	4700uF
EC6A02	9-18 VDC	12 VDC	0 mA	625 mA	25 mA	753 mA	83	4700uF
EC6A03	9-18 VDC	15 VDC	0 mA	500 mA	25 mA	744 mA	84	4700uF
EC6A04	9-18 VDC	±5 VDC	0 mA	±750 mA	30 mA	772 mA	81	2200uF
EC6A05	9-18 VDC	±12 VDC	0 mA	±310 mA	30 mA	753 mA	83	2200uF
EC6A06	9-18 VDC	±15 VDC	0 mA	±250 mA	30 mA	753 mA	83	2200uF
EC6A07	9-18 VDC	3.3 VDC	0 mA	1500 mA	25 mA	529 mA	78	4700uF
EC6A11	18-36 VDC	5 VDC	0 mA	1500 mA	20 mA	377 mA	83	4700uF
EC6A12	18-36 VDC	12 VDC	0 mA	625 mA	20 mA	359 mA	87	4700uF
EC6A13	18-36 VDC	15 VDC	0 mA	500 mA	20 mA	359 mA	87	4700uF
EC6A14	18-36 VDC	±5 VDC	0 mA	±750 mA	25 mA	372 mA	84	2200uF
EC6A15	18-36 VDC	±12 VDC	0 mA	±310 mA	25 mA	356 mA	87	2200uF
EC6A16	18-36 VDC	±15 VDC	0 mA	±250 mA	25 mA	372 mA	84	2200uF
EC6A17	18-36 VDC	3.3 VDC	0 mA	1500 mA	20 mA	264 mA	78	4700uF
EC6A21	36-72 VDC	5 VDC	0 mA	1500 mA	10 mA	193 mA	81	4700uF
EC6A22	36-72 VDC	12 VDC	0 mA	625 mA	10 mA	184 mA	85	4700uF
EC6A23	36-72 VDC	15 VDC	0 mA	500 mA	10 mA	182 mA	86	4700uF
EC6A24	36-72 VDC	±5 VDC	0 mA	±750 mA	15 mA	191 mA	82	2200uF
EC6A25	36-72 VDC	±12 VDC	0 mA	±310 mA	15 mA	182 mA	85	2200uF
EC6A26	36-72 VDC	±15 VDC	0 mA	±250 mA	15 mA	184 mA	85	2200uF
EC6A27	36-72 VDC	3.3 VDC	0 mA	1500 mA	10 mA	136 mA	76	4700uF

NOTE: 1. Nominal Input Voltage: 12, 24 or 48VDC

SPECIFICATIONS

All Specifications Typical at Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	12V	9-18V
	24V	18-36V
	48V	36-72V
Input Surge Voltage (100ms max.)	12V	20Vdc max.
	24V	50Vdc max.
	48V	100Vdc max.
Input Filter	Pi Type	

OUTPUT SPECIFICATIONS:

Voltage Accuracy	±2.0% max.	
Voltage Balance (Dual)	±1.0% max.	
Temperature Coefficient	±0.05%/°C max.	
Ripple & Noise, 20MHz BW	100mV pk-pk max.	
Short Circuit Protection	Continuous	
Line Regulation Single/Dual (note1)	±0.2% max.	
Load Regulation Single (note2)	±0.5% max.	
	Dual (note3)	±1.0% max.
Start up Time	EC6A0XX	5ms typ.
	Other	20ms typ.


GENERAL SPECIFICATIONS:

Efficiency	See Table	
Isolation Resistance	10 ⁹ ohm min.	
Isolation Capacitance	560pF typ.	
Isolation Voltage	1500VDC min.	
Switching Frequency	300KHz typ.	
Operating Ambient Temperature Range	-40°C to +85°C	
De-rating, Above 71°C	Linearly to Zero Power at 100°C	
Case Temperature (note5)	100°C max.	
Cooling	Natural Convection	
Storage Temperature Range	-40°C to +100°C	
Humidity	95% RH max. Non Condensing	
MTBF	MIL-HDBK-217F, GB, 25°C, Full Load	1800Khrs typ.
Dimensions	DIP	1.25x0.80x0.40 inches (31.8x20.3x10.2 mm)
	SMD	1.25x0.80x0.45 inches (31.8x20.3x11.4 mm)
Weight	18.4g	
Case Material	Black Coated Copper with Non-Conductive Base	


NOTE:

1. Measured from high line to low line.
2. Measured from full load to 10% load.
3. Measured from full load to 1/4 load.
4. Suffix "S" to the model number with SMD packages.
5. Maximum case temperature under any operating condition should not be exceeded 100°C

Typical Derating curve for Natural Convection

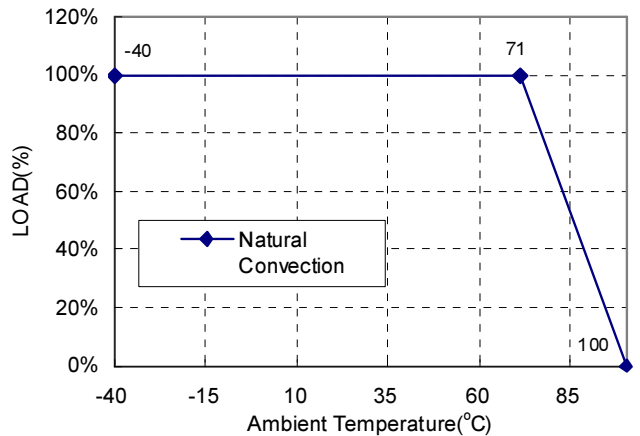

Case A Dimensions:

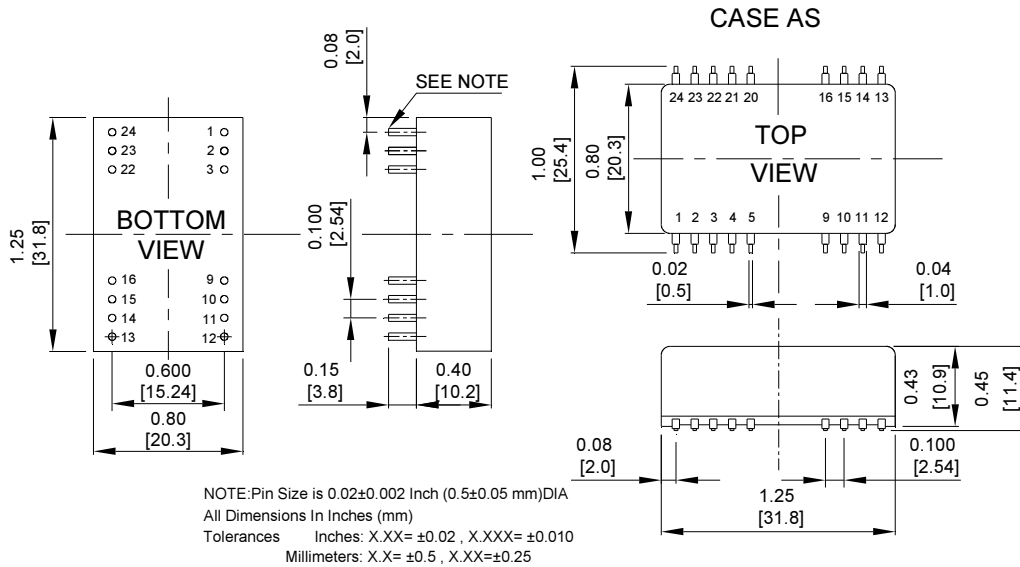

Pin	PIN CONNECTION			
	Single Output		Dual Output	
	DIP	SMD	DIP	SMD
1,24	NP	NC	NP	NC
2,3	-V Input		-V Input	
4,5	NP	NC	NP	NC
9	NC		Common	
10,15	NC		NC	
11	NC		-V Output	
12,13	NP	NC	NP	NC
14	+V Output		+V Output	
16	-V Output		Common	
20,21	NP	NC	NP	NC
22,23	+V Input		+V Input	

* NC-NO CONNECTION WITH PIN
 * NP-NO PIN

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[EC6A27](#) [EC6A01](#) [EC6A02](#) [EC6A03](#) [EC6A04](#) [EC6A05](#) [EC6A06](#) [EC6A07](#) [EC6A11](#) [EC6A12](#) [EC6A13](#) [EC6A14](#)
[EC6A15](#) [EC6A16](#) [EC6A17](#) [EC6A21](#) [EC6A22](#) [EC6A23](#) [EC6A24](#) [EC6A25](#) [EC6A13S](#) [EC6A03S](#) [EC6A24S](#)
[EC6A11S](#) [EC6A27S](#) [EC6A02S](#) [EC6A15S](#) [EC6A26](#) [EC6A25S](#) [EC6A23S](#) [EC6A04S](#) [EC6A12S](#) [EC6A22S](#)
[EC6A05S](#) [EC6A07S](#) [EC6A21S](#) [EC6A06S](#) [EC6A17S](#) [EC6A26S](#) [EC6A01S](#) [EC6A14S](#) [EC6A16S](#)