

2 W

DC- 18 GHz


SMA

COAXIAL ATTENUATOR

issue
04.aug.93

Page
1 / 1

DRAWING

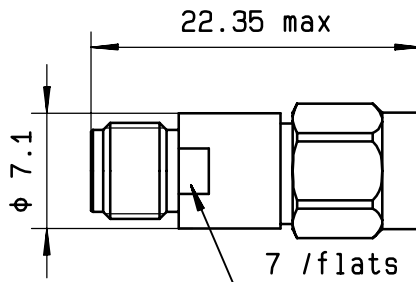

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 18 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 10 dB

FREQUENCY	DC- 2 GHz	2 - 4 GHz	4 - 8 GHz	8 -12.4GHz	12.4- 18 GHz
V.S.W.R	<= 1.10	<= 1.15	<= 1.20	<= 1.25	<= 1.35
DEVIATION (dB)	+0.5 /- 0.5	+0.5 /- 0.5	+0.5 /- 0.5	+0.5 /- 0.5	+0.5 /- 0.5

TEMPERATURE SENSITIVITY : $4 \times 10^{-4} \frac{dB}{dB \times ^\circ C}$


PEAK POWER at 25°C (1µs,1%.) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

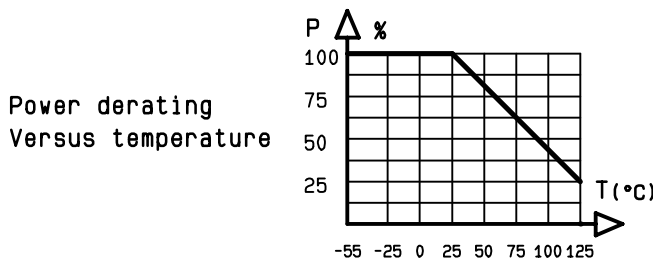

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4112-9211

QUALITY Dpt app. _____			
CREATION			
PEN : CAT	04.aug.93	New format	VE
EP : -----	25.apr.89	New format	KL
Nom : KL			
Date:14.dec.87	ISSUE	REVISIONS	NAME

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R413810000](#)