

Motor protection relay, phase failure/single-phase sensitive. Three-pole (three-phase), manual resetting. Direct mounting on BG06, BG09, BG12 mini-contactors, 0.14...0.23A




Product designation	11RF9		
Product type designation	Motor protection relay		
General characteristics			
Number of poles	Nr.	3	
Overvoltage category	III		
Pollution degree	3		
Frontal IP degree	IP20		
Type of release	Thermal		
Protection fuse			
	aM (IEC)	A	0.5
	RK5 (UL)	A	1
Phase failure detection	yes		
Reset mode	Manual		
Power circuit characteristics			
Rated insulation voltage U_i IEC/EN	V	690	
Rated impulse withstand voltage U_{imp}	kV	8	
Rated operational voltage	V	690	
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current I_e			
	Operational current min	A	0.14
	Operational current max	A	0.23
Tripping class	10A		
Test Button	yes		
Trip indicator	yes		
Terminals			
	type	screw and washer	
	screw	M4	
	width	mm	9.8
	tool	Phillips 2	
Tightening torque for terminals			
	min	Nm	2.3
	max	Nm	2.3
	min	Ibin	1.7
	max	Ibin	1.7
Conductor section			
	AWG/kcmil max	10	
Auxiliary circuit characteristics			
Auxiliary contacts			
	NO	Nr.	1
	NC	Nr.	1
Auxiliary Rated insulation voltage U_i IEC/EN	V	690	

Motor protection relay, phase failure/single-phase sensitive. Three-pole (three-phase), manual resetting. Direct mounting on BG06, BG09, BG12 mini-contactors, 0.14...0.23A


Auxiliary Rated impulse withstand voltage Uimp		kV	6
Auxiliary Rated operational voltage		V	690
Operating current AC15	24V	A	3
	120V	A	3
	240V	A	1.5
	380V	A	0.95
	480V	A	0.75
	500V	A	0.72
Operating current DC13	600V	A	0.6
	125V	A	0.11
	600V	A	0.22
IEC Conventional free air thermal current Ith		A	10
Terminals			
	Auxiliary circuit type		screw and washer
	Auxiliary circuit screw		M3,5
	Auxiliary circuit width	mm	8
	Auxiliary circuit tool		Phillips 1
Conductor section			
	Auxiliary circuit Flexible w/o lug max	mm ²	2.5
	Auxiliary circuit Flexible c/w lug max	mm ²	2.5
Tightening torque for terminals			
	Auxiliary circuit min	Nm	1
	Auxiliary circuit max	Nm	1
	Auxiliary circuit min	Ibin	0.74
	Auxiliary circuit max	Ibin	0.74
UL/CSA and IEC/EN 60947-5-1 designation			B600-P600
Ambient conditions			
Operating temperature			
	min	°C	-20
	max	°C	55
Storage temperature			
	min	°C	-55
	max	°C	70
Compensation temperature			
	min	°C	-15
	max	°C	55
Max altitude		m	3000
Mechanical features			
Operating position			
	normal allowable		Vertical plan ±30°
Fixing			Direct mounting on BG06... BG09... BG12...
Weight		g	116
UL technical data			
Full-load current (FLA) for three-phase AC motor			
	at 480V	A	0.23
	at 600V	A	0.23

Dimensions

Motor protection relay, phase failure/single-phase sensitive. Three-pole (three-phase), manual resetting. Direct mounting on BG06, BG09, BG12 mini-contactors, 0.14...0.23A

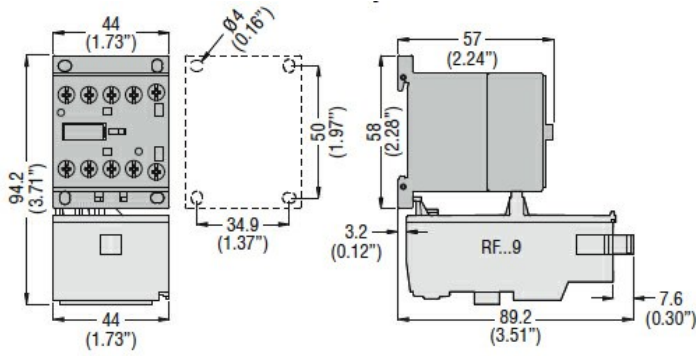

Wiring diagrams

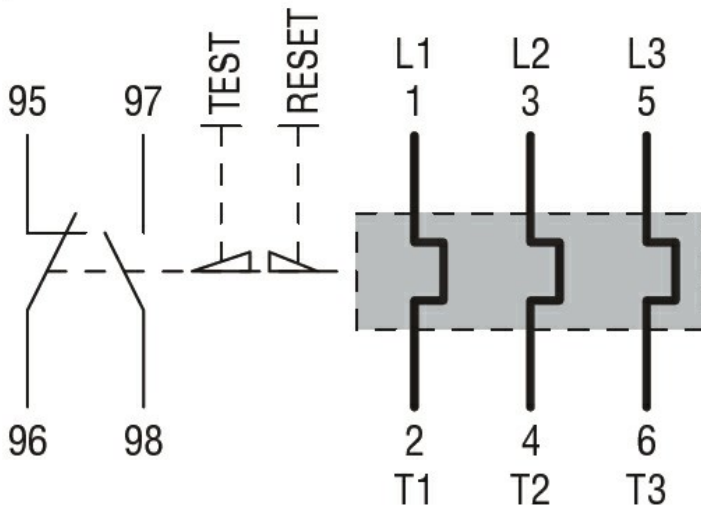

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508

Certifications

CCC

CSA

cULus

EAC

ETIM classification

ETIM 8.0

EC000106 -
Thermal overload
relay