

PS Series Socket (Receptacle Connector for Boardto-Board)

2.54 mm Pitch Socket Receptacle for Board-to-Board Connection



Intermatable with PS series Original pin header

Parallel/ Vertical board-to-board connections

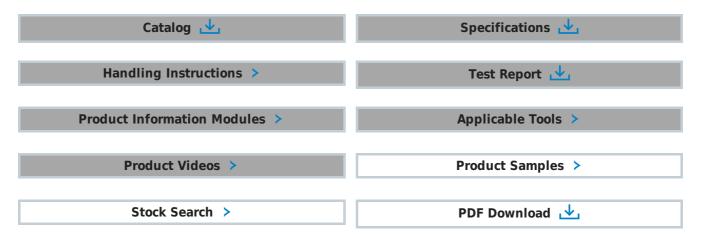

Features

2.54mm pitch socket receptacle for board-to-board connection

General Specifications

Number of Contacts	1 row: 5, 10, 15, 20, 25, 30, 2 rows: 10, 16, 20, 26, 30, 34, 40, 50, 60
Contact Pitch	2.54 mm (1 row/ 2 rows)

Rated Current	3 A
Dielectric Withstanding Voltage	1000 VACr.m.s. (1 minute)
Insulation Resistance	1000 megohm min.
Contact Resistance	10 milliohm max.
Operating Temperature Range	-55 deg. C to +85 deg. C
Applicable PCB Thickness	1.6 mm

Notice

- The values specified in this web site are only for reference. The products and their specifications are subject to change without notice. Contact our sales staff for further information before considering or ordering any of our products. For purchase, a product specification must be agreed upon.
- 2. Users are requested to provide protection circuits and redundancy circuits to ensure safety of the equipment, and sufficiently review the suitability of JAE's products to the equipment.
- 3. The products presented in this web site are designed for the uses recommended below.

We strongly suggest you contact our sales staff when considering use of any of the products in any other way than the recommended applications or for a specific use that requires an extremely high reliability.

(1) Applications that require consultation:

*Please contact us if you are considering use involving a quality

assurance program that you specify or that is peculiar to the

industry, such as:

Automotive electrical components, train control, telecommunications devices (mainline), traffic light control, electric power, combustion control, fire prevention or security systems, disaster evention equipment, etc.

*We may separately give you our support with a quality assurance

program that

you specify, when you think of a use such as :

Aviation or space equipment, submarine repeaters, nuclear power control systems, medical equipment for life support, etc.

This site uses cookies to improve its performance, enhance your user experience and tailor advertising. By using this site you consent to the use of cookies as described in our usage policy unless you have changed your cookie settings. Please click <u>here</u> for more information.

Accept and Hide This Message

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JAE Electronics:

PS-SLA-C2-1-100 PS-5SD-S4C2 PS-D4C26 PS-12SLA-D4C2 PS-20PE-D4T2-M1E PS-SR20M2 PS-10PE-D4T2-M1E PS-SR60M2 PS-10PE-D4LT1-PN1 PS-D4C10 PS-D4C40 PS-D4C16 PS-50PE-D4T1-LP1 PS-2SH4-1 PS-10PE-D4T1-PN1 PS-50PE-D4T1-M1AE PS-16PE-D4T1-LP1 PS-20SEN-D4P1-1C PS-10PE-S4R1-A1 PS-HD10-R PS-10SEN-D4P1-1D PS-16PE-D4LT1-PN1 PS-10PE-D4LT1-LP1 PS-34SM-D4P1-1C PS-50PE-D4R1-A1 PS-10PF-D4T1-PKL1 PS-20PE-D4LT2-M1E PS-34PE-D4T2-M1E PS-40PE-D4LT2-M1E PS-HD16-R PS-40PE-D4T1-LP1 PS-HD26-R PS-D4C34 PS-10PLB-D4T1-FL1E PS-26PE-D4T2-M1E PS-10PE-D4T1-B1E PS-16PE-D4T1-B1E PS-20PE-D4T1-B1E PS-40PE-D4LT1-PN1 PS-26PE-D4T1-B1E PS-20PE-D4T2-SM1E PS-26PE-D4LT1-B1E PS-SRN16 PS-HD34-R PS-D4C20 PS-D4C50 PS-40PE-D4T2-M1E PS-6SD-S4C2 PS-40PE-D4LT1-B1E PS-16SM-D4P1-1C PS-34PE-D4LT2-SM1E PS-50PE-D4LT1-LP1 PS-50PE-D4LT2-SM1AE PS-5PE-S4T1-PN1 PS-SR20M PS-HD20-R PS-SR50M2 PS-D4C60 PS-20PE-D4LT1-PN1 PS-40SEN-D4P1-1D PS-M40PE08-D4S1-M1 PS-34PE-D4LT1-SM1E PS-16PE-D4LT1-LP1 PS-SF-C1-1-5000 PS-SR26M2 PS-SR16M PS-16SEN-D4P1-1C PS-10SEN-D4P1-1C PS-14PLB-D4T1-FL1E PS-6PLB-D4T1-FL1E PS-8PLB-D4LT1-FL1E PS-20PLB-D4T1-FL1E PS-20FE-D4LT1-FL1E PS-20FE-D4LT