




2.5 x 2.0mm SMD Crystal

C2BS
(former FX252BS)
DATASHEET

- Tolerances down to 10 PPM
- Stabilities down to 10 PPM

• C2BS STANDARD SPECIFICATIONS	
PARAMETERS	MAX (unless otherwise noted)
Frequency Range	12.000 ~ 80.000 MHz
Frequency Tolerance @ 25°C	(See options on page 2)
Frequency Stability, ref @ 25°C Over Operating Temp Range	(See options below)
Temperature Range Operating (T _{OPR}) Storage (T _{STG})	(See options below) -55°C ~ +125°C
Shunt Capacitance (C ₀)	3 pF
Load Capacitance (C _L)	(See options on page 2)
Drive Level	100 μW
Aging per year	±5 PPM
Reflow Soldering Temperature	260°C x 10 Seconds x 2
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam
Lead (Pb) Free	Yes
RoHS / REACH Compliant	Yes

Frequency Range (MHz)	Operating Mode	Max ESR Ω
12.000 ~ 13.999999	Fundamental	200
14.000 ~ 15.999999	Fundamental	150
16.000 ~ 19.999999	Fundamental	90
20.000 ~ 23.999999	Fundamental	70
24.000 ~ 24.999999	Fundamental	60
25.000 ~ 44.999999	Fundamental	50
45.000 ~ 80.000	Fundamental	40

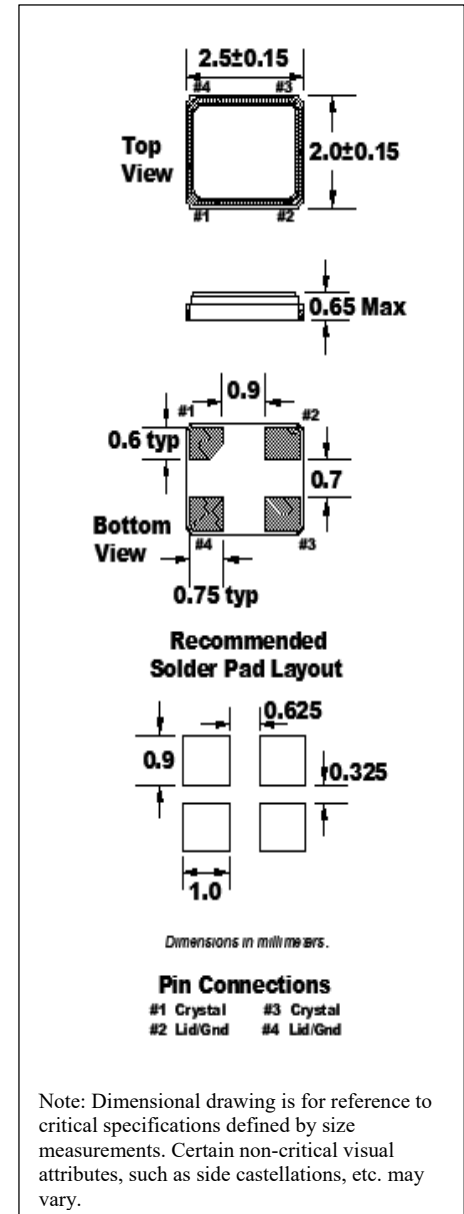

• Available Operating Temperatures and Stabilities*

Operating Temperature	±10 PPM	±15 PPM	±20 PPM	±25 PPM	±30 PPM	±50 PPM	±100 PPM
0°C to +70°C	O	O	O	O	O	O	N/A
-10°C to +60°C	O	O	O	O	O	O	N/A
-10°C to +70°C	O	O	O	O	O	O	N/A
-20°C to +70°C	O	O	O	O	O	O	N/A
-30°C to +85°C	X	O	O	O	O	O	N/A
-40°C to +85°C	X	O	O	O	O	O	N/A
-40°C to +105°C	X	X	X	X	X	O	O
-40°C to +125°C	X	X	X	X	X	O	O
-55°C to +125°C	X	X	X	X	X	O	O

Key: O=Available, X=Not Available N/A=Not applicable *Does not imply a stocked part.






2.5 x 2.0mm SMD Crystal

C2BS
(former FX252BS)
DATASHEET

• TAPE SPECIFICATIONS (millimeters)						
A	B	C	D	E	F	Reel QTY
Ø1.55	4.0	4.0	3.5	8.0	0.65	-T3 = 3,000 -T2 = 2,000 -T1 = 1,000

• REEL SPECIFICATIONS (millimeters)						
G	H	I	J	K	L	M
2.0	Ø13	Ø21	Ø60	Ø180	9.0	2.0

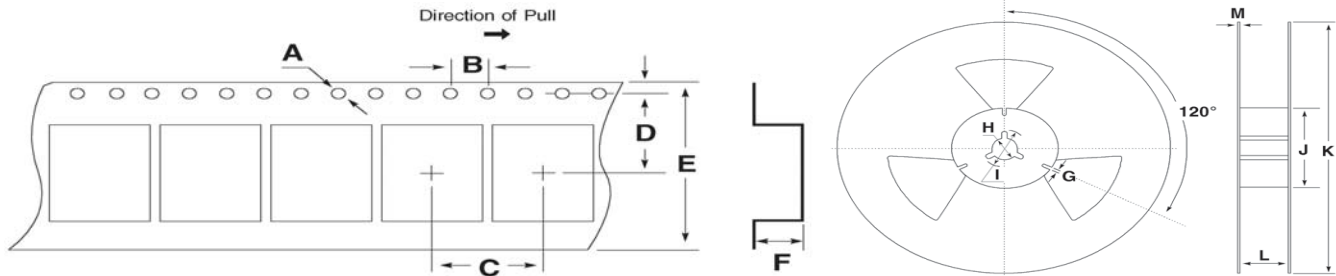

Available Options & Part Identification for Ceramic SMD Crystal C2BS¹

F C2BS C C D M 24.0

F	C2BS	C	C	D	M	24.0
FOX	Model Number	Tolerance	Stability	Load Capacitance ²	Operating Temperature	Frequency (MHz)
		B = ±50 PPM C = ±30 PPM D = ±25 PPM E = ±20 PPM F = ±15 PPM H = ±10 PPM	A = ±100 PPM B = ±50 PPM C = ±30 PPM D = ±25 PPM E = ±20 PPM F = ±15 PPM H = ±10 PPM	D = 8pF W = 9pF E = 10pF G = 12pF L = 18pF M = 20pF	C = 0 to +70°C D = -10 to +60°C E = -10 to +70°C F = -20 to +70°C K = -30 to +85°C M = -40 to +85°C P = -40 to +105°C I = -40 to +125°C T = -55 to +125°C	

¹Not all frequency, tolerance, stability, load, and operating temperature combinations may be available.

²Listed load capacitances represent the most commonly used. Other load capacitances are available. Contact Fox Technical Support for assistance



Corporate
Headquarters
5570 Enterprise Parkway
Fort Myers, FL 33905
<http://www.FOXONLINE.com>

Sales
1-888-GET-2-FOX (1-888-438-2369) or
1-239-693-0099
<http://www.FOXONLINE.com/repdisty>

Tech Support
<http://www.FOXONLINE.com/email>

PRODUCT USE: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third-party owners.

For datasheet type definitions and a glossary of common terms, visit <http://www.foxonline.com/tgcrystals.html>.

Title / Description: C2BS STANDARD SPECIFICATIONS			
Drawing Number: 100934		Size: A	
Part Number:		Cage: 61429	
Draftsperson: BEC	Approved: MAJ	Revision Date: 06/3/2019	

