




Part Number : [536470674](#)

Product Description : SlimStack Board-to-Board Connector, 0.635mm Pitch, 0.635 Series, Plug, 8.00 or 14.00mm Mated Height, 6.40mm Mated Width, 60 Circuits

Series Number : 53647

Status : Active

Product Category : Board-to-Board Connectors

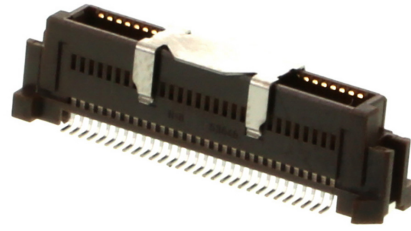

Documents & Resources

Drawings

[Drawing 536470674_sd.pdf](#)

3D Models and Design Files

[3D Model 536470674_stp.zip](#)


Specifications

[Packaging Specification SPK-53647-001-001.pdf](#)

[Product Specification 527600000-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

[Multiple Part Product Compliance Statements](#)

- Eu RoHS
- REACH SVHC
- Low-Halogen

[Multiple Part Industry Compliance Documents](#)

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Board-to-Board Connectors
Series	53647
Description	SlimStack Board-to-Board Connector, 0.635mm Pitch, 0.635 Series, Plug, 8.00 or 14.00mm Mated Height, 6.40mm Mated Width, 60 Circuits
Series Name	0.635, Floating, Rigid
Application	Board-to-Board, Signal
Comments	Stacking-Type
Component Type	PCB Header
Product Family	SlimStack Board-to-Board/Board-to-FPC Connectors
Product Name	SlimStack
UPC	822348204915

Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	100V

Physical

Breakaway	No
Circuits (Loaded)	60
Circuits (maximum)	60
Color - Resin	Brown
Durability (mating cycles max)	50
First Mate / Last Break	No

Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Mated Height	14.00mm, 8.00mm
Mated Width	6.40mm
Material - Metal	Brass, Phosphor Bronze, Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	873.145/mg
Number of Rows	2
Orientation	Vertical
Packaging Type	Embossed Tape on Reel
PCB Locator	Yes
PCB Retention	Yes
Pitch - Mating Interface	0.635mm
Polarized to PCB	Yes
Robotic Placement	Metal Cap
Temperature Range - Operating	-55° to +105°C
Termination Interface Style	Surface Mount

Mates With / Use With

Mates with Part(s)

Description	Part Number
0.635mm Pitch Vertical SlimStack Receptacles	<u>52885</u>
0.635mm Pitch Vertical SlimStack Receptacles	<u>52901</u>

This document was generated on Dec 09, 2023