



NEW 5 sizes for all commercial projects

5 sizes of monobloc trunking available under a single catalogue number (supplied complete with body, cover and dividers).



5 sizes supplied complete: body + cover + dividers



Sockets with Soluclip guaranteed anti-pullout

- ▶ Separation of high and low currents
- ▶ Large capacity in each compartment
- ▶ Extra strength using sockets with Soluclip
- ▶ Ingenious accessories for simple, intuitive installation
- ▶ Easy management: colour code on packaging and accessories for immediate identification



These products are part of solutions for office equipment > See p. 772-773

Snap-on trunking routing sections and accessories

TRUNKING			TRUNKING		
Number of compartments	Cover width	Cross-section (mm)	Monobloc: body + cover ⁽¹⁾	Divider	Fishplate body joint
SNAP-ON COVER(S) 45 mm					
		50 x 80	756 01	756 09	756 61
		50 x 105	756 02	756 09	756 62
		50 x 130	756 03	756 09	756 61
		50 x 145	756 04	756 09	756 63
		50 x 180	756 06	756 09	756 61

(1) Partition(s) integral to the body
(2) Internal and external corner Angles supplied with multi-compartment partition joint

mechanisms for snap-on trunking

Mounting functions

The Soluclip accessory is very easy to install with any Mosaic or Arteor function and offers the following features:

- Anti-slip
- Anti-pullout
- IP 4X
- Perfect cover finish



756 90

Sockets for snap-on trunking


Sockets for snap-on trunking have been specially designed to meet the requirements for installation and use in total compliance with the new standard EN 50085-2-1. The sockets are fitted with the Soluclip accessory which has the following features:

- Anti-slip
- Anti-pullout
- IP 4X
- Perfect finish


		Standard	Tamperproof	Red
2 x 2P+E		772 02	772 22	772 42
3 x 2P+E		772 03	772 23	772 43
Tap-off accessory			771 06	
2 x RJ 45 Cat. 6 - FTP			771 90	
2 x RJ 45 Cat. 5e - FTP			771 80	

AND ACCESSORIES			ANGLES			JUNCTIONS				ACCESSORIES	
Stick-on body joint	Cover joint	End cap	Internal angles ⁽²⁾	External angles	Flat angles	Flat junctions with width 80 mm	Flat junctions with width 105 mm	Angled junctions 85/105/130 mm	Junction with floor duct 50 x 12/92 x 20	Extra cover	Adaptor for modular wiring accessories
756 66	756 69	756 11	756 21	756 31	756 41	756 71	-	756 81 + 756 21	756 88	756 08	310 69
756 67	756 69	756 12	756 22	756 32	756 42	756 72	756 76	756 81 + 756 22	756 88	756 08	310 69
756 66	2 x 756 69	756 13	756 23	756 33	756 43	756 71	756 75	756 81 + 756 23	756 88	756 08	310 69
① 756 66 ② 756 67	2 x 756 69	756 14	756 24	756 34	756 44	① 756 71 ② 756 72	① 756 75 ② 756 76	756 81 + 756 24	756 88	756 08	310 69
756 66	3 x 756 69	756 16	756 26	756 36	756 46	756 71	756 75	756 81 + 756 26	756 88	756 08	310 69


Installation principle for sockets for snap-on trunking

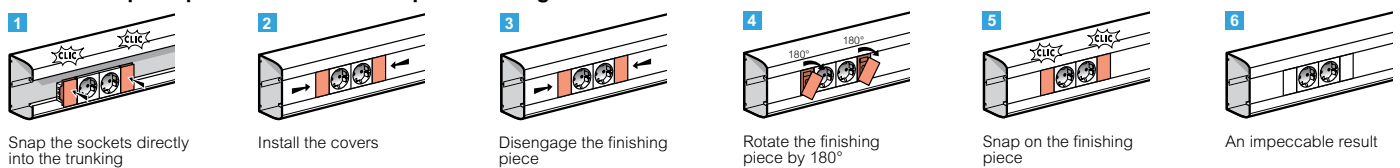

Installation principle for Mosaic or Arteor functions

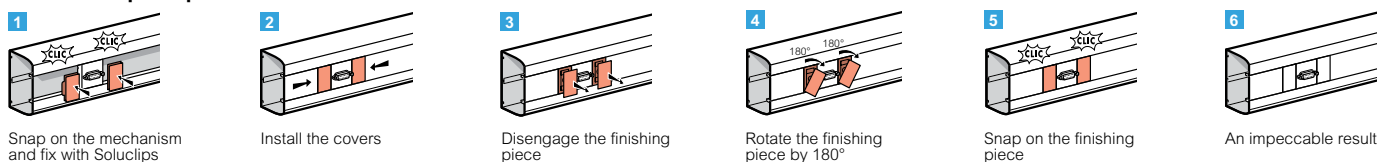

Operating principle for the tap-off accessory

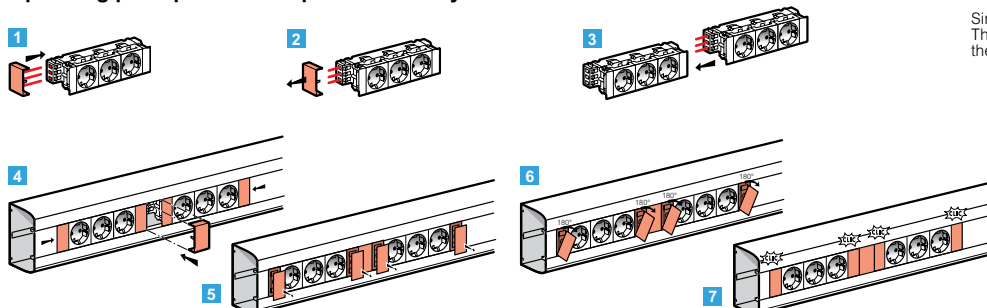

Simple, intuitive tap-off from 2 socket blocks
The tap-off accessory also acts as a finishing piece for the 2 socket blocks



NEW Extra strength with Soluclip sockets

A single catalogue number for anti-pullout, anti-slip and anti-insertion.



It takes just 3 steps to install sockets with Soluclip

► **Quick and easy installation:**

- Snap the socket in place (on all trunking on the market)
- Unlock the Soluclip
- Rotate the Soluclip 180°
- Snap in for perfect finish

► Available with up to 4 recesses for high current and RJ 45 for Cat. 5 or 6 FTP

► Tap-off accessories for easy connection of socket units
















sockets for snap-on trunking



772 02



756 90


Pack	Cat.Nos	Sockets for snap-on trunking
	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  White </div> <div style="text-align: center;">  Tamperproof </div> </div>	<p>Sockets with connection at both sides for snap-on mounting on trunking with 45 mm cover. Particularly suitable for installation on snap-on trunking (p. 816 - 817) The sockets incorporate the Soluclip accessory to hold the socket in place and comply with the standard Connected with automatic terminals</p> <p>Standard and tamperproof sockets German Standard</p>
10	772 02 772 22	 2 x 2P+E
10	772 03 772 23	 3 x 2P+E
	<div style="text-align: center;">  Red </div>	<p>Red sockets German Standard Sockets with red finish for identification of dedicated circuits</p>
10	772 42	 2 X 2P+E at an angle of 45°
10	772 43	 3 X 2P+E at an angle of 45°
	<div style="text-align: center;">  White </div>	<p>Cat. 6 FTP - RJ 45 sockets FTP - 9-pin, 2 RJ 45, equipped with the Soluclip accessory 3-gang</p>
5	771 90	
	<div style="text-align: center;">  White </div>	<p>Cat. 5e FTP - RJ 45 sockets FTP - 9-pin, 2 RJ 45, equipped with the Soluclip accessory 3-gang</p>
5	771 80	
	<div style="text-align: center;">  White </div>	<p>Quick tap-off accessory</p>
10	771 06	 For quick, simple tap-off between 2 socket blocks for trunking Fitted with a cover
	<div style="text-align: center;">  White </div>	<p>Soluclip accessory Offers features such as anti-slip, anti-pullout, perfect cover finish, IP 40</p>
10	756 90	 For installation with any Snap-on function

snap-on trunking - 45 mm cover


50 x 80 and 50 x 105

routing sections and accessories

Cat.Nos for trunking 50 x 80

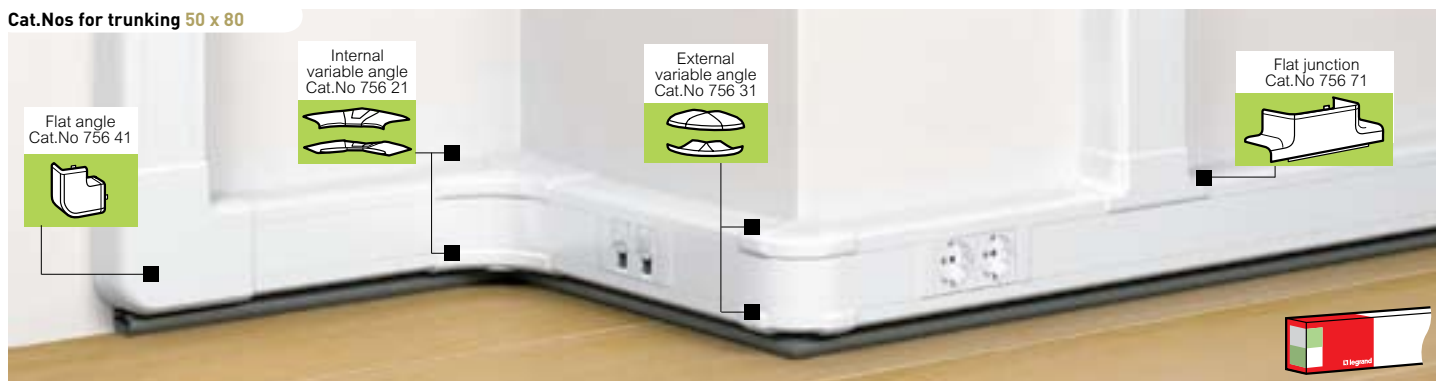


Cat.Nos for trunking 50 x 105

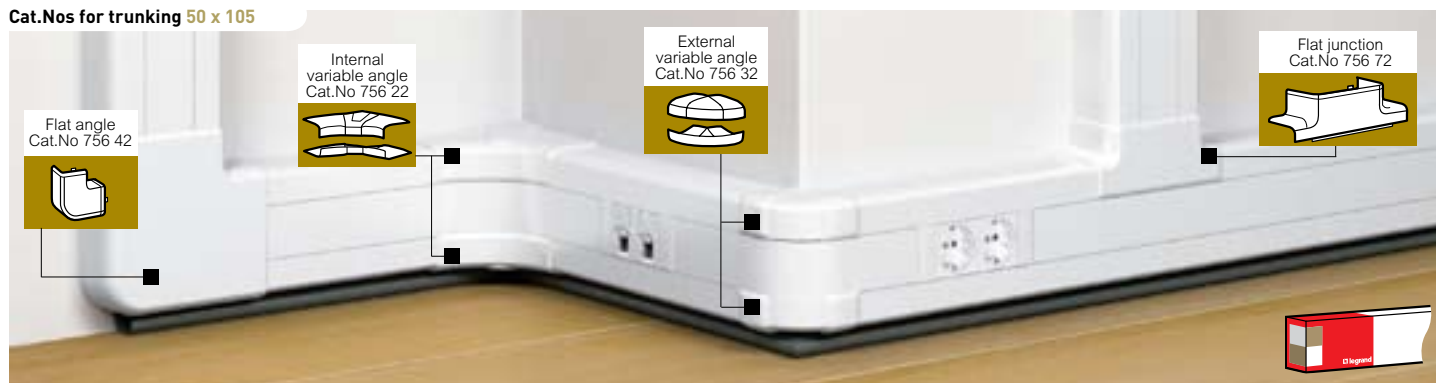

Selection chart (p. 818)
Capacity chart, selection chart for junctions (p. 822)

Pack	Cat.Nos	Snap-on trunking
20 ⁽¹⁾ 12 ⁽¹⁾	50 x 80 756 01 50 x 105 756 02	1-compartment trunking Snap-on trunking Can take any Mosaic or Arteor wiring accessory Includes: - 1 body - 1 cover, width 45 mm Length 2 m
20 ⁽¹⁾	756 08	Extra cover Width 45 mm Length 2 m
26 ⁽¹⁾	756 09	Extra partition Divider Length 2 m
10	50 x 80 756 61 50 x 105 756 62	Fishplate body joint Used to join 2 bodies and simplifies fixing sections to the wall - set of 2
20	756 66 756 67	Joint Stick-on body joint
10	756 69	Cover joint Cover joint, width 45 mm
24 ⁽¹⁾	105 80	Height spacer Length 2 m, colour charcoal grey For fitting 15 mm from the ground
10	756 90	Soluclip accessory For installation with any Mosaic or Arteor function



Pack	Cat.Nos	Angles
10	50 x 80 756 21 50 x 105 756 22	Internal angle, varies from 80° to 100°
10	756 31 756 32	External angle, varies from 85° to 120°
10	756 41 756 42	Flat angle at 90°
10	50 x 80 756 11 50 x 105 756 12	End caps Left or right end cap
5	50 x 80 756 71 50 x 105 756 72	Flat junctions With 80 mm wide sections Creates a junction with snap-on trunking 50 x 80 mm
5	50 x 105 756 76	With 105 mm wide sections Creates a junction with snap-on trunking 50 x 105 mm
5	756 81	Angled junction Creates a junction in an internal angle with snap-on trunking 50 x 80 mm, 50 x 105 mm, 50 x 130 mm Must be used in conjunction with internal angle
5	756 88	Junction with floor duct Creates a junction with a floor duct size 50 x 12 mm or 92 x 20 mm



These products are part of solutions for office equipment > See p. 772-773

(1) Number of metres in pack


Red catalogue numbers: New products

snap-on trunking - 45 mm cover


50 x 130 and 50 x 145

routing sections and accessories

Cat.Nos for trunking 50 x 130

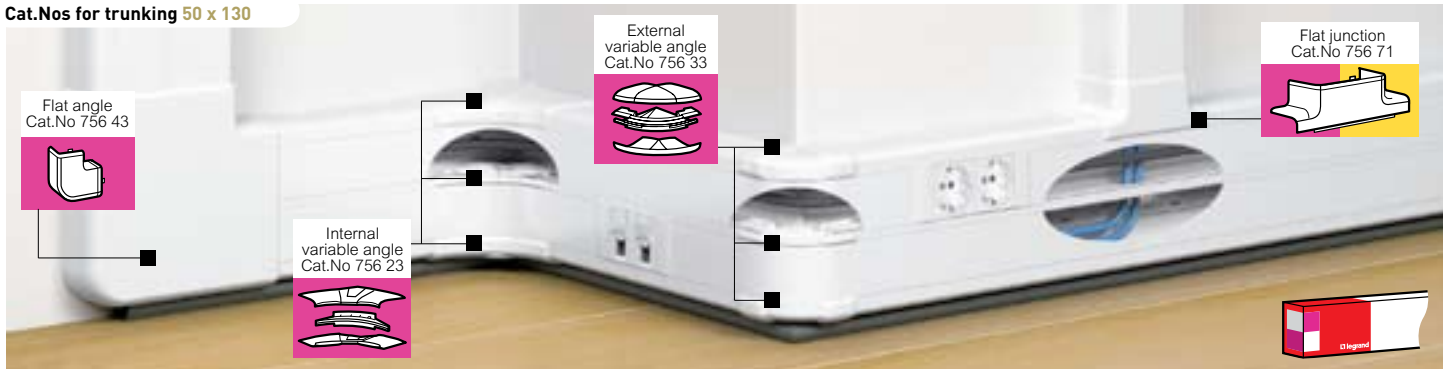


Cat.Nos for trunking 50 x 145

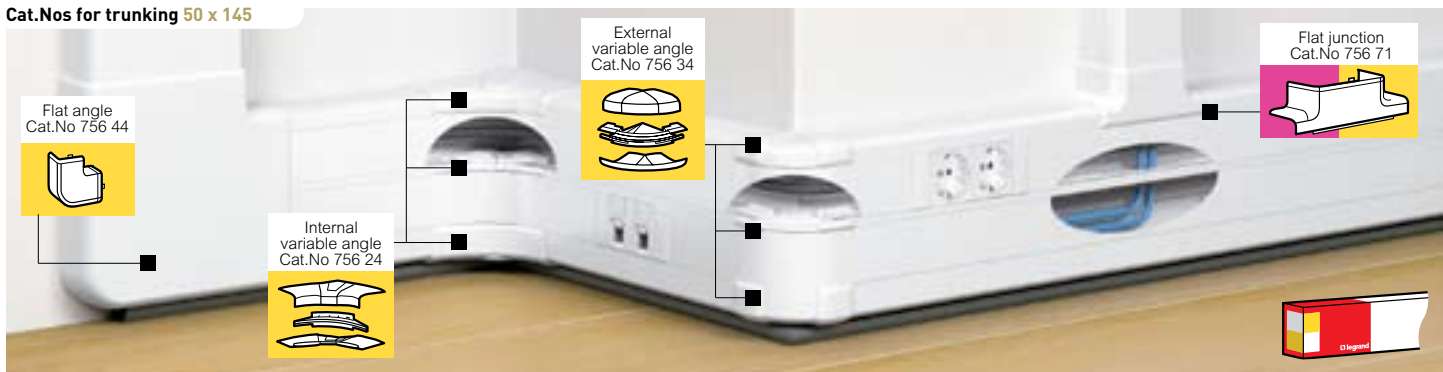

Selection chart (p. 818)
Capacity chart, selection chart for junctions (p. 822)

Pack	Cat.Nos	2-compartment trunking
12 ⁽¹⁾ 8 ⁽¹⁾	50 x 130 756 03	50 x 145 756 04
20 ⁽¹⁾	756 08	Extra cover Width 45 mm Length 2 m
26 ⁽¹⁾	756 09	Extra partition Divider Length 2 m
10	50 x 130 756 61	50 x 145 756 63
20	756 66	Fishplate body joint Used to join 2 bodies and simplifies fixing sections to the wall - set of 2
20	50 x 145 756 67	Stick-on body joint For top part of body
20	756 67	Stick-on body joint For bottom part of body
10	756 69	Cover joint Cover joint, width 45 mm
24 ⁽¹⁾	105 80	Height spacer Length 2 m, colour charcoal grey For fitting 15 mm from the ground
10	756 90	Soluclip accessory For installation with any Mosaic or Arteor function




Pack	Cat.Nos	Angles
5	50 x 130 756 23	50 x 145 756 24
5	756 33	756 34
5	756 43	756 44
5	50 x 130 756 13	50 x 145 756 14
5	50 x 130 756 71	50 x 145 756 72
5	756 71	756 71
5	756 75	756 76
5	756 75	756 75
5	756 81	Angled junction Creates a junction in an internal angle with snap-on trunking 50 x 80 mm, 50 x 105 mm, 50 x 130 mm. Must be used in conjunction with internal angle
5	756 88	Junction with floor duct Creates a junction with a floor duct size 50 x 12 mm or 92 x 20 mm

(1) Number of metres in pack

snap-on trunking 45 mm cover 50 x 180

routing sections and accessories

Cat.Nos for trunking 50 x 180

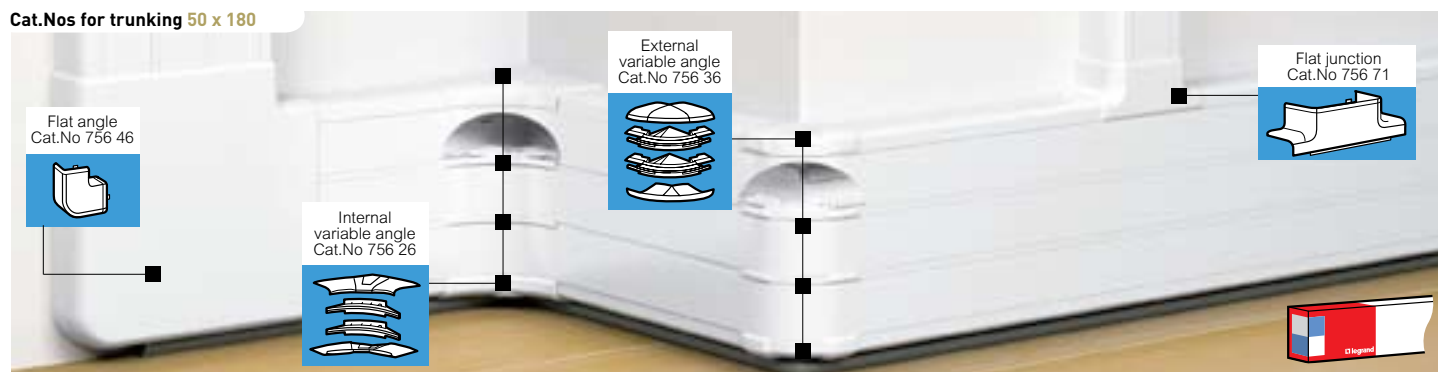

Example of installation:
One current type per compartment




Example of installation:
Wiring accessories in central compartment and distribution in side compartments



Selection chart (p. 818)
Capacity chart, selection chart for junctions (p. 822)

Pack	Cat.Nos	Snap-on trunking
8 ⁽¹⁾	50 x 180 756 06	3-compartment trunking Snap-on trunking Can take any Mosaic or Arteor wiring accessory Includes: - 1 body with 3 compartments - 3 flexible covers, width 45 mm Length 2 m
20 ⁽¹⁾	756 08	Extra cover Width 45 mm Length 2 m
26 ⁽¹⁾	756 09	Extra partition Divider Length 2 m
10	756 61	Fishplate body joint Used to join 2 bodies and simplifies fixing sections to the wall - set of 2
20	756 66	Stick-on body joints For top part of body
10 ⁽¹⁾	756 69	Cover joint Cover joint, width 45 mm
24	105 80	Height spacer Length 2 m, colour charcoal grey For fitting 15 mm from the ground
10	756 90	Soluclip accessory For installation with any Mosaic or Arteor function



Pack	Cat.Nos	Angles
5	50 x 180 756 26	Internal angle, varies from 80° to 100°
5	756 36	External angle, varies from 85° to 120°
5	756 46	Flat angle at 90°
5	756 16	End cap Left or right end cap
5	756 71	Flat junctions With 80 mm wide sections Creates a junction with snap-on trunking 50 x 80 mm
5	756 75	With 105 mm wide sections Creates a junction with snap-on trunking 50 x 105 mm
5	756 81	Angled junction Creates a junction in an internal angle with snap-on trunking 50 x 80 mm, 50 x 105 mm, 50 x 130 mm Must be used in conjunction with internal angle
5	756 88	Junction with floor duct Creates a junction with a floor duct size 50 x 12 mm or 92 x 20 mm

■ New standard EN 50085-2-1

Standard EN 50085-2-1 concerns electrical trunking systems for installation on walls or on the ceiling

This new system standard proposes a tiered classification which allows performance to be adapted to the target applications















To satisfy the requirements of NF C 15-100, Legrand has conformed to the current specifications of NF C 68-104 in terms of both performance and level of functions provided by the system

To this end, our installation trunking (which carries electrical wiring accessories) is type 3 (installation) in the new standard

Classification of snap-on trunking

New standard EN 50085-2-1		Level
6.1	Void	
6.2	Resistance to impact for installation and application	2.0 J
6.3	Minimum storage and transport temperature	- 25 °C
6.3	Minimum installation and application temperature	- 5 °C
6.3	Maximum application temperature	+ 60 °C
6.4	Resistance to flame propagation	Non-flame propagating
6.5	Electrical continuity characteristic	without electrical continuity characteristic
6.6	Electrical insulating characteristic	with electrical insulating characteristic
6.7	Degrees of protection provided by enclosure	IP 40
6.9	The system access cover retention	With a tool
6.101	The position when surface mounted	Wall fixed Ceiling fixed Wall fixed and supported by the floor or other horizontal surface
6.102	Prevention of contact between liquids and insulated conductors and live parts in case of CTS/CDS mounted in a skirting position and wet-treatment of floor	Instructions restricting the installation position
6.103	The functions provided	Type 3 (installation)
Rated current		500 V
Against mechanical shocks		IK 07

Composition and functions for snap-on trunking

Cross-section (mm)	Number of compartments	Cover	Monobloc: body + cover	 Stick-on body joint	 Dividier ⁽²⁾	 End-cap ⁽²⁾	 Internal angle ⁽¹⁾	 External angle ⁽¹⁾	 Flat angle ⁽¹⁾	 Cover joint ⁽²⁾	 Flat junction ⁽²⁾		Cross-section (mm ²)
50 x 80  Cat.No 756 01	1 compartment	1 x 45	756 01	756 61	756 09	756 11	756 21	756 31	756 41	756 69	756 71	(3)	2934
50 x 105  Cat.No 756 02	1 compartment	1 x 45	756 02	756 62	756 09	756 12	756 22	756 32	756 42	756 69	756 72/76	(3)	4098
50 x 130  Cat.No 756 03	2 compartments	2 x 45	756 03	756 61	756 09	756 13	756 23	756 33	756 43	756 69	756 71/75	(3)	2442/2442
50 x 145  Cat.No 756 04	2 compartments	2 x 45	756 04	756 63	756 09	756 14	756 24	756 34	756 44	756 69	756 71/72/75/76	(3)	2442/3024
50 x 180  Cat.No 756 06	3 compartments	3 x 45	756 06	756 61	756 09	756 16	756 26	756 36	756 46	756 69	756 71/75	(3)	2442/1950/2442

(1) Classification and performance are for a mounting at an angle of 90°

(2) See mounting and assembling instructions on technical sheets, boxes, or on www.legrand.fr

(3) Wiring accessories : Mosaic sockets : Cat.Nos 772 02/03/22/23

■ Wiring capacity

Dimensions	Number of compartments	Cover width	Cross-section	Capacity	Ømax.	1.5 mm ²	2.5 mm ²	4 mm ²	6 mm ²	3 x 1.5 mm ²	3 x 2.5 mm ²	UTP & FTP Cat.6
50 x 80 Cat.No 756 01	1 compartment	45	2934	Max.	38	177	131	115	85	26	19	58
			1564	with sockets for trunking		94	70	61	45	13	10	31
			1604	with LEXIC support		97	72	63	46	14	10	32
50 x 105 Cat.No 756 02	1 compartment	45	4098	Max.	38	248	184	161	119	36	26	81
			2728	with sockets for trunking		165	122	107	79	24	17	54
			2768	with LEXIC support		167	124	109	80	24	18	55
50 x 130 Cat.No 756 03	2 compartments	45	2442	Max.	38	148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22
		45	2442	Max.		148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22
50 x 145 Cat.No 756 04	2 compartments	45	2442	Max.	38	148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22
		45	3024	Max.	38	183	135	119	88	26	19	60
			1654	with sockets for trunking		100	74	65	48	14	10	33
			1694	with LEXIC support		102	76	66	49	15	11	33
50 x 180 Cat.No 756 06	3 compartments	45	2442	Max.	38	148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22
		45	1950	Max.	38	118	87	76	56	17	12	38
			580	with sockets for trunking		35	26	22	16	5	3	11
			620	with LEXIC support		37	27	24	18	5	4	12
		45	2442	Max.	38	148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22

■ Choice and installation of junctions

Dimensions	Horizontal trunking	Vertical trunking	Flat junctions	Angled junctions	Flat junctions	Angled junctions	Angled junctions
			50 x 80 mm Cat.No 756 01		50 x 105 mm Cat.No 756 02		50 x 130 mm Cat.No 756 03
50 x 80 mm Cat.No 756 01	1 compartment		756 71	756 81 + 756 21	-	756 81 + 756 21	756 81 + 756 21
50 x 105 mm Cat.No 756 02	1 compartment		756 72	-	756 76	756 81 + 756 22	756 81 + 756 22
50 x 130 mm Cat.No 756 03	2 compartments		756 71	756 81 + 756 23	756 75	756 81 + 756 23	756 81 + 756 23
50 x 145 mm Cat.No 756 04	2 compartments		756 71 (upward) 756 72 (downward)	756 81 + 756 24	756 75 (upward) 756 76 (downward)	756 81 + 756 24	756 81 + 756 24
50 x 180 mm Cat.No 756 06	3 compartments		756 71	756 81 + 756 26	756 75	756 81 + 756 26	756 81 + 756 26

fully assembled DLP trunking

bodies, finishing accessories and mounting wiring accessories

White
length: 2 m

TRUNKING			TRUNKING AND ACCESSORIES							Internal angle ⁽²⁾ 85 to 95°
Number of compartments	Covers width (mm)	Dimensions (mm)	Body and covers complete	Separation	Clips	Base joints ⁽¹⁾	Cover joints	End cap		
1	65	50 x 80	104 62	105 82	106 81	106 92 ou 106 91	108 01	107 22	106 02	
	65	50 x 105	104 24	105 82	106 81	106 96	108 01	107 00	106 05	
2	65 65	50 x 150	104 27	105 82	106 81	106 92 ou 106 91	2 x 108 01	107 03	106 06	
3	40 65 40	50 x 170	104 67	105 82	106 82	106 92 ou 106 91	2 x 108 00 + 108 01	107 10	106 50	

(1) 106 92: base joint for aligning bases, 106 91: base joint, attached with adhesive (2) Internal and external angles include partition junction(s) for installation with multi-compartment trunking
(3) Flat junctions Cat.Nos 107 37 and 107 40 are suitable for tap-off to a 105 mm wide profile equipped with a 65 mm cover and flat junctions Cat.No 107 36 and 107 38 are suitable for tap-off to a 105 mm wide profile equipped with a 85 mm cover.

adaptable DLP trunking

bodies, finishing accessories and mounting wiring accessories

White
length: 2 m

TRUNKING			BODIES, COVERS, PARTITIONS AND ACCESSORIES							
Number of compartments	Cover(s) width (mm)	Dimensions (mm)	Bodies	Covers	Division partitions	Separation partitions	Clips	Body joints ⁽¹⁾	Cover joints	End cap
1	65	35 x 80	104 11	105 21	-	105 84	106 81	106 92 or 106 91	108 01	107 22
	85	35 x 105	104 21	105 22	-	105 82	106 82	106 92 or 106 91	108 02	107 01
	65	50 x 80	104 12	105 21	-	105 82	106 81	106 92 or 106 91	108 01	107 22
	85	50 x 105	104 22	105 22	-	105 82	106 82	106 92 or 106 91	108 02	107 02
	85	65 x 105	104 23	105 22	-	105 83	106 82	106 92 or 106 91	108 02	107 04
	130	50 x 150	104 32	105 24	-	105 82	106 86	106 92 or 106 91	108 04	107 03
	130	65 x 150	104 33	105 24	-	105 83	106 86	106 92 or 106 91	108 04	107 06
	180	50 x 195	104 52	105 26	-	105 82	106 86	106 92 or 106 91	108 06	107 07
	180	65 x 195	104 53	105 26	-	105 83	106 86	106 92 or 106 91	108 06	107 07
2	65 65	65 x 150	104 33	2 x 105 21	104 73	105 83	106 81	106 92 or 106 91	2 x 108 01	107 06
	85 85	50 x 195	104 52	2 x 105 22	104 72	105 82	106 82	106 92 or 106 91	2 x 108 02	107 07
	85 85	65 x 195	104 53	2 x 105 22	104 73	105 83	106 82	106 92 or 106 91	2 x 108 02	107 07
	65 130	65 x 220	104 59	105 24 + 105 21	104 73	105 83	106 81 + 106 86	106 92 or 106 91	108 04 + 108 01	107 08

(1) 106 92: base joint for aligning bases, 106 91: base joint, attached with adhesive (2) Internal and external angles include partition junction(s) for installation with multi-compartment trunking
(3) Flat junctions Cat.Nos 107 37 and 107 40 are suitable for tap-off to a 105 mm wide profile equipped with a 65 mm cover and flat junctions Cat.No 107 36 and 107 38 are suitable for tap-off to a 105 mm wide profile equipped with a 85 mm cover.

fully assembled DLP trunking

mounting of wiring accessories

ANGLES		FLAT JUNCTION ⁽³⁾		Angled junction
External angle ⁽²⁾ 60 to 120°	Flat angle	To width 80 mm	To width 105 mm	
106 22	107 67	107 35	-	107 63 + 106 02
106 19	107 86	107 39	107 40	107 65 + 106 05
106 35	107 89	107 35	107 36 ou 107 37	107 63 + 106 06
106 38	107 98	107 35	107 36 ou 107 37	107 63 + 106 50

BENDS			FLAT JUNCTION ⁽³⁾		Angled junction
Internal bend ⁽²⁾ 85 to 95°	External bend ⁽²⁾ 60 to 120°	Flat angle	To width 80 mm	To width 105 mm	
106 01	106 21	107 67	107 35	-	107 63 + 106 01
106 01	106 21	107 84	107 35	107 36	107 63 + 106 01
106 02	106 22	107 67	107 35	-	107 63 + 106 01
106 02	106 22	107 85	107 35	107 36 + 107 37	107 63 + 106 02
106 03	106 23	107 87	107 33	107 38	107 64 + 106 03
106 02	106 22	107 89	107 35	107 36 + 107 37	107 63 + 107 02
106 03	106 23	107 90	107 33	107 38	107 64 + 106 03
106 02	106 22	107 92	107 35	107 36 + 107 37	107 63 + 106 02
106 03	106 23	107 93	107 33	107 38	107 64 + 106 03
106 07	106 36	107 90	107 33	107 38	107 64 + 106 07
106 06	106 35	107 92	107 35	107 36 + 107 37	107 63 + 106 06
106 07	106 36	107 93	107 33	107 38	107 64 + 106 07
106 07	106 36	107 96	107 33	107 38	107 64 + 106 07

	Cover width	
	65 mm	85 mm
	Cat.Nos	Cat.Nos

MOSAIC SUPPORTS ⁽¹⁾			
2 modules		109 52	109 92
4 modules		109 54	109 94
6 modules		109 56	109 96
8 modules		109 58	109 98

MOSAIC SOCKETS OUTLETS - AUTOMATIC TERMINALS GERMAN STANDARD

		Standard	Red	Tamperproof
2P+E, 2 modules		774 01	-	774 21
2 x 2P+E, 4 modules		774 02	774 12	774 22
3 x 2P+E, 6 modules		774 03	774 13	774 23
4 x 2P+E, 8 modules		774 04	-	774 24

MOSAIC SOCKETS OUTLETS - SCREW TERMINALS GERMAN STANDARD

		Standard	Red	Tamperproof
2P+E, 2 modules		776 01	-	776 21
2 x 2P+E, 4 modules		776 02	776 12	776 22
3 x 2P+E, 6 modules		776 03	776 13	776 23
4 x 2P+E, 8 modules		776 04	-	776 24

UNIVERSAL SUPPORTS ⁽²⁾		
		Cover width
		85 mm
1 gang		109 13
2 gang		109 23
3 gang		109 33


(1) Supplied with finishing plate

(2) Supplied with the socket and its support and finishing plate

fully assembled DLP trunking 50 x 80


trunking and fittings

Cat.Nos for 50 x 80 trunking

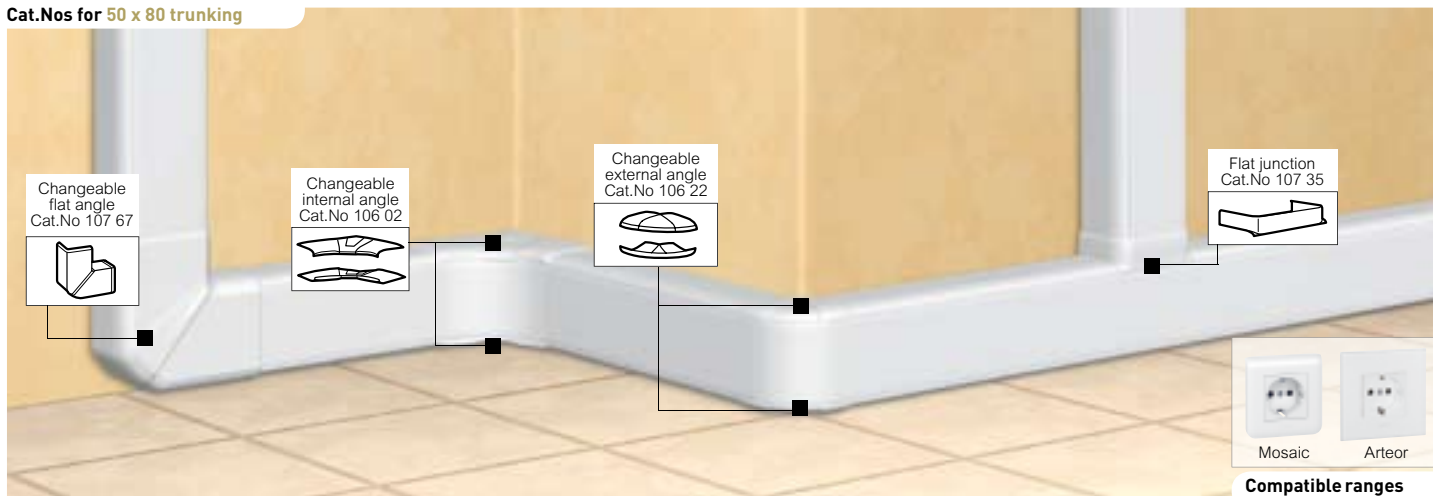

Selection chart (p. 825)
Wiring capacity chart (p. 839)

Pack	Cat.Nos	Fully assembled trunking
20	104 62 ⁽¹⁾	Trunking without partition Supplied with: – one 50 x 80 mm body – one flexible cover 65 mm wide Fits onto the whole trunking including in internal and external angles Installation: can be used with ranges: Mosaic, Arteor or Lexic Length 2 m
24	105 82 ⁽¹⁾	Partition Separation partition Length 2 m
20	106 91	Joints Body joint For aligning bases during installation
20	106 92	Body joint, attached with adhesive (fit at the end of installation)
10	108 01	Cover joint for 65 mm cover



Pack	Cat.Nos	Junctions
5	107 35	Flat junction For tap-off to a 80 mm wide branch
5	107 63	Angled junction For tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80, 50 x 105 For use with internal angles Cat.No 106 02

Pack	Cat.Nos	Accessories
50	106 81	Clip
100	308 81	Base for clamp

Installation accessories (p. 836-838)


Pack	Cat.Nos	Angles and end cap
10	106 02	Internal and external bends Include the 2 components for the top and bottom of the trunking on which the flexible cover is fitted Changeable internal bend, from 85° to 95° for 50 x 80/50 x 105/50 x 150 and 50 x 195 mm trunkings
10	106 22	Changeable external bend, from 60° to 120° for 50 x 80/50 x 105/50 x 150 and 50 x 195 mm trunkings
10	107 67	Flat angle 90° flat angle
10	107 22	End cap Left or right end cap

White
length: 2 m

fully assembled DLP trunking 50 x 105


trunking and fittings

Cat.Nos for 50 x 105 trunking

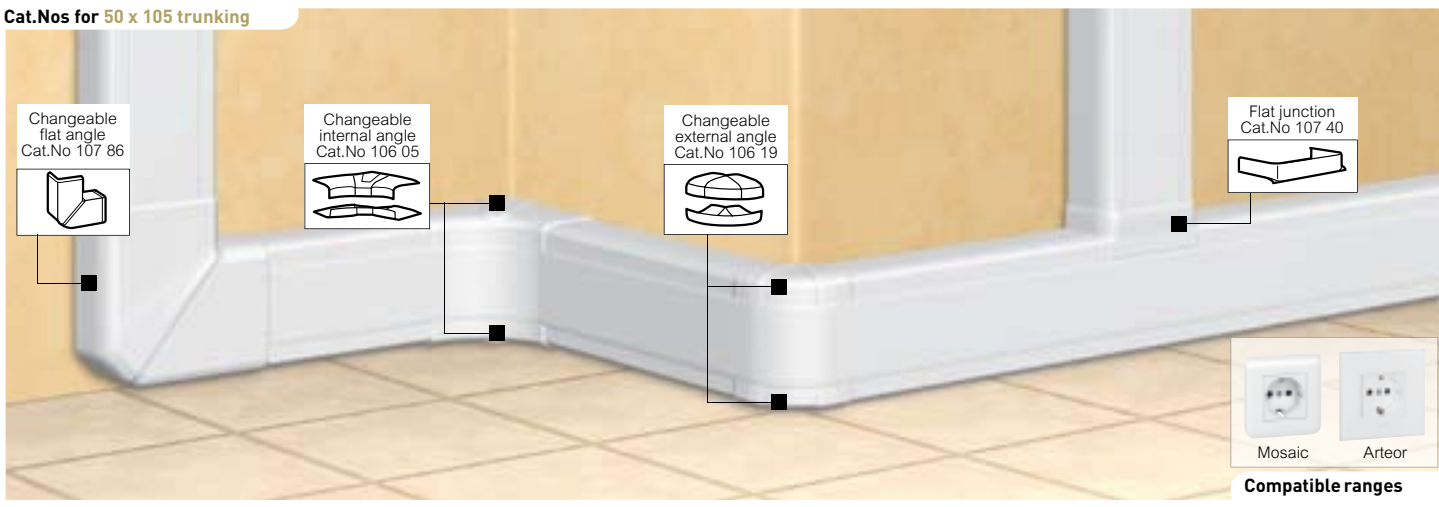

Selection chart (p. 825)
Wiring capacity chart (p. 839)

Pack	Cat.Nos	Fully assembled trunking
12	104 24 ⁽¹⁾	Trunking without partition Supplied with: – one 50 x 105 mm body – one flexible cover 65 mm wide Fits onto the whole trunking including in internal and external angles Installation: can be used with ranges: Mosaic, Arteor or Lexic Length 2 m
24	105 82 ⁽¹⁾	Partition Separation partition Length 2 m
20	106 96	Joints Body joint For aligning bases during installation
10	108 01	Cover joint for 65 mm cover



Pack	Cat.Nos	Junctions
5	107 39	Flat junctions For tap-off to a 80 mm wide branch
5	107 40	For tap-off to a 105 mm wide branch
5	107 65	Angled junction For tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80 and 50 x 105 For use with internal angle Cat.No 106 05
50	106 81	Accessories Clip
100	308 81	Base for clamp

Pack	Cat.Nos	Angles and end cap
10	106 05	Internal and external bends Include the 2 components for the top and bottom of the trunking on which the flexible cover is fitted Changeable internal bend, from 85° to 95° for 50 x 105 mm trunkings
10	106 19	Changeable external bend, from 60° to 120° for 50 x 105 mm trunkings
10	107 86	Flat angle 90° flat angle
20	107 00	End cap Left or right end cap

Installation accessories (p. 836-838)

These products are part of solutions for office equipment > See p. 772-773


(1) Number of metres in pack

White
length: 2 m

fully assembled DLP trunking 50 x 150

trunking and fittings

Cat.Nos for 50 x 150 trunking

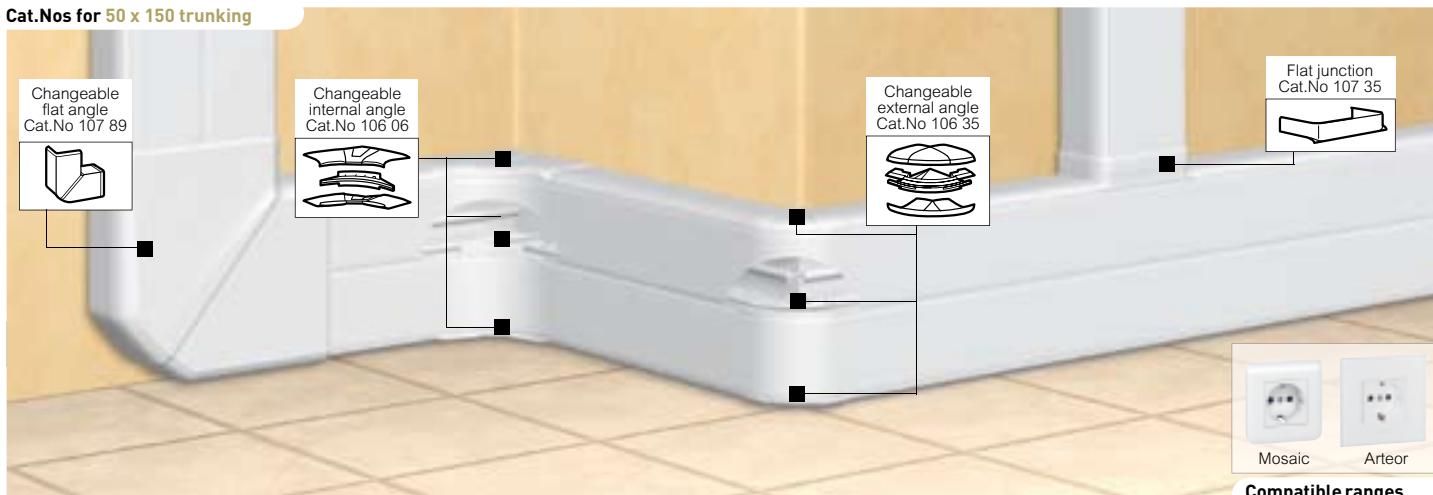


Compatible ranges

Selection chart (p. 825)
Wiring capacity chart (p. 839)

Pack Cat.Nos Fully assembled trunking

Pack	Cat.Nos	Description
12	104 27 ⁽¹⁾	Trunking with partition Supplied with: - one 50 x 150 mm body - two flexible cover 65 mm wide Fits onto the whole trunking including in internal and external angles Installation: can be used with ranges: Mosaic, Arteur or Lexic Length 2 m
24	105 82 ⁽¹⁾	Partition Separation partition Length 2 m
20	106 91	Joints Body joint For aligning bases during installation
20	106 92	Body joint, attached with adhesive (fit at the end of installation)
10	108 01	Cover joint for 65 mm cover



Pack Cat.Nos Junctions

Pack	Cat.Nos	Description
5	107 35	Flat junctions For tap-off to a 80 mm wide branch
5	107 37	For tap-off to a 105 mm wide branch equipped with a 65 mm cover
5	107 36	For tap-off to a 105 mm wide branch equipped with a 85 mm cover
5	107 63	Angled junction For tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80, 50 x 105 For use with internal angle Cat.No 106 06
50	106 81	Accessories Clip
100	308 81	Base for clamp

Angles and end cap

Pack	Cat.Nos	Description
5	106 06	Internal and external bends Include the 3 components making the angle (parts for the top and bottom and the partition junction) on which the flexible cover is fitted Changeable internal bend, from 85° to 95° for 50 x 150 and 50 x 195 mm trunkings
5	106 35	Changeable external bend, from 60° to 120° for 50 x 150 and 50 x 195 mm trunkings
5	107 89	Flat angle 90° flat angle
10	107 03	End cap Left or right end cap


Installation accessories (p. 836-838)

fully assembled DLP trunking 50 x 170

trunking and fittings


White
length: 2 m

Cat.Nos for 50 x 170 trunking

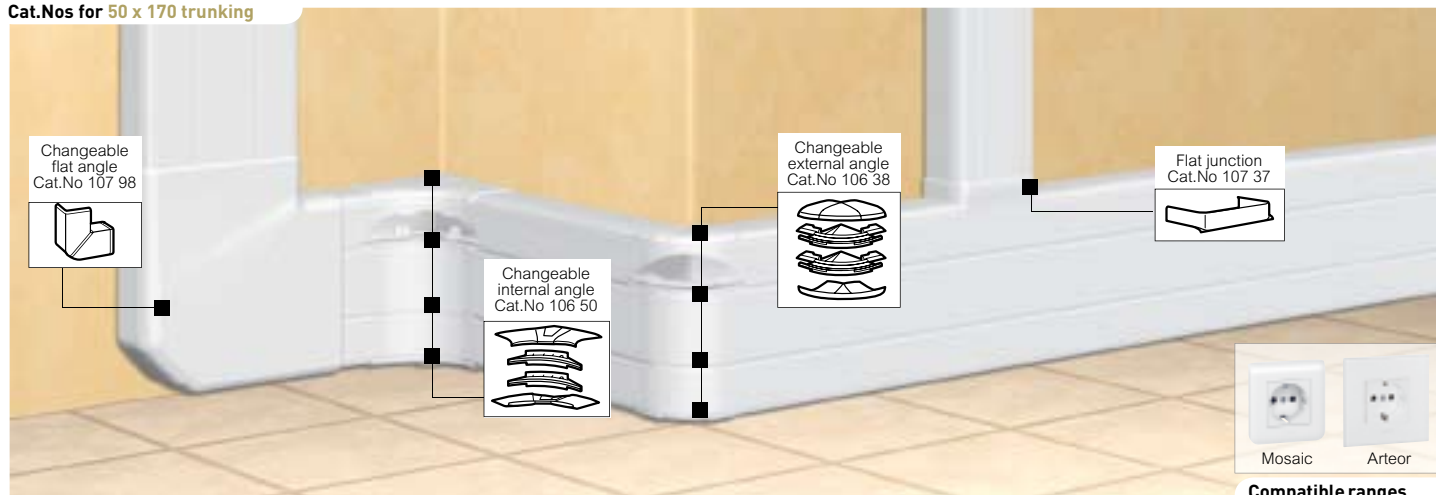

Selection chart (p. 825)
Wiring capacity chart (p. 839)

Pack	Cat.Nos	Fully assembled trunking
4	104 67 ⁽¹⁾	Trunking with partition Supplied with: – one 50 x 170 mm body – one flexible cover 65 mm and two flexible covers 40 mm Fits onto the whole trunking including internal and external angles. Installation: can be used with ranges: Mosaic, Arteur or Lexic Length 2 m
24	105 82 ⁽¹⁾	Partition Separation partition Length 2 m
20	106 91	Joints Body joint For aligning bases during installation
20	106 92	Body joint, attached with adhesive (fit at the end of installation)
10	108 01	Cover joint for 65 mm cover
10	108 00	Cover joint for 40 mm cover




Pack	Cat.Nos	Junctions
5	107 35	Flat junctions For tap-off to a 80 mm wide profile
5	107 37	For tap-off to a 105 mm wide profile equipped with a 65 mm cover
5	107 36	For tap-off to a 105 mm wide profile equipped with a 85 mm cover
5	107 63	Angled junction For tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80, 50 x 105 For use with internal angle Cat.No 106 50
50	106 82	Accessories Clip for 40, 65 and 85 mm covers
100	308 81	Base for clamp

Pack	Cat.Nos	Angles and end cap
5	106 50	Internal and external bends Include the 4 components making the angle (parts for the top and bottom and the 2 partition junctions) on which the flexible cover is fitted Changeable internal bend, from 85° to 95° for 50 x 170 and 50 x 195 mm trunkings
5	106 38	Changeable external bend, from 60° to 120° for 50 x 170 and 50 x 195 mm trunkings
2	107 98	Flat angle 90° flat angle
5	107 10	End cap Left or right end cap

Installation accessories (p. 836-838)


adaptable DLP trunking 35 x 80 and 50 x 80
trunking and fittings

Cat.Nos for 35 x 80 trunking

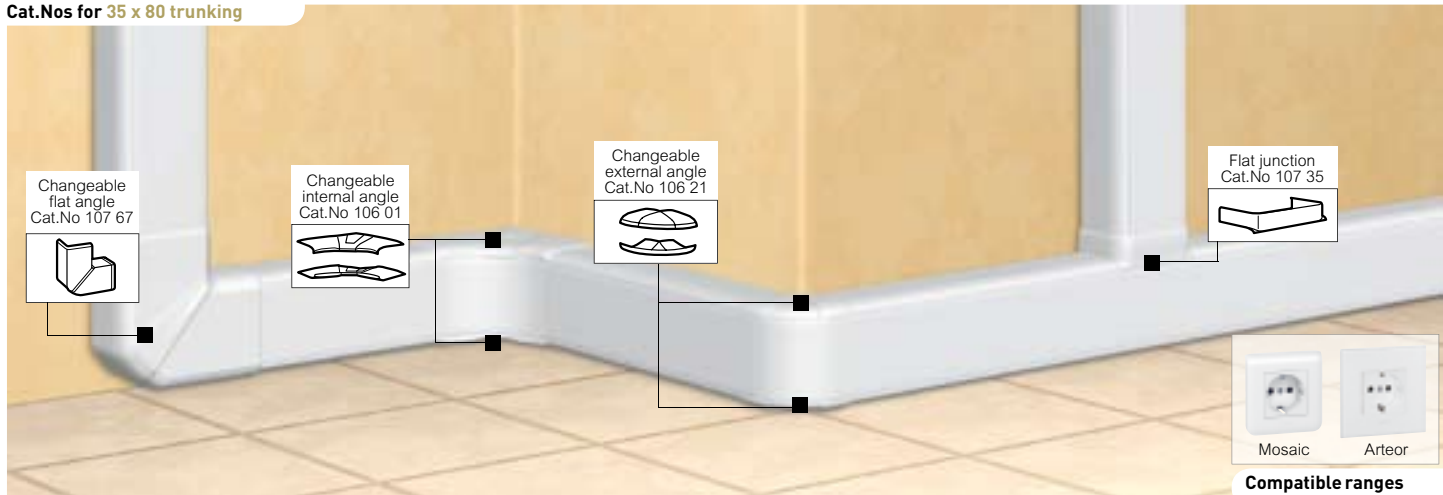

Selection chart (p. 825)
Wiring capacity chart (p. 839)

Pack	Cat.Nos	Trunking
		Suitable for a wide range of requirements and applications: - Distribution: large wiring capacity and wide access to the wiring space - Installation: can be used with ranges: Mosaic, Arteor or Lexic
		Bodies Supplied without cover Length 2 m
20	104 11 ⁽¹⁾	35 x 80 mm
20	104 12 ⁽¹⁾	50 x 80 mm
20	105 21 ⁽¹⁾	Flexible cover Fits onto the whole trunking including in internal or external angles Full cover width 65 mm Length 2 m
16	105 84 ⁽¹⁾	Partitions Length 2 m Self-adhesive separation junction for 35 x 80 trunking
24	105 82 ⁽¹⁾	Separationpartition for 50 x 80 trunking
20	106 91	Joints Body joint, for aligning bases during installation
20	106 92	Body joint, attached with adhesive (fit at the end of installation)
10	108 01	Cover joint



Pack	Cat.Nos	Angles and end caps (continued)
10	107 67	Flatangle 90° flat angle
10	107 22	End cap Left or right end cap
5	107 35	Junctions Flat junction For tap-off to an 80 mm wide branch
5	107 63	Angled junction For tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80 or 50 x 105 mm for trunking Cat.No 104 12 Used with an internal angle Cat.No 106 01 or 106 02
50	106 81	Accessories Clip
100	308 81	Base for clamp for trunking Cat.No 104 12

Pack	Cat.Nos	Angles and end caps
10	106 01	Internal and external bends Include the 2 components for the top and bottom of the trunking on which the flexible cover is fitted Changeable internal bend, from 85° to 95° for 35 x 80 and 35 x 105 mm trunking
10	106 02	Changeable external bend, from 85° to 95° for 50 x 80/50 x 105/50 x 150 and 50 x 195 mm trunkings
10	106 21	Changeable external bend, from 60° to 120° for 35 x 80 and 35 x 105 mm trunking
10	106 22	Changeable external bend, 50 x 105 from 60° to 120° for 50 x 80/50 x 150/ and 50 x 195 mm trunkings


Legrand System These products are part of solutions for office equipment > See p. 772-773

(1) Number of metres in pack

adaptable DLP trunking 35 x 105, 50 x 105 and 65 x 105

trunking and fittings

Cat.Nos for 35 x 105 trunking

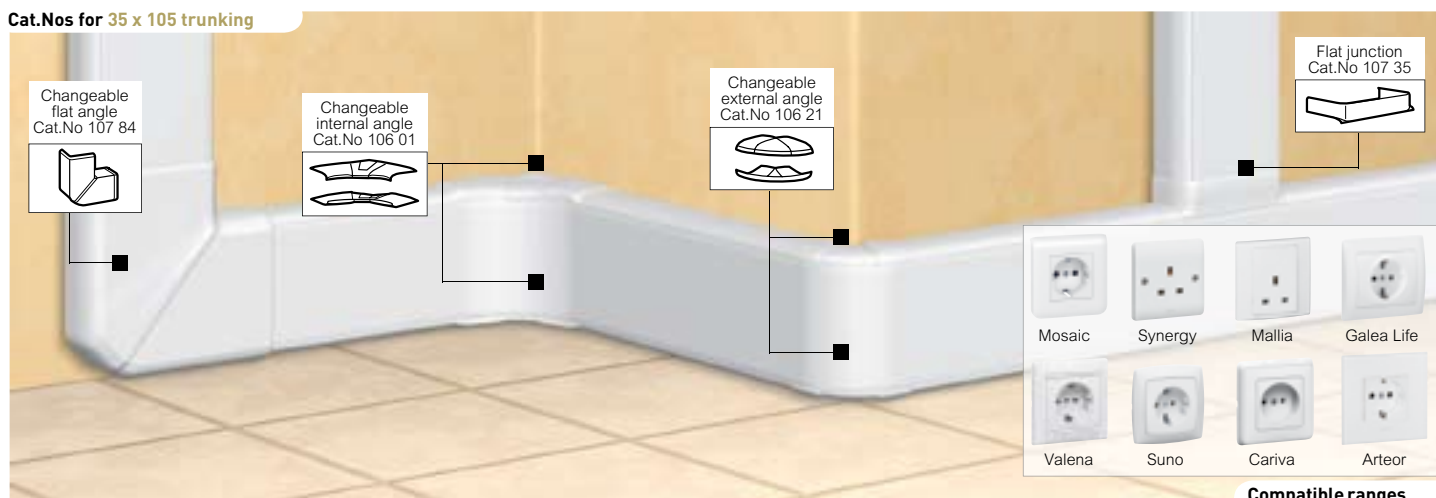

Selection chart (p. 825)
Wiring capacity chart (p. 839)

Pack	Cat.Nos	Trunking	Pack	Cat.Nos	Angles (continued)
		<p>Suitable for a wide range of requirements and applications:</p> <ul style="list-style-type: none"> - Distribution: large wiring capacity and wide access to the wiring space - Installation: can be used with ranges: Mosaic, Arteor, Lexic... <p>Bodies Supplied without cover Length 2 m</p> <p>White</p> <p>20 104 21⁽¹⁾ 35 x 105 mm</p> <p>20 104 22⁽¹⁾ 50 x 105 mm</p> <p>16 104 23⁽¹⁾ 65 x 105 mm</p> <p>Flexible cover Fits onto the whole trunking including in internal or external angles Full cover width 85 mm Length 2 m</p> <p>Partitions 24 105 82⁽¹⁾ Separation partition for 35 and 50 mm depths length 2 m</p> <p>48 105 83⁽¹⁾ Separation partition for 65 mm depth length 2 m</p> <p>Joints 20 106 91 Body joint For aligning bases during installation</p> <p>20 106 92 Body joint, attached with adhesive (fit at the end of installation)</p> <p>10 108 02 Cover joint</p>	<p>10 106 21 Changeable external bend from 60° to 120° for 35 x 80 and 35 x 105 mm trunking</p> <p>10 106 22 Changeable external angle from 60° to 120° for 50 x 80/50 x 105/50 x 150 and 50 x 195 mm trunking</p> <p>10 106 23 Changeable external bend from 60° to 120° for 65 x 105/65 x 150 and 65 x 195 mm trunking</p> <p>Flat angle 90° angles</p> <p>10 107 84 For 35 x 105 mm trunking</p> <p>10 107 85 For 50 x 105 mm trunking</p> <p>10 107 87 For 65 x 105 mm trunking</p>		
		<p>Internal and external bends Include the 2 components for the top and bottom of the trunking on which the flexible cover is fitted</p> <p>10 106 01 Changeable internal bend from 85° to 95° for 35 x 80 and 35 x 105 mm trunking</p> <p>10 106 02 Changeable internal bend from 85° to 95° for 50 x 80/50 x 105/50 x 150 and 50 x 195 mm trunking</p> <p>10 106 03 Changeable internal bend from 85° to 95° for 65 x 105/65 x 150 and 65 x 195 mm trunking</p>	<p>End caps</p> <p>20 107 01 For 35 x 105 mm trunking</p> <p>20 107 02 For 50 x 105 mm trunking</p> <p>10 107 04 For 65 x 105 mm trunking</p>		
			<p>Junctions</p> <p>Flat junctions</p> <p>5 107 35 For 35 x 105 and 50 x 105 trunkings To tap-off to an 80 mm wide trunking</p> <p>5 107 33 For 65 x 105 mm trunking To tap-off to an 80 mm wide trunking</p> <p>5 107 37 For 50 x 105 mm trunking To tap-off to a 105 mm wide trunking equipped with a 65 mm cover</p> <p>5 107 36 For 35 x 105 and 50 x 105 trunkings To tap-off to a 105 mm wide trunking equipped with an 85 mm cover</p> <p>Angled junctions To tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80 or 50 x 105 mm trunking for Cat.No 104 22 and 104 23. Used with an internal angle Cat.No 106 01 or 106 02 or 106 03</p> <p>5 107 63 For 35 x 105 and 50 x 105 mm trunking</p> <p>5 107 64 For 65 x 105 mm trunking</p>		
			<p>Accessories</p> <p>50 106 82 Clip</p> <p>100 308 81 Base for clamp</p>		

Installation accessories (p. 836-838)

(1) Number of metres in pack

adaptable DLP trunking 50 x 150

trunking and fittings

Cat.Nos for 50 x 150 trunking



Selection chart (p. 825)
 Wiring capacity chart (p. 839)

Pack	Cat.Nos	Trunking	Pack	Cat.Nos	Angles and end caps (continued)												
10	<table border="0"> <tr> <td>1 comp. Cover 130 A</td> <td>2 comp. Cover 65 B</td> </tr> <tr> <td colspan="2">104 32⁽¹⁾</td> </tr> </table>	1 comp. Cover 130 A	2 comp. Cover 65 B	104 32 ⁽¹⁾		<p>Suitable for a wide range of requirements and applications:</p> <ul style="list-style-type: none"> - Distribution: large wiring capacity and wide access to the wiring space - Installation: can be used with ranges: Mosaic, Arteor, Lexic... <p>Body 50 x 150 mm Supplied without cover Length 2 m</p> <p>Flexible covers Fit on to the whole trunking including in internal or external angles Length 2 m</p> <p>Partitions Length 2 m</p> <ul style="list-style-type: none"> Partial cover width 65 mm Full cover width 130 mm <p>Partitions Length 2 m</p> <ul style="list-style-type: none"> Division partition, for fitting partial covers Separation partition <p>Joints</p> <ul style="list-style-type: none"> Body joint For aligning bases during installation Body joint, attached with adhesive (fit at the end of installation) Cover joint 	<table border="0"> <tr> <td>1 comp. Cover 130 A</td> <td>2 comp. Cover 65 B</td> </tr> <tr> <td>10</td> <td>106 22</td> </tr> <tr> <td>5</td> <td>106 35</td> </tr> <tr> <td>5</td> <td>107 89</td> </tr> <tr> <td>10</td> <td>107 03</td> </tr> </table> <p> Changeable external bend, from 60° to 120° for 50 x 80/50 x 105/50 x 150 and 50 x 195 mm trunkings</p> <p> Changeable external bend, from 60° to 120° for 50 x 150 and 50 x 195 mm trunkings</p> <p> 90° flat angle</p> <p> Left or right end cap</p>	1 comp. Cover 130 A	2 comp. Cover 65 B	10	106 22	5	106 35	5	107 89	10	107 03
1 comp. Cover 130 A	2 comp. Cover 65 B																
104 32 ⁽¹⁾																	
1 comp. Cover 130 A	2 comp. Cover 65 B																
10	106 22																
5	106 35																
5	107 89																
10	107 03																
20	105 24 ⁽¹⁾	<p>Partitions Length 2 m</p> <ul style="list-style-type: none"> Partial cover width 65 mm Full cover width 130 mm <p>Partitions Length 2 m</p> <ul style="list-style-type: none"> Division partition, for fitting partial covers Separation partition <p>Joints</p> <ul style="list-style-type: none"> Body joint For aligning bases during installation Body joint, attached with adhesive (fit at the end of installation) Cover joint 	<table border="0"> <tr> <td>5</td> <td>107 35</td> </tr> <tr> <td>5</td> <td>107 37</td> </tr> <tr> <td>5</td> <td>107 36</td> </tr> <tr> <td>5</td> <td>107 63</td> </tr> </table> <p>Junctions</p> <p>Flat junctions</p> <ul style="list-style-type: none"> To tap-off to an 80 mm wide trunking To tap-off to a 105 mm wide trunking equipped with a 65 mm cover To tap-off to a 105 mm wide trunking equipped with an 85 mm cover <p>Angled junction</p> <ul style="list-style-type: none"> To tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80 or 50 x 105 mm trunking Used with an internal angle Cat.No 106 02 or 106 06 	5	107 35	5	107 37	5	107 36	5	107 63						
5	107 35																
5	107 37																
5	107 36																
5	107 63																
10	<table border="0"> <tr> <td>1 comp. Cover 130 A</td> <td>2 comp. Cover 65 B</td> </tr> <tr> <td colspan="2">106 02</td> </tr> </table>	1 comp. Cover 130 A	2 comp. Cover 65 B	106 02		<p>Angles and end caps</p> <p>Internal and external bends Include the 2 components for the top and bottom of the trunking and 1 partition junction to ensure continuity of partitions and to hold the cover in place for the 2 compartments trunking only</p> <ul style="list-style-type: none"> Changeable internal bend, from 85° to 95° for 50 x 80/50 x 105/50 x 150 and 50 x 195 mm trunkings Changeable internal bend, from 85° to 95° for 50 x 150 and 50 x 195 mm trunkings 	<table border="0"> <tr> <td>50</td> <td> <table border="0"> <tr> <td>1 comp. Cover 130 A</td> <td>2 comp. Cover 65 B</td> </tr> <tr> <td>106 86</td> <td>106 81</td> </tr> </table> </td> </tr> <tr> <td>100</td> <td>308 81</td> </tr> </table> <p> Clip</p> <p> Base for clamp</p>	50	<table border="0"> <tr> <td>1 comp. Cover 130 A</td> <td>2 comp. Cover 65 B</td> </tr> <tr> <td>106 86</td> <td>106 81</td> </tr> </table>	1 comp. Cover 130 A	2 comp. Cover 65 B	106 86	106 81	100	308 81		
1 comp. Cover 130 A	2 comp. Cover 65 B																
106 02																	
50	<table border="0"> <tr> <td>1 comp. Cover 130 A</td> <td>2 comp. Cover 65 B</td> </tr> <tr> <td>106 86</td> <td>106 81</td> </tr> </table>	1 comp. Cover 130 A	2 comp. Cover 65 B	106 86	106 81												
1 comp. Cover 130 A	2 comp. Cover 65 B																
106 86	106 81																
100	308 81																

(1) Number of metres in pack

adaptable DLP trunking 65 x 150

trunking and fittings

Cat.Nos for 65 x 150 trunking



Compatible ranges

Selection chart (p. 825)
Wiring capacity chart (p. 839)

Pack	Cat.Nos	Trunking
8	104 33 ⁽¹⁾	<p>Suitable for a wide range of requirements and applications:</p> <ul style="list-style-type: none"> - Distribution: large wiring capacity and wide access to the wiring space - Installation: can be used with ranges: Mosaic, Arteor, Lexic... <p>Body 65 x 150 mm Supplied without cover Length 2 m</p> <p>Flexible covers Fit on to the whole trunking including in internal or external angles Length 2 m</p> <p>Partitions Length 2 m</p> <p>Joints</p>
20	105 24 ⁽¹⁾	<p>Partial cover width 65 mm Full cover width 130 mm</p>
8	105 21 ⁽¹⁾	<p>Partitions Length 2 m</p>
36	104 73 ⁽¹⁾	<p>Division partition, for fitting partial covers</p>
48	105 83 ⁽¹⁾	<p>Separation partition</p>
20	106 91	<p>Joints Body joint For aligning bases during installation</p>
20	106 92	<p>Body joint, attached with adhesive (fit at the end of installation)</p>
10	108 04 108 01	<p>Cover joint</p>

Pack	Cat.Nos	Angles and end caps
10	106 03	<p>Internal and external bends Include the 2 components for the top and bottom of the trunking and 1 partition junction to ensure continuity of partitions and to hold the cover in place for the 2 compartments trunking only</p> <p>Changeable internal bend, from 85° to 95° for 65 x 105/65 x 150 and 65 x 195 mm trunkings</p>
5	106 07	<p>Changeable internal bend, from 85° to 95° for 65 x 150/65 x 195 and 65 x 220 mm trunkings</p>

Pack	Cat.Nos	Angles and end caps (continued)
10	106 23	<p>Changeable external bend, from 60° to 120° for 65 x 105/65 x 150 and 65 x 195 mm trunkings</p>
5	106 36	<p>Changeable external bend, from 60° to 120° for 65 x 150/65 x 195 and 65 x 220 mm trunkings</p>
2	107 90	<p>90° flat angle</p>
10	107 06	<p>Left or right end cap</p>
5	107 33	<p>Junctions Flat junctions To tap-off to an 80 mm wide trunking</p>
5	107 38	<p>To tap-off to a 105 mm wide and 50 mm deep trunking</p>
5	107 64	<p>Angled junction To tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80 or 50 x 105 mm trunking Used with an internal angle Cat.No 106 03 or 106 07</p>
50	106 86	<p>Accessories Clip</p>
100	308 81	<p>Base for clamp</p>


Installation accessories (p. 836-838)

(1) Number of metres in pack

adaptable DLP trunking 50 x 195

trunking and fittings

Cat.Nos for 50 x 195 trunking

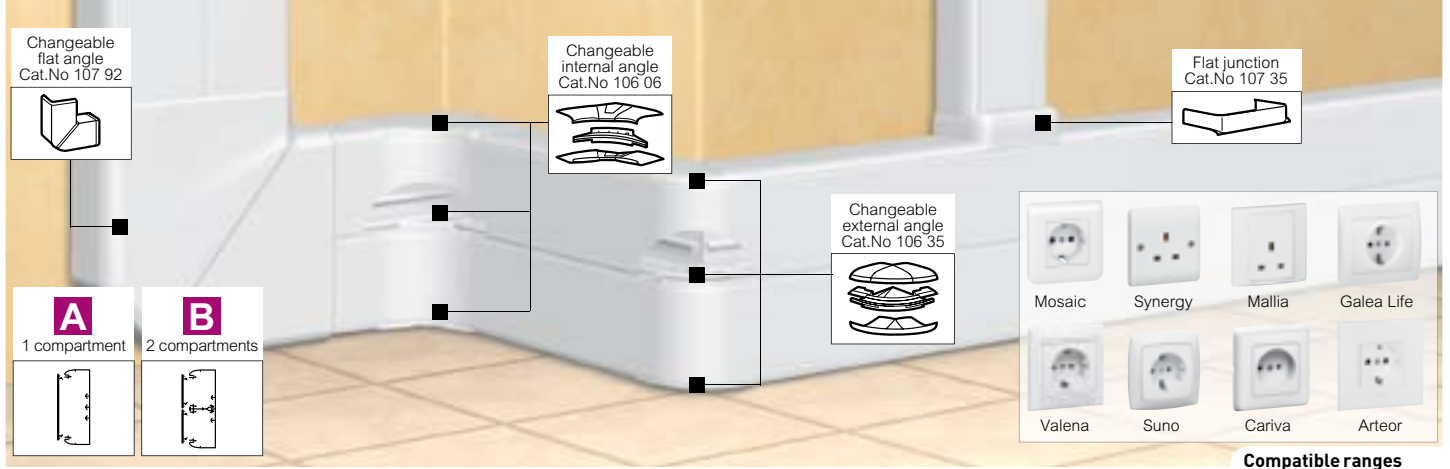

Compatible ranges

Selection chart (p. 825)
 Wiring capacity chart (p. 839)

Pack	Cat.Nos		Multi-compartment trunkings
8	1 comp. Cover 180 A	2 comp. Cover 85 B	Body 50 x 195 mm - Length 2 m Supplied without cover Flexible covers Fits onto the whole trunking including in internal or external angles Length 2 m Partial cover width 85 mm Full cover width 180 mm Partitions Length 2 m Division partition, for fitting partial covers Separation partition Joints Body joint, attached with adhesive (fit at the end of installation) Body joint For aligning bases during installation Cover joints for 85 mm cover Cover joint
20 8	105 26 ⁽¹⁾	105 22 ⁽¹⁾	
48		104 72 ⁽¹⁾	
24	105 82 ⁽¹⁾		
20		106 92	
20		106 91	
10 10	108 06	108 02	

Pack	Cat.Nos	Angles and end cap (continued)
2	107 92	Flat angle 90° flat angle
5	107 07	End cap Left or right end cap
Junctions		
5	107 35	Flat junctions To tap-off to an 80 mm wide trunking
5	107 37	To tap-off to a 105 mm wide trunking equipped with a 65 mm cover
5	107 36	To tap-off to a 105 mm wide trunking equipped with an 85 mm cover
5	107 63	Angled junction To tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80 or 50 x 105 mm trunking Used with an internal angle Cat.Nos 106 02, 106 06

Pack	Cat.Nos		Angles and end cap
5	1 comp. Cover 180 A	2 comp. Cover 85 B	Internal and external bends Include the 2 components for the top and bottom of the trunking on which the flexible cover and 1 and 2 partition joints fit respectively, ensuring continuity of the partitions and holding the covers in place, for 2 configurations Changeable internal bend, from 85° to 95° for 50 x 150 and 50 x 195 mm trunkings Changeable internal bend, from 85° to 95° for 50 x 80/50 x 105/50 x 150 and 50 x 195 mm trunkings Changeable external bend, from 60° to 120° for 50 x 150 and 50 x 195 mm trunkings Changeable external bend, from 60° to 120° for 50 x 80/50 x 105/50 x 150 and 50 x 195 mm trunkings
10		106 06	
10		106 02	
5		106 35	
10		106 22	

Pack	Cat.Nos	Accessories
50	106 82	Clip for 40, 65 and 85 mm covers
50	106 86	Clip for 180 mm cover
100	308 81	Base for clamp


Installation accessories (p. 836-838)

(1) Number of metres in pack

adaptable DLP trunking 65 x 195

trunking and fittings

Cat.Nos for 65 x 195 trunking

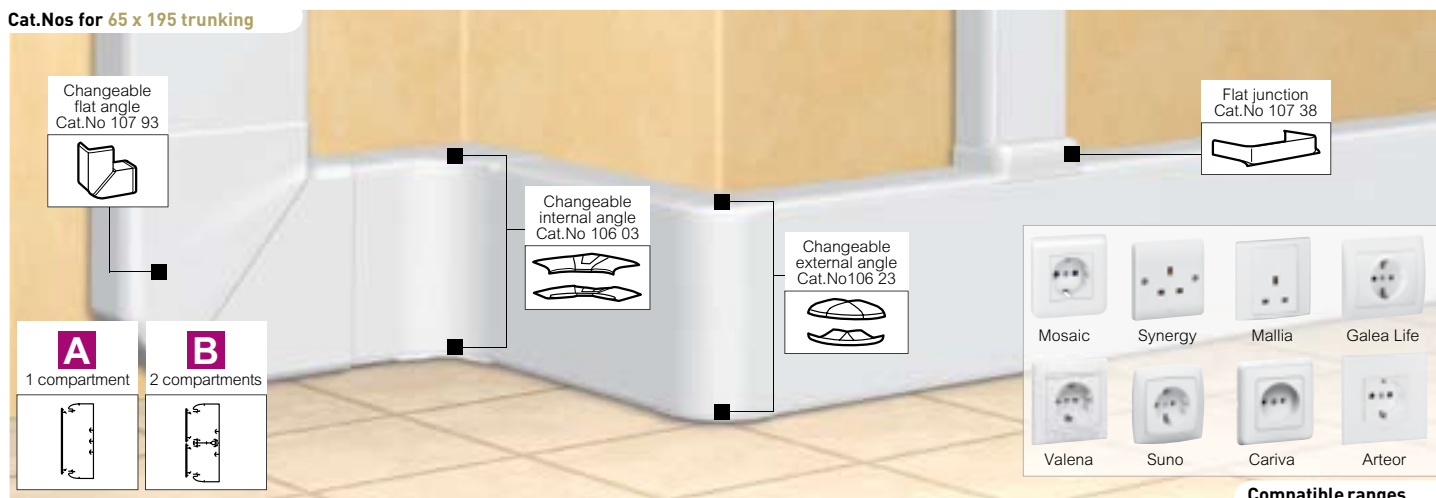

Compatible ranges

Selection chart (p. 825)
Wiring capacity chart (p. 839)

Pack	Cat.Nos		Multi-compartment trunkings
8	1 comp. Cover 180 A	2 comp. Cover 85 B	Body 65 x 195 mm Supplied without cover Length 2 m Flexible covers Fits onto the whole trunking including in internal or external angles Length 2 m Partial cover width 85 mm Full cover width 180 mm Partitions Length 2 m Division partition, for fitting partial covers Separation partition Joints Body joint, attached with adhesive (fit at the end of installation) Body joint For aligning bases during installation Cover joints for 85 mm cover Cover joint
20	105 26 ⁽¹⁾	105 22 ⁽¹⁾	Partial cover width 85 mm Full cover width 180 mm
8			
36		104 73 ⁽¹⁾	Partial cover width 85 mm Full cover width 180 mm
48	105 83 ⁽¹⁾		
20		106 92	Partial cover width 85 mm Full cover width 180 mm
20		106 91	
10		108 02	Partial cover width 85 mm Full cover width 180 mm
10	108 06		

Pack	Cat.Nos		Angles and end cap
	1 comp. Cover 180 A	2 comp. Cover 85 B	Internal and external bends Include the 2 components for the top and bottom of the trunking on which the flexible cover and 1 and 2 partition joints fit respectively, ensuring continuity of the partitions and holding the covers in place, for 2 configurations Changeable internal bend, from 85° to 95° for 65 x 150/65 x 195 and 65 x 220 mm trunkings Changeable internal bend, from 85° to 95° for 65 x 105/65 x 150 and 65 x 195 mm trunkings Changeable external bend, from 60° to 120° for 65 x 150/65 x 195 and 65 x 220 mm trunkings Changeable external bend from 60° to 120° for 65 x 105/65 x 150 and 65 x 195 mm trunkings
5		106 07	Partial cover width 85 mm Full cover width 180 mm
10	106 03		
5		106 36	Partial cover width 85 mm Full cover width 180 mm
10	106 23		

Pack	Cat.Nos	Angles and end cap (continued)
2	107 93	Flat angle 90° flat angle
5	107 07	End cap Left or right end cap
		Junctions Flat junctions To tap-off to an 80 mm wide trunking To tap-off to a 105 mm wide trunking equipped with a 65 mm cover Angled junction To tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80 or 50 x 105 mm trunking Used with an internal angle Cat.No 106 03 or Cat.No 106 07
5	107 33	Partial cover width 85 mm Full cover width 180 mm
5	107 38	
5	107 64	
50	106 82	Accessories Clip for 40, 65 and 85 mm covers
50	106 86	Clip for 180 mm cover
100	308 81	Base for clamp

Installation accessories (p. 836-838)

(1) Number of metres in pack

Mosaic™ socket outlets

Mosaic socket outlet Cat.No 774 02 with 4 modules support
Mosaic RJ 45 socket outlet with 2 modules support Cat.No 109 54



Mosaic socket outlet Cat.No 774 03 with 6 modules support
Mosaic socket outlet Cat.No 774 23 with 4 modules support




Mosaic 2 x 4 modules support Cat.No 109 54 for cover width 65 mm




Pack	Cat.Nos	Sockets for installation on trunking	
		Mosaic sockets with shutters with connection at both sides for mounting on 65 and 85 mm cover DLP trunking in conjunction with supports and plates for trunking (see p. 824 - 825) Direct connection requiring no tools, intuitive disconnection without dismantling the support	
		Standard	Tamperproof
10	774 01	774 21	2P+E
10	774 02	774 22	2 x 2P+E
10	774 03	774 23	3 x 2P+E
5	774 04	774 24	4 x 2P+E
		Red	
10	774 12		2 x 2P+E
10	774 13		3 x 2P+E

Automatic terminals - German standard




Pack	Cat.Nos	Sockets for installation on trunking (continued)	
		Standard	Tamperproof
10	776 01	776 21	2P+E
10	776 02	776 22	2 x 2P+E
10	776 03	776 23	3 x 2P+E
5	776 04	776 24	4 x 2P+E
		Red	
10	776 12		2 x 2P+E
10	776 13		3 x 2P+E

Screw terminals - German standard

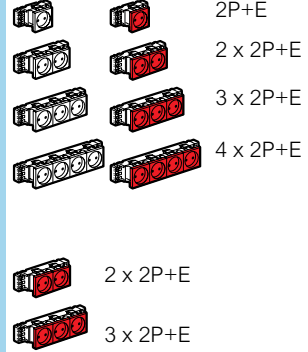

adaptable DLP trunking

mounting of wiring accessories

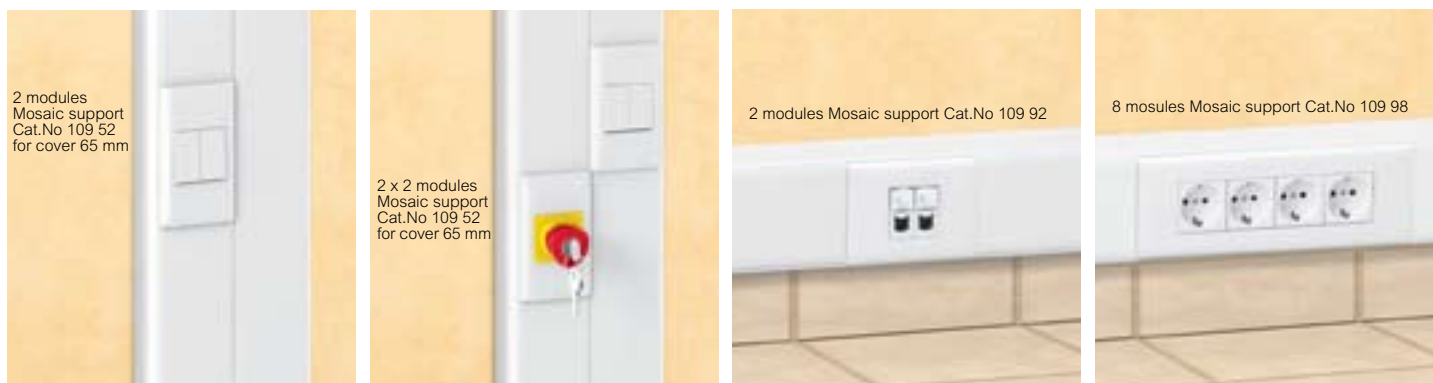

Selection chart (p. 825)
Wiring capacity chart (p. 839)

Pack	Cat.Nos	Supports for mounting wiring accessories
		Mosaic and Arteor supports (Other ranges: see opposite) Clip-on supports which can be fitted side by side Supplied with finishing plate
5	Cover 40 109 10	1 module
20	Cover 65 109 52	2 modules
20	109 54	4 modules
10	109 56	6 modules
10	109 58	8 modules
20	Cover 85 109 92	2 modules
20	109 93	3 modules
20	109 94	4 modules
10	109 96	6 modules
10	109 98	8 modules
10	109 27	Insulation unit for 2 modules, can be fitted together to create 4, 6 and 8 modules supports
		Legrand Lexic supports
5	Cover 65 109 25	For 2 modules
5	Cover 85 109 35	For 3 modules
5	Cover 130 109 65	For 6 modules

Pack	Cat.Nos	Supports for mounting wiring accessories (continued)
		Universal supports For any 60 mm fixing centres wiring accessories (Galea Life, Valena, Suno)
10	109 13	1 gang
5	109 23	2 gang
5	109 33	3 gang
	Cover 130	
5	109 14	1 gang
5	109 24	2 gang
5	109 34	3 gang
10	109 17	Insulation unit for 1 module
	Cover 130	
5	109 00	Hypra socket support For covers 130 mm

Pack	Cat.Nos	Supports for mounting wiring accessories alongside the trunking
		Use 1 frame plus 1 link accessory plus 1 slide for 35 mm width trunking and add 1 spacer for 50 mm width trunking
		Mosaic frames
10	316 21	2 x 4 modules
10	316 22	3 x 4 modules

Mounting of Synergy, Mallia and Milac wiring accessories:
Use 25 mm deep back boxes (Cat.Nos 6206 16 or 6206 26) or 35 mm deep back boxes (Cat.Nos 6206 17 or 6206 27) in 1 or 2 gang

accessories

adaptable and fully assembled DLP trunking



308 98 308 99



309 49



308 97



106 95



313 50



308 81




Flat junction
Cat.No 107 32



Wall feedthrough
Cat.No 106 98/99



Junction to floor duct
Cat.No 107 71 + 106 90

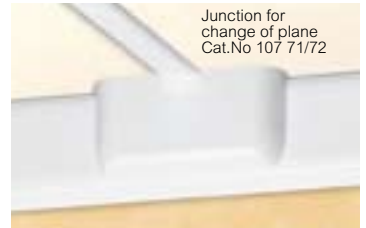

Junction for
change of plane
Cat.No 107 71/72

Pack	Cat.Nos	Section	Image
1	306 98	Cutting accessories for bodies DLPlus cutting unit for PVC DLP For cutting all plastic bodies Avoids vibration when cutting bases and covers Aluminium Dim.: 225 x 142 x 76 mm	
10	304 18	Insulation accessory Base joint Adjustable wall insulation joint, supplied in 5 m lengths Provides continuity between the profile and the wall, in particular in internal angles	
100	308 98	Fixing accessories for bodies For fixing all plastic profiles Wall plugs for immediate fixing No screws or nails required	
100	308 99		
12	309 49	Cartridge of Neoprene Adhesive for glue gun	
200	308 97	DLP rapid wall plug For 10 mm min. plasterboard walls at least 20 mm away from the concrete surface For fixing DLP plastic trunking in a single operation Used with a special tool for drill (Ø8 mm), supplied in each pack of 200 wall plugs Tensile resistance: 25 kg	
100	106 95	Spit end cap for DLP trunking For rapid fixing of trunkings with the Spit Pulsa 700 E (use 20 mm Spit nails)	
10	313 50	Junction boxes for DLP trunking Fitted with current separator Cable entry possible via the bottom of the box White junction boxes	
5	313 51		Dim.: 163 x 163 x 65 mm (except profile height 80 mm)
5	313 52		Dim.: 200 x 200 x 83 mm Dim.: 250 x 250 x 83 mm

Pack	Cat.Nos	Section	Image
10	343 98	Junction and routing accessories Base for Nylobloc auto terminals For up to 3 screwless connection terminals Nylobloc auto (Cat.Nos 343 22/23/25/28) Direct fixing: - in top of Plexo boxes and industrial plastic cabinets ≥ 130 x 130 mm - on flat bar 12 x 2 mm - in bottom of fully assembled, adaptable and aluminium DLP trunkings (from 50 x 80 mm) Screw fixing: - in bottom of Plexo boxes ≥ 105 x 105 mm and industrial plastic cabinets - universal Fixing on rail with accessory Cat.No 048 11 (p. 250) Accessible test socket Marking zone with felt tip pen Cat.No 395 98 (p. 354)	
20	312 10	Connection strips Connection strips with 4 x 4 mm ² terminals for junction boxes	
100	308 81	For high current cables Base for cable ties	
10	107 32	Flat junctions Base junctions	
5	107 33		
5	107 71	Junctions for change of plane To tap-off from wall to ceiling, for example to supply power to a luminaire	
5	107 72		For cover 65 mm
5	107 73		For cover 85 mm For trunking Cat.No 104 24
5	107 71+106 90	Junctions to floor duct To tap-off to floor duct Cat.No 328 00 (see p. 779)	
5	107 72+106 90		For cover 85 mm
5	106 98	Wall feedthroughs Provides a finish between the trunking and the wall	
5	106 99		For trunking 80 to 150 mm width For trunking 195 to 220 mm width

fully assembled and adaptable DLP trunking

■ New standard EN 50085-2-1

Classification EN 50085-2-1		Level
6.1	Void	
6.2	Resistance to impact for installation and application	2.0 J
6.3	Minimum storage and transport temperature	- 25 °C
6.3	Minimum installation and application temperature	- 5 °C
6.3	Maximum application temperature	+ 60 °C
6.4	Resistance to flame propagation	Non-flame propagating
6.5	Electrical continuity characteristic	Without electrical continuity characteristic
6.6	Electrical insulating characteristic	With electrical insulating characteristic
6.7	Degrees of protection provided by enclosure	IP 40
6.9	System access cover retention	With a tool
6.101	Position when surface mounted	Wall fixed, ceiling fixed, wall fixed and supported by the floor or other horizontal surface
6.102	Prevention of contact between liquids and insulated conductors and live parts in case of CTS/CDS mounted in a skirting position and wet-treatment of floor	Instructions restricting the installation position
6.103	The functions provided	Type 1, type 2 (distribution), type 3 (installation) Type 2: 104 32/33/52/53, type 3: other Cat. Nos
Rated current		500 V
Against mechanical shocks		IK 07

Composition and functions of fully assembled DLP trunking

Number of compartments	Trunking		Trunking and accessories					End cap ⁽²⁾	Angles			Flat junction ⁽³⁾		Supports for wiring accessories	Cross-section (mm ²)
	Covers width (mm)	Dim. (mm)	Bodies	Covers	Division partitions ⁽²⁾	Separation partitions ⁽²⁾	Base joints ⁽²⁾		Internal angle ⁽¹⁾	External angle ⁽¹⁾	Flat angle ⁽¹⁾	To width 80 mm ⁽²⁾	To width 105 mm ⁽²⁾		
1	65	50 x 80	104 62 (body and cover complete)	105 82	-	106 92 or 106 91	107 22	106 02	106 22	107 67	107 35	-	(3)	3340	
	65	50 x 105	104 24 (body and cover complete)	105 82	-	106 96	107 00	106 05	106 19	107 86	107 39	107 40	(3)	4380	
2	65 65	50 x 150	104 27 (body and cover complete)	105 82	-	106 92 or 106 91	107 03	106 06	106 35	107 89	107 35	107 36 107 37	(3)	3060/3060	
3	40 65 40	50 x 170	104 67 (body and cover complete)	105 82	-	106 92 or 106 91	107 10	106 50	106 38	107 98	107 35	107 36 107 37	(3)	2 x 2050/2770	

Composition and functions of adaptable DLP trunking

1	65	35 X 80	104 11	105 21	-	105 84	106 92 or 106 91	107 22	106 01	106 21	107 67	107 35	-	(3)	2240
	85	35 X 105	104 21	105 22	-	105 82	106 92 or 106 91	107 01	106 01	106 21	107 84	107 35	107 36	(4)	2850
	65	50 X 80	104 12	105 21	-	105 82	106 92 or 106 91	107 22	106 02	106 22	107 67	107 35	-	(3)	3340
	85	50 X 105	104 22	105 22	-	105 82	106 92 or 106 91	107 02	106 02	106 22	107 85	107 35	107 36 107 37	(4)	4300
	85	65 X 105	104 23	105 22	-	105 83	106 92 or 106 91	107 04	106 03	106 23	107 87	107 33	107 38	(4)	5740
	130	50 X 150	104 32	105 24	-	105 82	106 92 or 106 91	107 03	106 02	106 22	107 89	107 35	107 36 107 37	Distribution	6440
	130	65 X 150	104 33	105 24	-	105 83	106 92 or 106 91	107 06	106 03	106 23	107 90	107 33		Distribution	8200
	180	50 X 195	104 52	105 26	-	105 82	106 92 or 106 91	107 07	106 02	106 22	107 92	107 35	107 36 107 37	Distribution	8460
	180	65 X 195	104 53	105 26	-	105 83	106 92 or 106 91	107 07	106 03	106 23	107 93	107 33	107 38	Distribution	11240
2	65 65	65 X 150	104 33	2 x 105 21	104 73	105 83	106 92 or 106 91	107 06	106 07	106 36	107 90	107 33	107 38	(3)	3960/3960
	85 85	50 X 195	104 52	2 x 105 22	104 72	105 82	106 92 or 106 91	107 07	106 06	106 35	107 92	107 35	107 36 107 37	(4)	3940/3940
	85 85	65 X 195	104 53	2 x 105 22	104 73	105 83	106 92 or 106 91	107 07	106 07	106 36	107 93	107 33	107 38	(4)	5310/5310
	65 130	65 X 220	104 59	105 24 + 105 21	104 73	105 83	106 92 or 106 91	107 08	106 07	106 36	107 96	107 33	107 38	(3)	3960/8010

(1) Classification and performance are for a mounting at an angle of 90°

(2) See mounting and assembling instructions on technical sheets, boxes or on www.legrand.fr

(3) Universal and Mosaic supports for wiring accessories, cover width 65 mm : Cat.Nos 109 10/52/53/54/56/58

(4) Universal and Mosaic supports for wiring accessories, cover width 85 mm : Cat.Nos 109 92/93/94/96/98



Excellent screening and earthing properties



Mosaic



Synergy



Galea Life

- ▶ Takes Galea Life, Mosaic and Synergy ranges
- ▶ **Ideal for VDI installations**
- ▶ **Time-saving thanks to multi-covers,** removable separations, ready-to-use angles...

aluminium adaptable DLP trunking system

Nber of compart.	Cover width (mm)	Size (mm)	Body	Rigid covers	Separation partitions	Division partition
1	65 	50 x 105	111 14	111 10	111 08	-
	85 	50 x 105	111 00	111 11	111 08	-
	85 	65 x 105	111 01	111 11	111 09	-
2	65 65 	50 x 150	111 02	2 x 111 10	-	111 06
	65 65 	65 x 150	111 03	2 x 111 10	-	111 07
	85 85 	50 x 195	111 04	2 x 111 11	-	111 06
	85 85 	65 x 195	111 05	2 x 111 11	-	111 07

TRUNKINGS AND FITTINGS

End cap	Flat angle	External angle	Internal angle	Flat junction	Body joint	Cover joint
111 15	112 42	112 31	112 20	112 50	111 91	111 62
111 58	112 43	112 32	112 21	112 51	111 66 + 111 92	111 63
111 59	112 44	112 33	112 22	112 53	111 66 + 111 92	111 63
111 60	112 45	112 38	112 27	112 51	111 66 + 111 92	111 62
111 89	112 46	112 39	112 28	112 53	111 66 + 111 92	111 62
111 61	112 47	112 40	112 29	112 51	111 66 + 111 92	111 63
111 90	112 48	112 41	112 30	112 53	111 66 + 111 92	111 63


aluminium adaptable DLP trunking system

mounting of wiring accessories

		Cover width	
		65 mm	85 mm
		Cat.Nos	Cat.Nos
MOSAIC AND ARTEOR SUPPORTS - ALUMINIUM			
2 modules		112 02	112 12
3 modules		112 03	112 13
4 modules		112 04	112 14
6 modules		112 06	112 16
8 modules		112 08	112 18
MOSAIC SOCKET OUTLETS - ALUMINIUM - GERMAN STANDARD			
		Standard	Tamperproof
2 x 2P+E, 4 modules		792 82	774 22
3 x 2P+E, 6 modules		792 83	774 23
MOSAIC RJ 45 SOCKETS			
Aluminium		UTP	FTP
1 RJ 45 cat. 6		1 mod. 792 60 2 mod. 792 61	1 mod. 792 90 2 mod. 792 91
1 rear pluggable RJ 45 socket cat. 6 2 modules		786 26	786 27
1 rearpluggable RJ 45 socket cat. 5e 2 modules		786 24	786 25
UNIVERSAL SUPPORTS FOR GALEA LIFE, VALENA, SUNO			
		Cover width	
		85 mm	
1 gang		111 67	
2 gang		111 68	
3 gang		111 69	
4 gangs		111 70	


aluminium adaptable DLP trunking system 50 x 105 and 65 x 105

Cat.Nos for 50 x 105 trunking

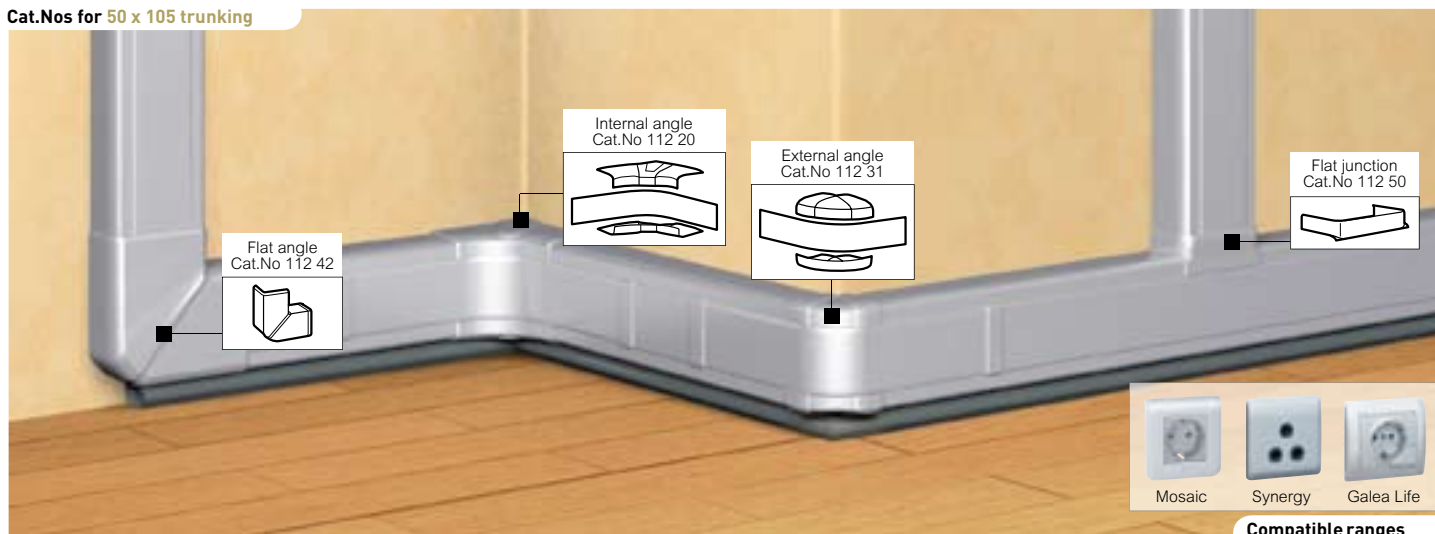

Selection chart (p. 840-841)


Pack	Cat.Nos	Body
8	50 x 105 111 14	Supplied without cover Length 2 m Cover 65 mm width



Pack	Cat.Nos	Cover and partition
16	111 10 ⁽¹⁾	Full rigid cover 65 mm width
24	111 08 ⁽¹⁾	Separation partition

Pack	Cat.Nos	Finishing accessories
20	50 x 105 111 15	End cap
10	112 42	Flat angle
1	112 31	External angle
1	112 20	Internal angle
5	112 50	Flat junction
20	111 91	Body joint
10	111 62	Cover joint for 65 mm cover

Pack	Cat.Nos	Bodies
8	50 x 105 65 x 105 111 00 ⁽¹⁾ 111 01 ⁽¹⁾	Supplied without cover length 2 m Cover 85 mm width




Pack	Cat.Nos	Cover and partition
16	111 11	Full rigid cover 85 mm width
24	50 x 105 65 x 105 111 08 ⁽¹⁾ 111 09 ⁽¹⁾	Separation partition

Pack	Cat.Nos	Finishing accessories
20 10	50 x 105 65 x 105 111 58 111 59	End cap
10	112 43 112 44	Flat angle
1	112 32 112 33	External angle
1	112 21 112 22	Internal angle
5	112 52 112 54	Flat junction For 50 x 105 trunking, cover width 65 mm
5	112 51 112 53	Flat junction For 50 x 105 trunking, cover width 85 mm
20	111 66	Body joint attached with adhesive (fit at the end of installation)
20	111 92	For aligning bases during installation
10	111 63	Cover joint for 85 mm cover

(1) Number of metres in pack

aluminium adaptable DLP trunking system 50 x 105, 65 x 150, 50 x 195 and 65 x 195

Cat.Nos for 50 x 195 trunking

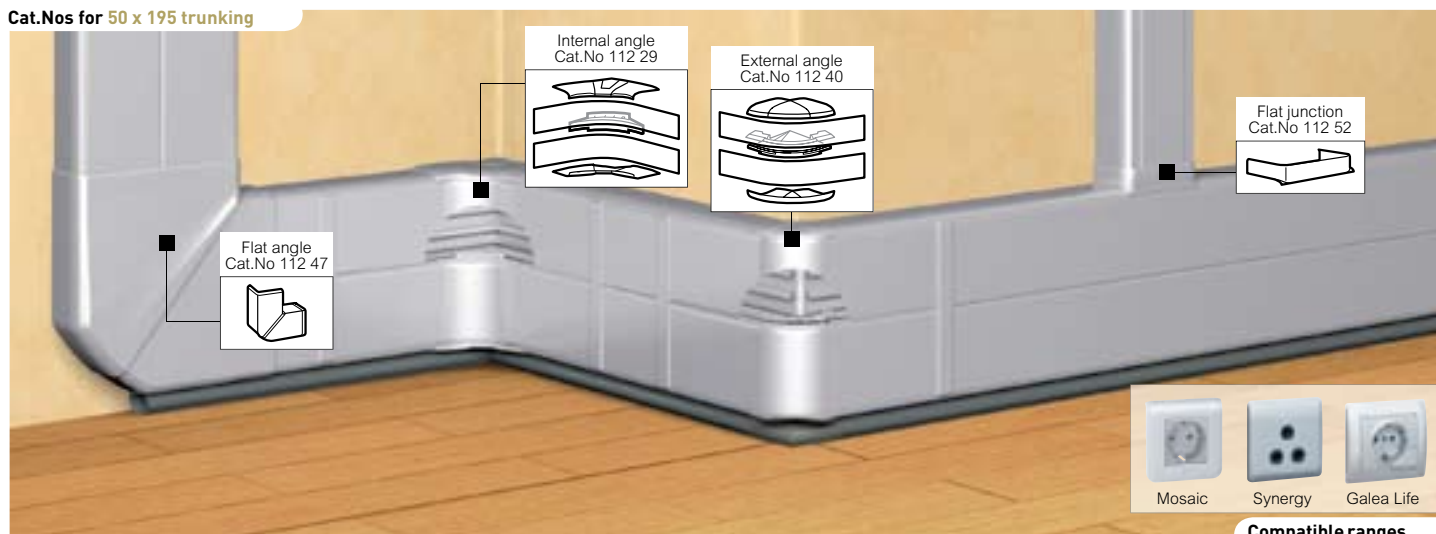

Selection chart (p. 840-841)

Pack	Cat.Nos	Bodies
4	50 x 150 111 02 ⁽¹⁾ 65 x 150 111 03 ⁽¹⁾	Supplied without cover Allow fitting of partial covers length 2 m

Pack	Cat.Nos	Covers and partitions
16 8	111 10 ⁽¹⁾ 111 12	Partial rigid cover 65 mm width Full rigid cover 130 mm width
12	50 x 150 111 06 ⁽¹⁾ 65 x 150 111 07 ⁽¹⁾	Division partition for cover 65 mm width
24	111 08 ⁽¹⁾ 111 09 ⁽¹⁾	Separation partition

Pack	Cat.Nos	Finishing accessories
10	50 x 150 111 60 65 x 150 111 89	End cap
5 2	112 45 112 46	Flat angle
1	112 38 112 39	External angle
1	112 27 112 28	Internal angle
5	112 52 112 54	Flat junction 50 x 105 trunking, cover width 65 mm
5	112 51 112 53	Flat junction 50 x 105 trunking, cover width 85 mm
20	111 66	Body joint attached with adhesive (fit at the end of installation)
20	111 92	For aligning bases during installation
10	111 62	Cover joint for 65 mm cover


Pack	Cat.Nos	Bodies
4	50 x 195 111 04 65 x 195 111 05	Supplied without cover Allow fitting of partial covers length 2 m

Pack	Cat.Nos	Covers and partitions
16	111 11 ⁽¹⁾	Partial rigid cover 85 mm width
24	50 x 195 111 08 ⁽¹⁾ 65 x 195 111 09 ⁽¹⁾	Separation partition
12	111 06 ⁽¹⁾ 111 07 ⁽¹⁾	Division partition for cover 85 mm width

Pack	Cat.Nos	Finishing accessories
10 5	50 x 195 111 61 65 x 195 111 90	End cap
5	112 47 112 48	Flat angle
1	112 40 112 41	External angle
1	112 29 112 30	Internal angle
5	112 52 112 54	Flat junction 50 x 105 trunking, cover width 65 mm
5	112 51 112 53	Flat junction 50 x 105 trunking, cover width 85 mm
20	111 66	Body joint attached with adhesive (fit at the end of installation)
20	111 92	For aligning bases during installation
10	111 63	Cover joint for 85 mm cover

(1) Number of metres in pack

aluminium adaptable DLP trunking system supports




112 02



112 04



112 08



111 67



111 68



111 69



106 82

Pack Cat.Nos Supports for Mosaic and Arteor

For 65 mm width covers

20	112 02		2 modules
20	112 03		3 modules
20	112 04		4 modules
10	112 06		6 modules
10	112 08		8 modules

For 85 mm width covers

20	112 12		2 modules
20	112 13		3 modules
20	112 14		4 modules
10	112 16		6 modules
10	112 18		8 modules

Pack Cat.Nos Supports for 60 mm fixing centres wiring accessories

For 85 mm width covers

10	111 67		1 gang
5	111 68		2 gang
5	111 69		3 gang
5	111 70		4 gang

Cabling accessories

50	106 82		Clip for 65 mm or 85 mm covers
50	106 86		Clip for 130 mm or 180 mm covers
20	111 88		Earth link
100	308 81		Base for cable ties


Mounting of Synergy, Mallia and Milac wiring accessories:

Use 25 mm deep back boxes (Cat.Nos 6206 16 or 6206 26) or 35 mm deep back boxes (Cat.Nos 6206 17 or 6206 27 in 1 or 2 gang)

DLP steel trunking system 63 x 130


with automatic cover earthing and custom earthed coupler

Cat.Nos for 63 x 130 trunking

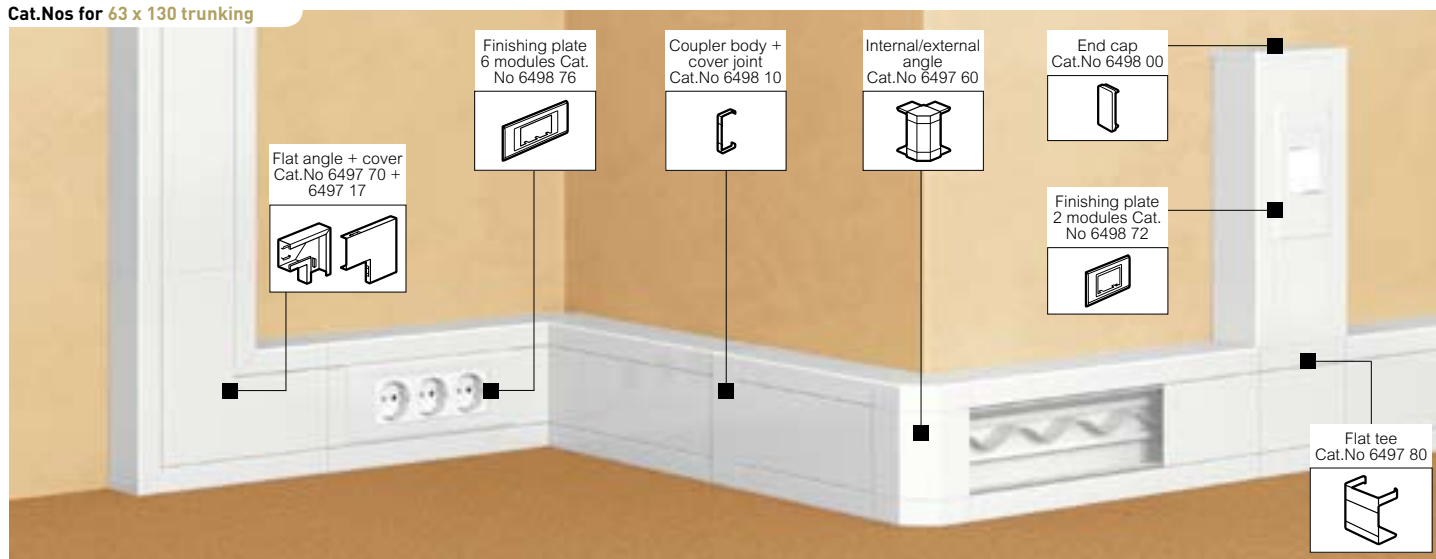

RAL 9010

Pack	Cat.Nos	Trunking
2	6497 00 ⁽¹⁾	Body 1 compartment Fixing holes Ø6.5 mm at 500 mm space Supplied without cover 63 x 130 mm Length: 2 m
15 10	6497 12 ⁽¹⁾ 6497 11 ⁽¹⁾	Covers Automatic earthing Full rigid cover 80 mm width Length: 1.5 m Length: 1 m
10	6497 23 ⁽¹⁾	Partition Separation partition Easy to mount with integrated cable retaining clip Length: 1 m
10	6497 30	Coupler Coupling set For aligning, connecting and earthing bodies
20	111 88	Earth link



Pack	Cat.Nos	Finishing accessories
1	6497 60	Universal internal/external angle
1	6497 70	Flat angle
2	6497 17	Cover for flat angle
1	6497 80	Flat tee
10	6498 40	Cable retaining clip
15	6498 00	End cap
10	6498 10	Coupler Body + cover joint

Pack	Cat.Nos	Finishing accessories (continued)
8	6498 20	Tolerance sleeve
100	6498 30	Wall feedthrough
100	6498 90	Touch-up paint RAL 9010 - 20 ml
10	6498 50	Cutting jig

Pack	Cat.Nos	Supports for Mosaic wiring accessories
10	6498 62	Clip on supports Supplied without finishing plate 2/3 modules
6	6498 64	4/6 modules
1	6498 72	Finishing plates 2 modules
1	6498 73	3 modules
1	6498 74	4 modules
1	6498 76	6 modules


Pack	Cat.Nos	Supports for 60 mm fixing centres wiring accessories
10	6498 81	Automatic fixing on C rail 1 gang mounting box - 71 x 71 mm
5	6498 82	2 gang mounting box - 140 x 71 mm
10	6498 80	Junction box Allows connection in trunking
20	6498 86	Coupling piece
10	6498 87	Cable clamp

(1) Number of metres in pack

DLP steel trunking system 63 x 170


with automatic cover earthing and custom earthed coupler

Cat.Nos for 63 x 170 trunking

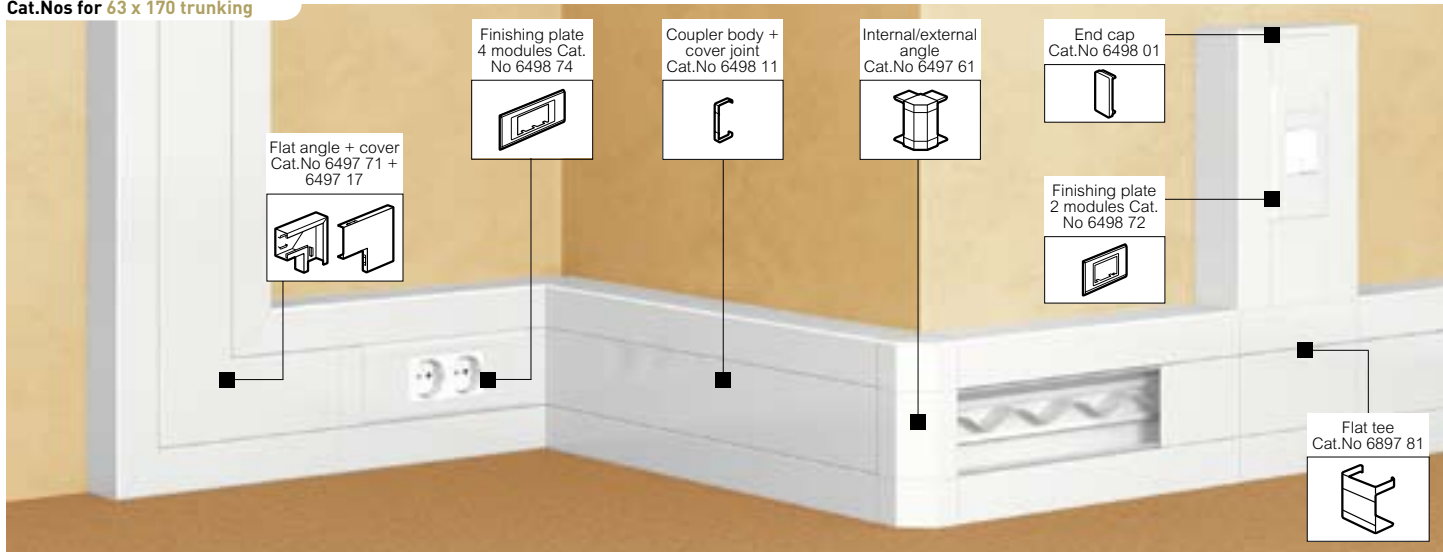

RAL 9010

Pack	Cat.Nos	Trunking
2	6497 01 ⁽¹⁾	Body 1 compartment Fixing holes Ø6.5 mm at 500 mm space Supplied without cover 63 x 170 mm Length: 2 m
15	6497 12 ⁽¹⁾	Covers Automatic earthing Full rigid cover 80 mm width Length: 1.5 m
10	6497 11 ⁽¹⁾	Length: 1 m
10	6497 23 ⁽¹⁾	Partition Separation partition Easy to mount with integrated cable retaining clip Length: 1 m
10	6497 31	Coupler Coupling set For aligning, connecting and earthing bodies
20	111 88	Earth link



Pack	Cat.Nos	Finishing accessories (continued)
8	6498 21	Tolerance sleeve
40	6498 31	Wall feedthrough
1	6498 90	Touch-up paint RAL 9010 - 20 ml
8	6498 51	Cutting jig
Supports for Mosaic wiring accessories		
Clip on supports Supplied without finishing plate		
1	6498 62	2/3 modules
1	6498 64	4/6 modules
Finishing plates		
1	6498 72	2 modules
1	6498 73	3 modules
1	6498 74	4 modules
1	6498 76	6 modules

Pack	Cat.Nos	Finishing accessories
1	6497 61	Universal internal/external angle
1	6497 71	Flat angle
2	6497 17	Cover for flat angle
1	6497 81	Flat tee
10	6498 41	Cable retaining clip
15	6498 01	End cap
10	6498 11	Coupler Body + cover joint


Pack	Cat.Nos	Supports for 60 mm fixing centres wiring accessories
10	6498 81	Automatic fixing on C rail 1 gang mounting box - 71 x 71 mm
5	6498 82	2 gang mounting box - 140 x 71 mm
10	6498 80	Junction box Allows connection in trunking
20	6498 86	Coupling piece
10	6498 87	Cable clamp

(1) Number of metres in pack

DLP steel trunking system 63 x 210

with automatic cover earthing and custom earthed coupler

Cat.Nos for 63 x 210 trunking

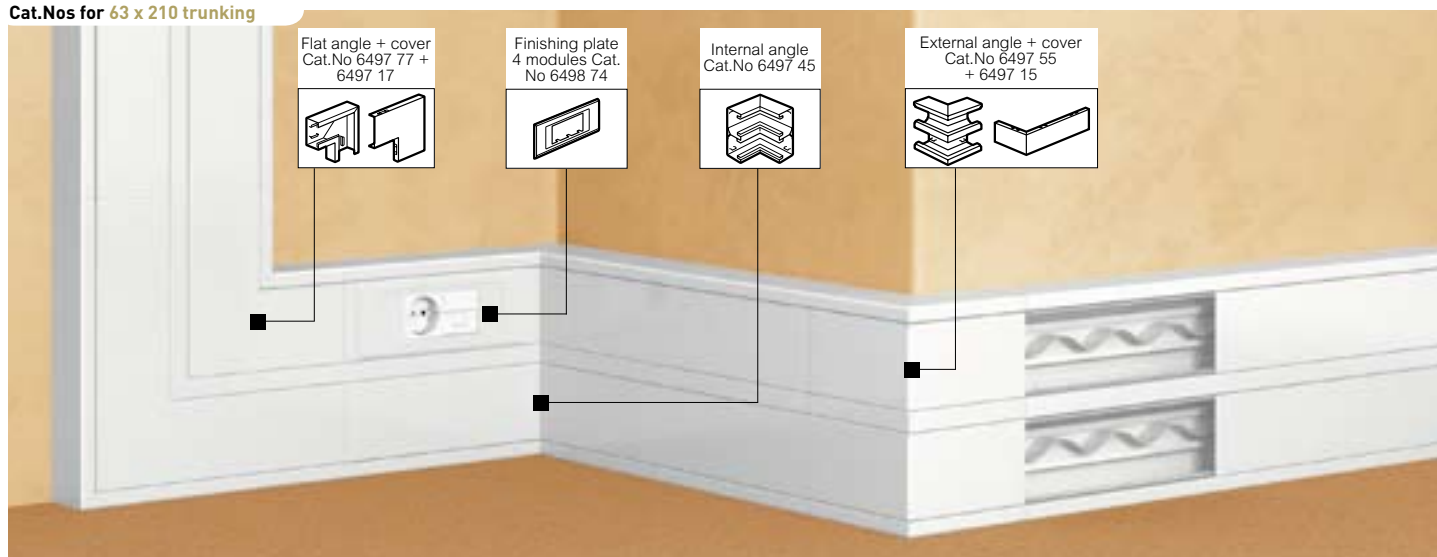

RAL 9010

Pack	Cat.Nos	Trunking
		Body 2 compartments Fixing holes Ø6.5 mm at 500 mm space Supplied without cover 63 x 210 mm Length: 2 m
2	6497 05 ⁽¹⁾	
		Covers Automatic earthing Full rigid cover 80 mm width Length: 1.5 m
15	6497 12 ⁽¹⁾	
10	6497 11 ⁽¹⁾	
		Partition Separation partition Easy to mount with integrated cable retaining clip Length: 1 m
10	6497 23 ⁽¹⁾	
		Coupler Coupling set For aligning, connecting and earthing bodies
10	6497 34	
20	111 88	Earth link

Pack	Cat.Nos	Finishing accessories
1	6497 45	Internal angle
1	6497 55	External angle
1	6497 15	Cover for external angle 2 pieces needed for Cat.No 6497 55
1	6497 77	Flat angle - supplied without cover
1	6497 17	Cover for flat angle 2 pieces needed for Cat.No 6497 77
10	6498 40	Cable retaining clip
15	6498 02	End cap

(1) Number of metres in pack

Pack	Cat.Nos	Finishing accessories (continued)
1	6498 15	Coupler Body + cover joint
8	6498 25	Tolerance sleeve
40	6498 32	Wall feedthrough
1	6498 90	Touch-up paint RAL 9010 - 20 ml
1	6498 52	Cutting jig

Pack	Cat.Nos	Supports for Mosaic wiring accessories
		Clip on supports Supplied without finishing plate
10	6498 62	2/3 modules
6	6498 64	4/6 modules
		Finishing plates
1	6498 72	2 modules
1	6498 73	3 modules
1	6498 74	4 modules
1	6498 76	6 modules

Pack	Cat.Nos	Supports for 60 mm fixing centres wiring accessories
		Automatic fixing on C rail
10	6498 81	1 gang mounting box - 71 x 71 mm
5	6498 82	2 gang mounting box - 140 x 71 mm
10	6498 80	Junction box Allows connection in trunking
20	6498 86	Coupling piece
10	6498 87	Cable clamp



NEW High safety thanks to halogen free

For highly frequented areas where safety is required for people and electronic equipment: airports, hospitals, factories, schools...




Halogen free trunking system

► In case of fire, halogen free trunking system offers high benefits:

- no toxic gases, limitation of corrosive gases
- low development of corrosive smokes
- low opacity fumes
- high temperature resistance

halogen free mini-trunking 25 x 25, 25 x 40, 40 x 60 mm

NEW

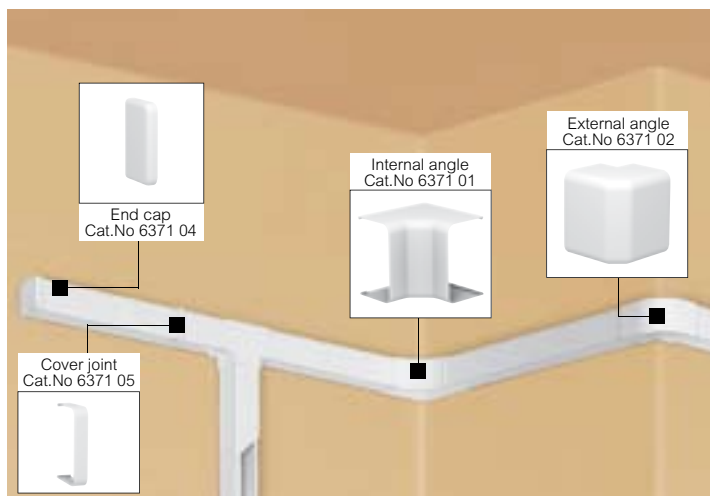


Pack	Cat.Nos	Halogen free mini-trunking
		PC ABS - 2 m (base and cover)
100	6371 00	25 x 25 mm
60	6371 10	25 x 40 mm
24	6371 20	40 x 60 mm
		Halogen free accessories
10	6371 04	End cap 25 x 25 mm
10	6371 14	End cap 25 x 40 mm
10	6373 14	End cap 40 x 60 mm
5	6371 03	Flat angle 25 x 25 mm
5	6371 13	Flat angle 25 x 40 mm
5	6373 13	Flat angle 40 x 60 mm
5	6371 01	Internal angle 25 x 25 mm
5	6371 11	Internal angle 25 x 40 mm
5	6373 11	Internal angle 40 x 60 mm
5	6371 02	External angle 25 x 25 mm
5	6371 12	External angle 25 x 40 mm
5	6373 12	External angle 40 x 60 mm
10	6371 05	Cover joint 25 x 25 mm
10	6371 15	Cover joint 25 x 40 mm
10	6373 15	Cover joint 40 x 60 mm
5	6371 06	Tee junction 25 x 25 mm
5	6371 16	Tee junction 25 x 40 mm
5	6373 16	Tee junction 40 x 60 mm

halogen free trunking for distribution and installation

NEW

50 x 85, 50 x 130, 50 x 190 mm

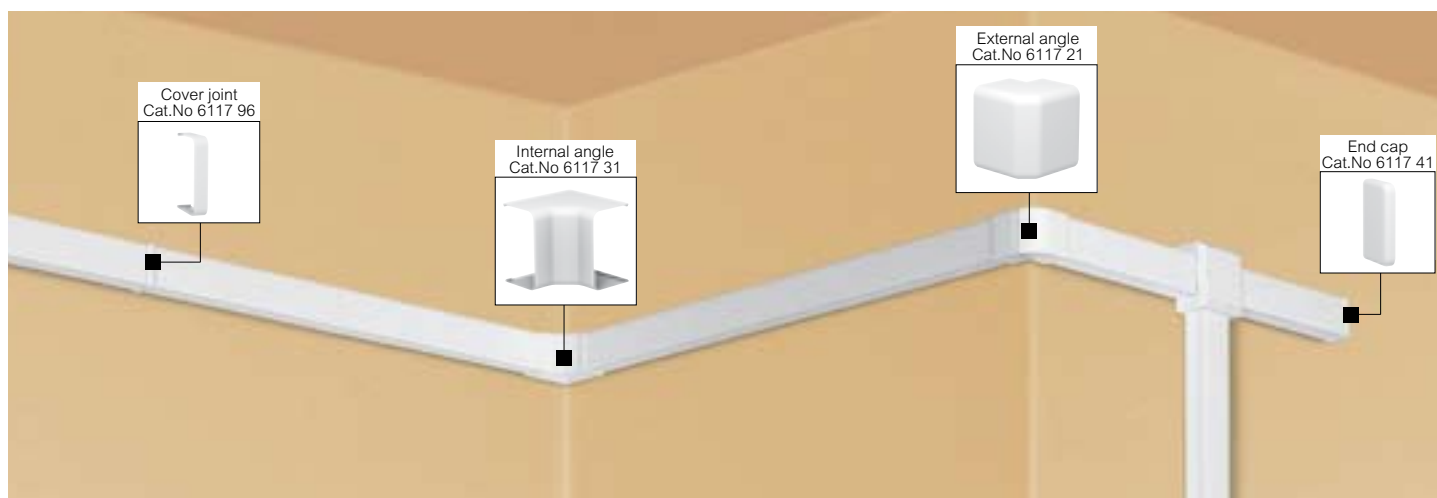


Pack	Cat.Nos	Halogen free trunking for distribution and installation
		PC ABS - white - 2 m - base and cover
24	6117 07	50 x 85 mm
12	6117 08	50 x 130 mm
12	6117 09	50 x 190 mm - 2 compartments
		Halogen free accessories
10	6117 41	End cap 50 x 85 mm
10	6117 43	End cap 50 x 130 mm
10	6117 45	End cap 50 x 190 mm
5	6117 11	Flat angle 50 x 85 mm
5	6117 13	Flat angle 50 x 130 mm
5	6117 15	Flat angle 50 x 190 mm
5	6117 31	Internal angle 50 x 85 mm
5	6117 33	Internal angle 50 x 130 mm
5	6117 35	Internal angle 50 x 190 mm
5	6117 21	External angle 50 x 85 mm
5	6117 23	External angle 50 x 130 mm
5	6117 25	External angle 50 x 190 mm
10	6117 51	Body joint 50 x 85 mm
10	6117 53	Body joint 50 x 130 mm
10	6117 55	Body joint 50 x 190 mm
20	6117 96	Cover joint 80 mm

Pack	Cat.Nos	Halogen free Mosaic supports and frames
10	6117 97	2 modules
5	6117 98	4 modules
5	6117 99	6 modules
		Halogen free universal supports
		For any 60 mm fixing centres wiring accessories
5	6117 88	Universal support
5	6117 89	Back box

DLP trunking for fluids 40 x 70 and 60 x 100

air-conditioning and plumbing applications

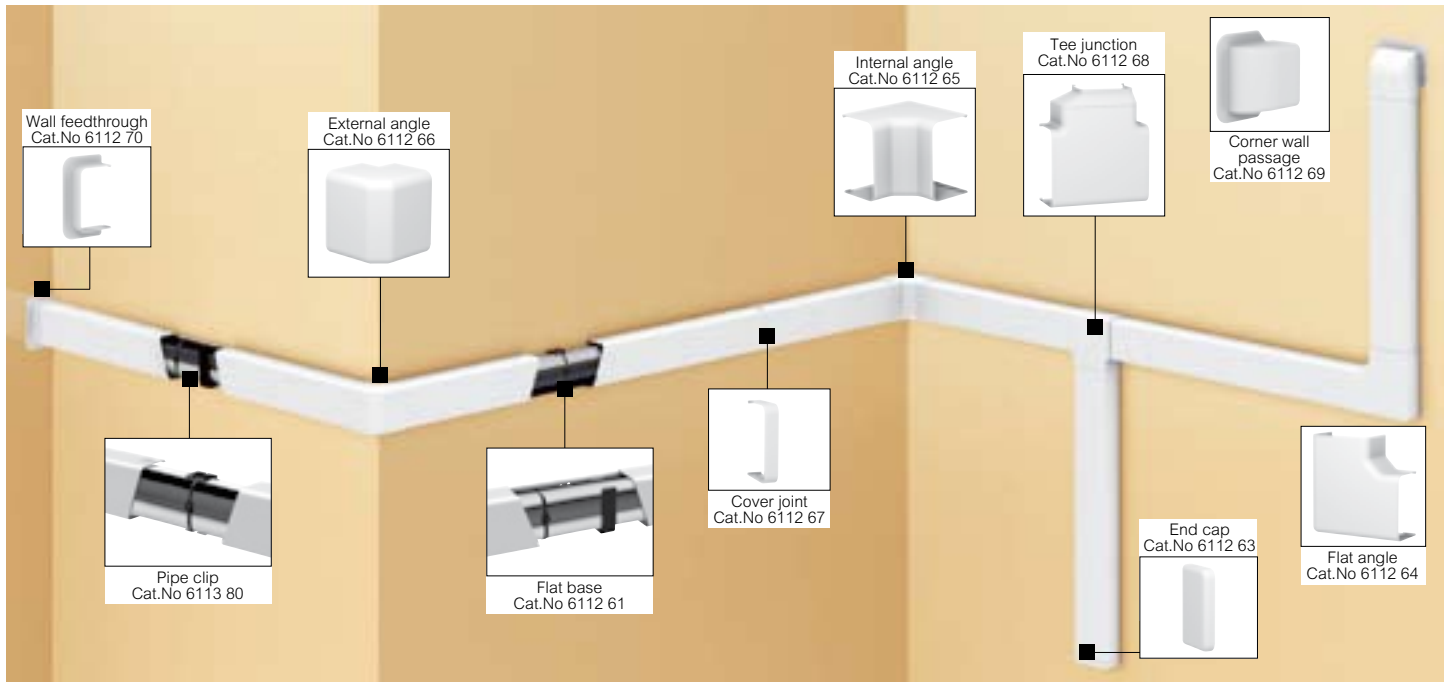

Pack	Cat.Nos		Trunking for air-conditioning and plumbing pipes
			Trunking with cover According to the installation requires a flat base and cover support
40 32	40 x 70 6112 60 ⁽¹⁾	60 x 100 6113 00 ⁽¹⁾	Cover Material PVC M1 White RAL 9016 Length 2 m
40 32	6112 61 ⁽¹⁾	6113 01 ⁽¹⁾	Flat base with retainers for air-conditioning installation Material PVC M1 White RAL 9016 Length 2 m
50	6113 80		Pipe clips Material Polypropylene For fitting air-conditioning pipes with thermal protection Capacity 15 to 45 mm
50	6113 81 I		For pipes with diameters between 10 and 22 mm

Pack	Cat.Nos		Finishing accessories
10 5	40 x 70 6112 63	60 x 100 6113 03	End Cap
10 5	6112 64	6113 04	Flat angle
10 5	6112 65	6113 05	Internal angle
10 5	6112 66	6113 06	External angle
10 5	6112 67	6113 07	Cover joint
5 2	6112 68	6113 08	Tee junction
10 5	6112 70	6113 10	Wall feedthrough
10 5	6112 69	6113 09	Corner wall feedthrough
1	6113 11		Reduction To be used with tee junction 60 x 100 Cat.No 6113 08


(1) Number of metres in pack

DLP trunking for fluids 40 x 70 and 60 x 100

air-conditioning and plumbing applications

■ Composition of the installation

For an air-conditioning installation:




	Less than 3000 W		Between 3000 and 5000 W		Greater than 5000 W	
	Liquid	Gas	Liquid	Gas	Liquid	Gas
	1/4"	3/8"	1/4"	1/2"	3/8"	5/8"
	∅25 mm	∅28 mm	∅25 mm	∅31 mm	∅28 mm	∅34 mm
40 x 70 single split						
60 x 100 single and dual-split						

■ Selection of mounting method


	Air-conditioning Application		Plumbing Application
40 x 70	6112 61	6113 80	6113 81
60 x 100	6113 01	6113 80	

■ Flat base installation


Cat.Nos 6112 61/6113 01



Easy assembly and alignment of flat bases



Oblong perforations in the bottom for quick fitting and easy adjustment of the base



Pipes can be pre-installed using pipe retainers positioned on the bottom as required, before being held in place by pipe ties

■ Pipe clip installation

Cat.No 6113 80



The installation supports can be adapted to fit 40 x 70 and 60 x 100 covers, and have reusable pipe clips to hold the pipes in place

■ Air-conditioning installation

1-Fix the support to the wall:

With flat base
Cat.Nos 6112 61/6113 01




Fixing the base



Fixing the ties and/or clips for holding the pipes in place

With pipe clip
Cat.No 6113 80



Adjusting the support according to the size of the cover



It is recommended that pipe clips are fitted every 50 cm to ensure alignment

2-Place and hook the pipes with a pipe tie



3-Cover it with the trunking



■ Plumbing installation

With plumbing pipe clip

Cat.No 6113 81



The plumbing pipe clip for 40 x 70 cover can take pipes of different diameters, ranging from 10 to 22 mm

DLPlus mini-trunking: profiles and accessories


BODIES	SECTION	FINISHING ACCESSORIES						
		End cap	Internal angle	External angle	Flat angle	Cover joint	Flat T junction	Junction box
Size and shape	Length 2.10 m							
20 x 12.5 	300 07 300 08	312 02	302 21	302 21	302 23	336 02	302 24	303 16 ⁽¹⁾
32 x 12.5 	300 14 300 15	312 03	302 51	302 51	302 53	336 03	302 54	303 16
32 x 16 	308 04	312 07	333 25	333 25	333 27	336 04	333 30	303 16
40 x 20 	300 27	312 11	302 81	302 81	302 83	336 06	302 08	303 16
60 x 20 	301 14	302 90	302 91	302 92	302 93	336 08	302 09	303 16
75 x 20 	300 07 300 33	303 00	303 01	303 02	303 03	336 09	302 18	303 16

(1) Dimensions: 75 x 75 mm
 (2) Dimensions: 110 x 110 mm
 (3) Dimensions: 150 x 150 mm



Cable-grip

It makes the installation easier and faster by containing all the wires inside the trunking body before the cover is clipped



Comfortable implementation

■ During installation, the conductors stay in place in the 1 or 2 compartment mini-trunking thanks to cable-grip membranes



Speed of installation

■ Cable holding is integrated with the trunking (no staple to add)
 ■ Easy conductors position
 ■ Quick cover fitting

DLPlus mini-trunking: wiring accessories frames

BODIES	Mosaic frames											
	Installation at the end of the mini-trunking ⁽¹⁾						Installation alongside the mini-trunking ⁽¹⁾					
Size and shape	2 modules ⁽²⁾	3 modules	4 modules ⁽³⁾	6 modules ⁽⁴⁾	2 x 4 modules ⁽⁵⁾	3 x 4 modules ⁽⁶⁾	2 modules ⁽²⁾	3 modules ⁽³⁾	4 modules ⁽⁴⁾	6 modules ⁽⁵⁾	2 x 4 modules ⁽⁶⁾	3 x 4 modules ⁽⁷⁾
	1 frame + 1 adaptor						1 frame + 1 adaptor					
20 x 12.5 	316 11 316 40	316 12 316 40	316 13 316 40	316 14 316 40	316 21 316 40	316 22 316 40	316 11 317 01	316 12 317 01	316 13 317 02	316 14 317 03	316 21 317 02	316 22 317 03
32 x 12.5 	316 11 316 41	316 12 316 41	316 13 316 41	316 14 316 41	316 21 316 41	316 22 316 41	316 11 317 01	316 12 317 01	316 13 317 02	316 14 317 03	316 21 317 02	316 22 317 03
32 x 16 	316 11 316 41	316 12 316 41	316 13 316 41	316 14 316 41	316 21 316 41	316 22 316 41	316 11 317 04	316 12 317 04	316 13 317 05	316 14 317 06	316 21 317 05	316 22 317 06
40 x 20 	316 11 316 47	316 12 316 47	316 13 316 47	316 14 316 47	316 21 316 47	316 22 316 47	316 11 317 07	316 12 317 07	316 13 317 08	316 14 317 09	316 21 317 08	316 22 317 09
60 x 20 	316 11 316 45	316 12 316 45	316 13 316 45	316 14 316 45	316 21 316 45	316 22 316 45	316 11 317 07	316 12 317 07	316 13 317 08	316 14 317 09	316 21 317 08	316 22 317 09
75 x 20 	-	-	316 13 316 48	316 14 316 48	316 21 316 48	316 22 316 48	316 11 317 07	316 12 317 07	316 13 317 08	316 14 317 09	316 21 317 08	316 22 317 09

(1) Use with Mosaic socket outlets
(2) Frame dimensions: 127 x 74 x 60 mm
(3) Frame dimensions: 149 x 74 x 60 mm

(4) Frame dimensions: 172 x 74 x 60 mm
(5) Frame dimensions: 217 x 74 x 60 mm

(6) Frame dimensions: 162 x 167 x 60 mm
(7) Frame dimensions: 228 x 167 x 60 mm


BODIES	Special surface mounting frames for wiring accessories (p. 859)		Surface mounting frames for 60 mm fixing centres wiring accessories		
	Installation alongside the mini-trunking		Installation alongside the mini-trunking		
Size and shape					
	1 gang for horizontal or vertical	2 gang for horizontal or vertical	1 gang for horizontal or vertical	2 gang for horizontal or vertical	3 gang for horizontal or vertical
20 x 12.5 	314 04	314 14	316 94	316 95	316 96
32 x 12.5 	314 04	314 14	316 94	316 95	316 96
32 x 16 	314 56	314 66	316 94	316 95	316 96
40 x 20 	314 08	314 18	316 94	316 95	316 96
60 x 20 	314 08	314 18	316 94	316 95	316 96
75 x 20 	314 08	314 18	316 94	316 95	316 96

DLPlus mini-trunking 20 x 12.5 and 32 x 12.5 profiles and finishing accessories



Selection chart (p. 852-853)
Wiring capacity chart (p. 858)

Pack	Cat.Nos		Mini-trunking
	20 x 12.5	32 x 12.5	EN 50085-2-1 approved
			Without central partition
			Mini-trunking with cable grip
			Equipped with an integrated device for holding cables in place
120 80	300 08 ⁽¹⁾	300 15 ⁽¹⁾	Length 2.10 m
			With central partition
120 80	300 07 ⁽¹⁾	300 14 ⁽¹⁾	Length 2.10 m



Pack	Cat.Nos		Finishing accessories
20	20 x 12.5 312 02	32 x 12.5 312 03	End cap
10	302 21	302 51	Changeable internal-external angle
10	302 23	302 53	Changeable flat angle
20	336 02	336 03	Cover joint
10	302 24	302 54	Flat T-junction

Pack	Cat.Nos	Special frames
		Supplied with end cap and divider for separation of currents
		Installation alongside the mini-trunking
		For vertical or horizontal mounting of surface mounting wiring accessories (p. 859)
10	314 04	1 gang
5	314 14	2 gang


Pack	Cat.Nos	Adaptors
		Adaptor for mounting Mosaic frames at end of the mini-trunking
10	316 40	For 20 x 12.5 mini-trunking
10	316 41	For 32 x 12.5 mini-trunking
		Adaptor for mounting Mosaic frames alongside the mini-trunking
10	317 01	For Mosaic frames Cat.Nos 316 11 and 316 12
10	317 02	For Mosaic frames Cat.Nos 316 13 and 316 21
5	317 03	For Mosaic frames Cat.Nos 316 14 and 316 22

Connection of luminaires (p. 857)

Frames for wiring accessories (p. 857)


(1) Number of metres in pack

DLPlus mini-trunking 32 x 16 and 40 x 20 profiles and finishing accessories

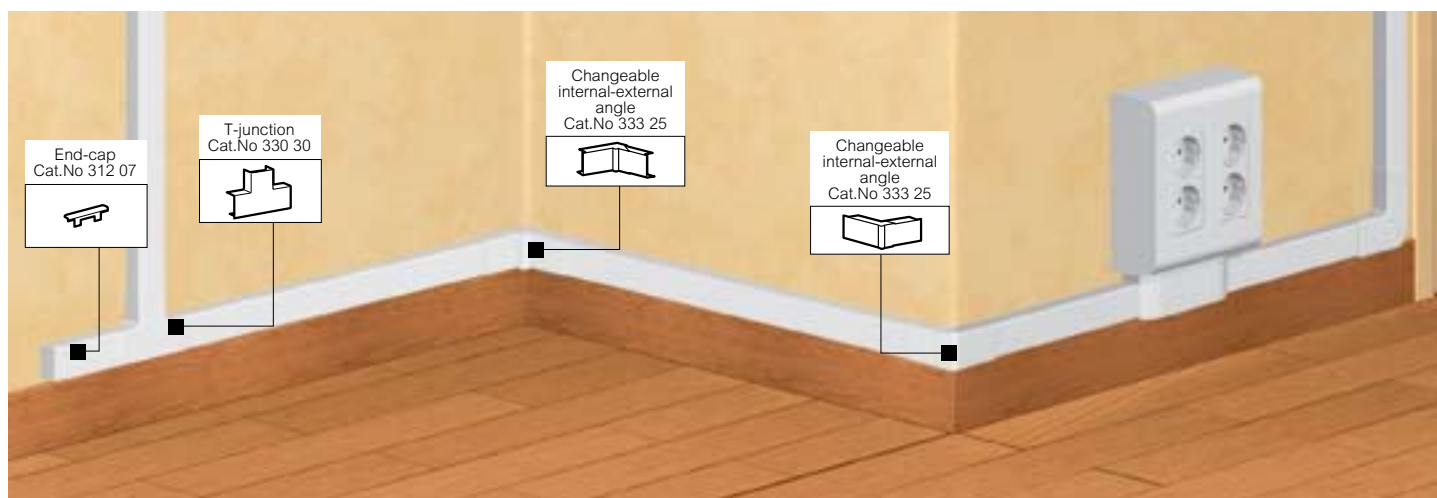

Selection chart (p. 852-853)
Wiring capacity chart (p. 858)

Pack	Cat.Nos	Mini-trunking with cable grip
60 48	32 x 16 40 x 20 308 04 ⁽¹⁾ 300 27 ⁽¹⁾	EN 50085-2-1 approved Equipped with an integrated device for holding cables in place Without central partition Length 2.10 m



Pack	Cat.Nos	Finishing accessories
10	32 x 16 40 x 20 312 07 312 11	End cap
10	333 25 302 81	Changeable internal-external angle
10	333 27 302 83	Changeable flat angle
20	336 04 336 06	Cover joint
10	333 30 302 08	Flat T-junction

Pack	Cat.Nos	Special frames
10	32 x 16 40 x 20 314 56 314 08	Supplied with end cap and divider for separation of currents Installation alongside the mini-trunking For vertical or horizontal mounting of surface mounting wiring accessories (p. 859) 1 gang
5	314 66 314 18	2 gang

Pack	Cat.Nos	Adaptors
10	32 x 16 40 x 20 316 41 316 47	Adaptors for mounting Mosaic frames at end of the mini-trunking For 32 x 16 and 40 x 20 mini-trunking
10	32 x 16 40 x 20 317 04 317 07	Adaptors for mounting Mosaic frames alongside the mini-trunking For Mosaic frames Cat.Nos 316 11 and 316 12
5	317 05 317 08	For Mosaic frames Cat.Nos 316 13 and 316 21
5	317 06 317 09	For Mosaic frames Cat.Nos 316 14 and 316 22


Connection of luminaires (p. 857)

Junction boxes (p. 857)

Frames for wiring accessories (p. 857)

(1) Number of metres in pack

DLPlus mini-trunking 60 x 20 and 75 x 20 profiles and finishing accessories

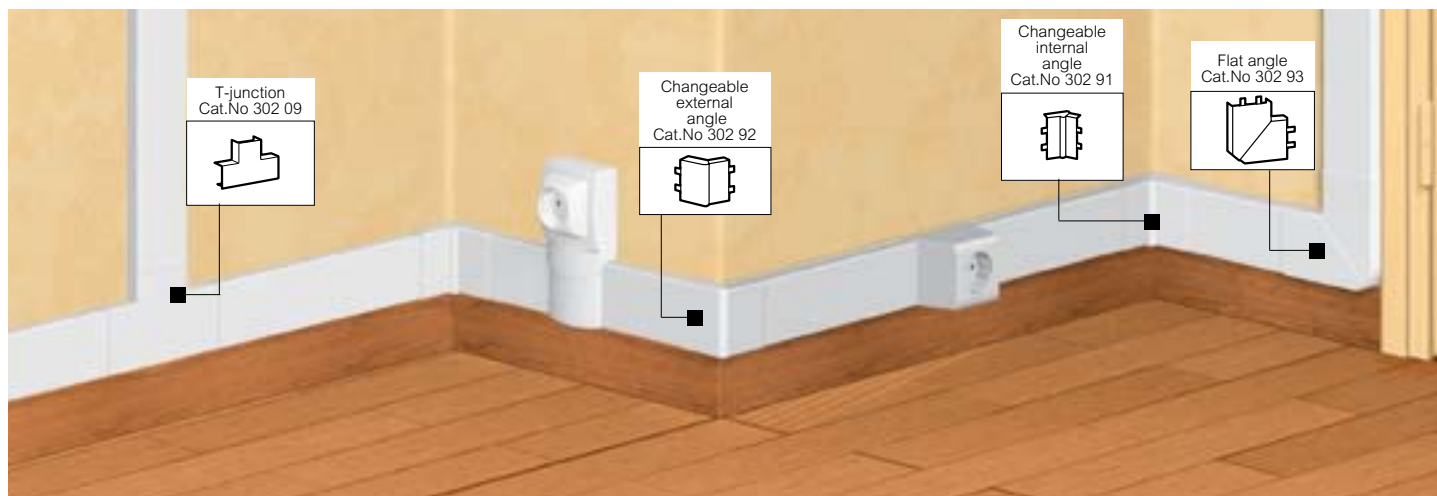

Selection chart (p. 852-853)
Wiring capacity chart (p. 858)

Pack	Cat.Nos	3-compartment mini-trunking
32 20	60 x 20 301 14 ⁽¹⁾ 75 x 20 300 33 ⁽¹⁾	3 compartments for distribution of high and low currents Length 2.10 m White

Pack	Cat.Nos	Finishing accessories
10	60 x 20 302 90 75 x 20 303 00	End cap
10	302 91 303 01	Changeable internal angle
10	302 92 303 02	Changeable external angle
10	302 93 303 03	Flat angle
20	336 08 336 09	Cover joint
10	302 09 302 18	Flat T-junction
1	328 05	Junction to floor duct

Pack	Cat.Nos	Special frames
10	314 08	Supplied with end cap and divider for separation of currents Installation alongside the mini-trunking For vertical or horizontal mounting of surface mounting wiring accessories (p. 859) 1 gang
5	314 18	2 gang

Pack	Cat.Nos	Adaptors
10	316 45	Adaptors for mounting Mosaic frames at the end of the mini-trunking For 60 x 20 mini-trunking
10	316 48	For 75 x 20 mini-trunking (for 4 and 6 modules only)
10	317 07	Adaptors for mounting Mosaic frames alongside the mini-trunking For Mosaic frames Cat.Nos 316 11 and 316 12
5	317 08	For Mosaic frames Cat.Nos 316 13 and 316 21
5	317 09	For Mosaic frames Cat.Nos 316 14 and 316 22

Frames for wiring accessories (p. 857)

(1) Number of metres in pack

DLPlus mini-trunking frames and installation accessories



Pack	Cat.Nos	Mosaic frames
		Supplied with support, plate and divider for separation of currents Vertical or horizontal mounting To be used with 2 module Mosaic sockets
10	316 11	2 modules
10	316 12	3 modules (for horizontal mounting only)
5	316 13	4 modules (for horizontal mounting only)
5	316 14	6 modules (for horizontal mounting only)
10	316 21	2 x 4 modules
10	316 22	3 x 4 modules

Pack	Cat.Nos	Junction boxes
		White
10	303 16	75 x 75 x 35 mm
10	303 26	110 x 110 x 50 mm
10	303 36	150 x 150 x 65 mm

Pack	Cat.Nos	60 mm fixing centres wiring accessories frames
		Installation alongside the mini-trunking Supplied with divider for separation of currents
5	316 94	1 gang, for vertical or horizontal mounting
5	316 95	2 gang, for horizontal mounting
5	316 96	3 gang, for horizontal mounting

Pack	Cat.Nos	Connection of luminaires
10	306 50	Plug-in ceiling rose unit supplied with connector Maximum suspended weight: 25 kg as long as unit is equipped with a suitable fixing device
135	306 67	Linking piece between the above unit and the ring trunking Length 3 m
10	302 16	Wall and ceiling tap-off for 40 x 20 mini-trunking
10	302 26	Wall and ceiling tap-off for 60/75 x 20 mini-trunking
10	333 17	Wall and ceiling tap-off for 32 x 12.5 mini-trunking
10	333 29	Wall and ceiling tap-off for 32 x 16 mini-trunking

Pack	Cat.Nos	Cutting accessory for trunking
1	306 98	DLPlus cutting unit For cutting all plastic trunking Avoids vibration when cutting bases and covers Aluminium Dim.: 225 x 142 x 76 mm

Pack	Cat.Nos	Insulation accessory
10	304 18	Base joint Adjustable wall insulation joint, supplied in 5 m lengths Provides continuity between the trunking and the wall, in particular in internal angles

Pack	Cat.Nos	Fixing accessories for trunkings
		For fixing all plastic trunkings
		Wall plugs for immediate fixing No screws or nails required
100	308 98	For mini-trunking
100	308 99	For mini-trunking, skirting trunking and trunking
		Cartridge of Neoprene
12	309 49	Adhesive for glue gun
		DLP rapid wall plug
200	308 97	For 10 mm min. plasterboard walls at least 20 mm away from the concrete surface For fixing DLP plastic trunking in a single operation Used with a special tool for drill (Ø8 mm), supplied in each pack of 200 wall plugs Tensile resistance: 25 kg

DLPlus mini-trunking

wiring capacity chart and installation

■ New standard EN 50085-2-1

Standard EN 50085-2-1 concerns electrical trunking systems for installation on walls or on the ceiling

This new system standard proposes a tiered classification which allows performance to be adapted to the target applications

To satisfy the requirements of NF C 15-100, Legrand has conformed to the current specifications of NF C 68-104 in terms of both performance and level of functions provided by the system

To this end, our installation trunking (which carries electrical wiring accessories) is type 3 (installation) in the new standard

Classification for DLPlus mini-trunking

New standard EN 50085-2-1		
6.2	Resistance to impact for installation and application	2.0 J
6.3	Minimum storage and transport temperature	- 25 °C
6.3	Minimum storage and application temperature	- 5 °C
6.3	Minimum application temperature	+ 60 °C
6.4	Resistance to flame propagation	Non-flame propagating
6.5	Electrical continuity characteristic	With electrical continuity characteristic
6.6	Electrical insulating characteristic	Without electrical insulating characteristic
6.7	Degrees of protection provided by enclosure	IP 40
6.9	System access cover retention	With a tool
6.101	Position when surface mounted	Wall fixed Ceiling fixed
6.102	Functions provided Rated current Protection against mechanical shocks	Type3 500 V IK 07

Compositions and functions of DLPlus mini-trunking systems (1 system per line)

DLPlus range		Finishing accessories							Frames
		End cap	Internal angle	External angle	Flat angle	Flat T-junction	Junction box	Cover joint	60 mm fixing centres
Size	Cat.Nos								
20 x 12.5 	300 07/ 300 08	312 02	302 21	302 21	302 23	302 24	303 16	336 02	316 94/ 316 95/ 316 96
32 x 12.5 	300 14/ 300 15	312 03	302 51	302 51	302 53	302 54	303 16	336 03	316 94/ 316 95/ 316 96
32 x 16 	308 04	312 07	333 25	333 25	333 27	333 30	303 16/ 303 26	336 04	316 94/ 316 95/ 316 96
40 x 20 	300 27	312 11	302 81	302 81	302 83	302 08	303 16/ 303 26/	336 06	316 94/ 316 95/ 316 96
60 x 20 	301 14	302 90	302 91	302 92	302 93	302 09	303 16/ 303 26/ 303 36	336 08	316 94/ 316 95/ 316 96
75 x 20 	300 33	303 00	303 01	303 02	303 03	302 18	303 16/ 303 26/ 303 36	336 09	316 94/ 316 95/ 316 96

surface-mounting wiring accessories



860 01



860 31



860 40

Pack	Cat.Nos	Switches
10	860 01	Two-way switch 10 AX - 250 V~
10	860 06	Push-button - NO - 6 A - 250 V~
Socket outlets		
10	860 31	2P+E socket outlet German standard 16 A - 250 V~ shuttered for child safety
10	860 29	2P+E socket outlet German standard 16 A - 250 V~
TV socket		
10	860 40	TV single socket - 0 - 2400 MHz

When removing the frame, can be installed in DLPlus mini-trunking systems
(p. 854 to 856)

cable guide and mini-trunking with adhesive



300 98




300 99



6489 00



6489 01



6489 03

Pack	Cat.Nos	Cable guide with adhesive
132	300 98 ⁽¹⁾	For cable \varnothing 3 to 6 mm
90	300 99 ⁽¹⁾	For cable \varnothing 7 and 9 mm

This cable guide is used to rapidly attach a cable to a wall without damaging it. It is equipped with a double base insulating the nail or the staple from the cable. 2 mounting systems are provided:
- nail or staple mounting
The base is pre-drilled every 10 cm
- adhesive foam mounting: foam base equipped with a self-adhesive film (1 mm thick)
Length: 2.10 m
Supplied with cover
Material: PVC

Pack	Cat.Nos	Mini-trunking with adhesive
96	6489 00 ⁽¹⁾	16 x 16 mm without partition
60	6489 01 ⁽¹⁾	25 x 16 mm without partition
36	6489 02 ⁽¹⁾	40 x 16 mm without partition
36	6489 03 ⁽¹⁾	40 x 25 mm without partition

This mini-trunking is used to rapidly attach a cable to a wall without damaging. Supplied with cable-grip
Color: white RAL 903
Length: 3 m



Fixing devices for conduits and cables
see p. 754-755

(1) Number of metres in pack

DLPlus mini-trunking system for cable distribution

selection chart for distribution trunking and accessories

SECTION			FINISHING ACCESSORIES				
Section (in mm)	2 m		End cap	or	Internal angle	or	External angle
	Cat.Nos	Pack	Cat.Nos		Pack		Pack
16 x 16	6363 00	128	6364 00		100		
25 x 16	6363 02	80	6364 20		60		
32 x 16	6363 04	64	6364 40		60		
40 x 16	6363 06	50	6364 60		60		
32 x 25	6363 05	48	6364 50		60		
40 x 25	6363 07	40	6364 70		60		
40 x 40	6363 08	24	6364 80		30		
60 x 40	6363 09	16	6364 90		30		

■ Characteristics

One finishing accessories for 3 applications

Pre-pierced trunking, easy to screw it to the wall, no covering tap



Internal angle



External angle



End cap and cover joint

■ Calculation of the usable cross-section

Simply add together the usable cross-sections of the conductors or cables you want to run in one compartment

Type of conductor or cable (mm ²)	Cable									
	1 conductor		2 conductors		3 conductors		4 conductors		5 conductors	
	Usable cross-section (mm ²)	Max. Ø (mm)	Usable cross-section (mm ²)	Max. Ø (mm)	Usable cross-section (mm ²)	Max. Ø (mm)	Usable cross-section (mm ²)	Max. Ø (mm)	Usable cross-section (mm ²)	Max. Ø (mm)
1.5	44	6.6	111	10.5	121	11	144	12	169	13
2.5	49	7	133	11.5	157	12.5	169	13	211	14.5
4	58	7.6	169	13	183	13.5	211	14.5	256	16
6	68	8.2	196	14	225	15	256	16	307	17.5
10	85	9.2	256	16	289	17	343	18.5	400	20
16	111	10.5	43	18.5	381	19.5	441	21	529	23
25	157	12.5	484	22	553	23.5	651	25.5	784	28
35	183	13.5	601	24.5	676	26	813	28.5	993	31.5
50	225	15	-	-	841	29	1057	32.5	-	-

The usable cross-sections in the above table are theoretical, and correspond to the minimum dimensions of the conductors. You must assign a packing coefficient of 30 % to get closer to the actual conditions in installations

Example

1) Cables needed

- 2 cables 3 x 1.5²
- 3 cables 4 x 4²

2) Calculation of dimensions (mm²)

• 2 x 121 = 242

• 3 x 211 = 633

Total = 875

Packing coefficient: 30 %

⇒ 875 x 1.3 = 1137.5 mm²

■ Choice of section


Choose the profile that has sufficient capacity




Continuation of the example

In our example, 40 x 40 mm mini-trunking meets the requirements for the site

Usable cross-section (mm ²)	Max. Ø in mm	Required sections
180	15	16 x 16
300	15	25 x 16
385	15	32 x 16
650	24	23 x 25
470	15	40 x 15
830	24	40 x 25
1380	36	40 x 40
2075	36	60 x 40

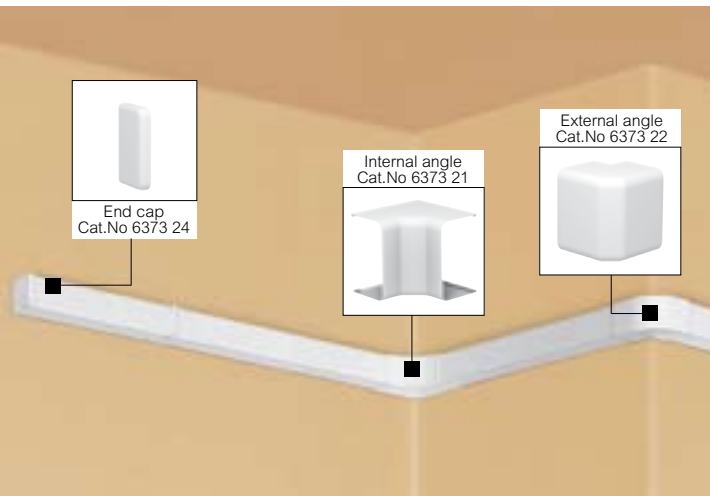DLP trunking for cable distribution



Pack	Cat.Nos	DLP trunking for cable distribution
		PVC - 2 m (base and cover)
20	6373 20	40 x 90 mm
24	6373 50	60 x 60 mm
16	6373 60	60 x 90 mm
12	6373 70	60 x 120 mm
		Finishing accessories
10	6373 24	 End cap 40 x 90
10	6373 54	End cap 60 x 60
10	6373 64	End cap 60 x 90
10	6373 74	End cap 60 x 120
5	6373 21	 Internal angle 40 x 90
5	6373 51	Internal angle 60 x 60
5	6373 61	Internal angle 60 x 90
5	6373 71	Internal angle 60 x 120
5	6373 22	 External angle 40 x 90
5	6373 52	External angle 60 x 60
5	6373 62	External angle 60 x 90
5	6373 72	External angle 60 x 120

Halogen free trunking (p. 848)



Others sections, 40 x 40 to 80 x 200 mm
Please consult us

DLP trunking for cable distribution

Characteristics

Cable retention system on large sections

Section equipped with clips which can be cut by hand and loops for cable ties



Internal and external variable angles



Classification

New standard EN 50085-2-1		Default choice
6.2	Résistance to impact for installation and application	2.0 J
6.3	Minimum storage and transport temperature	- 25 °C
6.3	Minimum storage and application temperature	- 5 °C
6.3	Minimum application temperature	+ 60 °C
6.4	Resistance to flame propagation	Non-flame propagating
6.5	Electrical continuity characteristic	Without electrical continuity characteristic
6.6	Electrical insulating characteristic	Without electrical insulating characteristic
6.7	Degrees of protection provided by enclosure	IP 40
6.9	System access cover retention	With a tool
6.101	Position when surface mounted	Wall fixed Ceiling fixed
6.102	Functions provided Rated current Protection against mechanical shocks	Type3 500 V IK 07