
muRata Inductor Data Sheet

"#" indicates a package specification code.



LQP03TN0N6B02D , LQP03TN0N6B02J , LQP03TN0N6B02B

## Shape

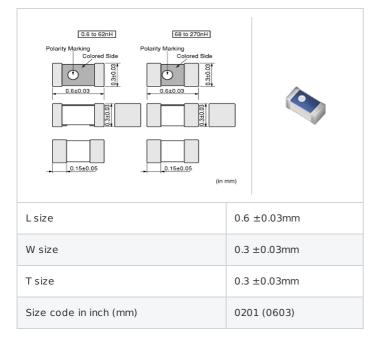

Packaging code	Specifications	Minimum quantity	
D	$\phi$ 180mm Paper taping	15000	
J	$\phi$ 330mm Paper taping	50000	
В	Packing in bulk	500	

	Mass (Typ.)	
piece		0.0002g

## Specifications

Inductance	0.6nH ±0.1nH
Inductance test frequency	500MHz
Rated current (Itemp) (Based on Temperature rise)	850mA
Max. of DC resistance	0.07Ω
Q (min.)	14
Q test frequency	500MHz
Self resonance frequency (min.)	20000MHz
Operating temperature range (Self-temperature rise is not included)	-55~125℃

References


1


## 🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

## Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

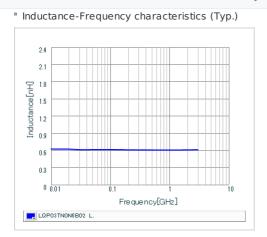

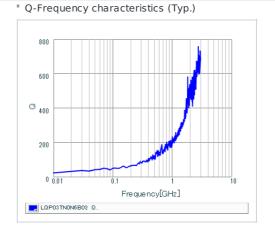

Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.